

Han[®] HsB



Contents

Page

Han[®] HsB.....

07.2

Han
HsB

07
i

Han® HsB



Features

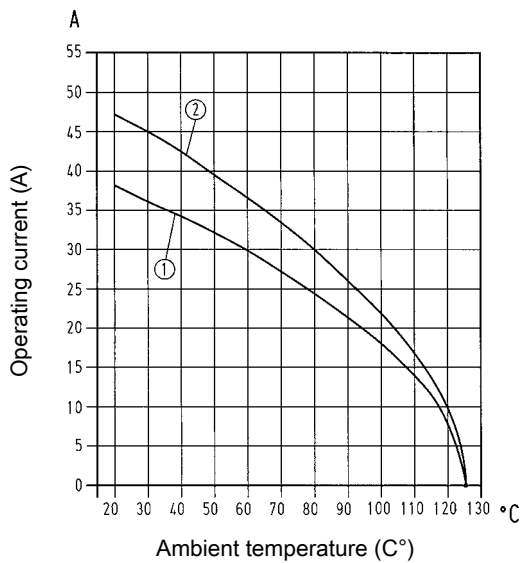
- Screw termination with wire protection
- Suitable for power supply applications
- Termination with standard screw driver

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Wire cross section 4 mm²
- ② Wire cross section 6 mm²

Technical characteristics

Contacts	6, 12
Electrical data acc. to IEC 61984	35 A 400/690 V 6 kV 3
Rated current	35 A
Rated voltage conductor - ground	400 V
Rated voltage conductor - conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
alternative electrical data	35 A 500 V 6 kV 3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	≥10 ¹⁰ Ohm
Limiting temperatures	-40 °C ... 125 °C
Flammability (insert) acc. to UL 94	V 0
Mating cycles	≥500
Material (insert)	polycarbonate
Colour (insert)	RAL 7032 (light grey)
Material (contact)	copper alloy

Specifications and approvals

IEC 60664-1
IEC 61984



Han HsB

Han® 6 HsB


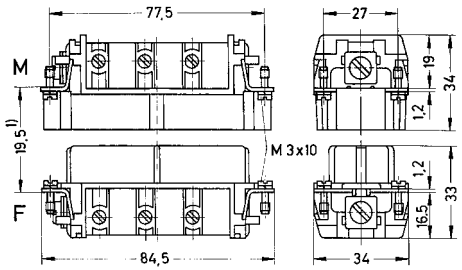

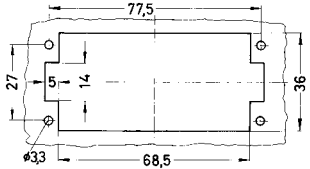
Size 16 B



Number of contacts

6+

400/690 V
35 A

Identification	Wire cross section (mm²)	Part number		Drawing Dimensions in mm
		male	female	
Han® HsB, Screw terminal, silver plated contacts, contact resistance ≤1 mOhm 	1.5 – 6	09 31 006 2601	09 31 006 2701	 <p>1) Distance for contact max. 21 mm Tightening torque axial screw 1.2 Nm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for inserts for use without hoods/housings</p>

Han
HsB

Han® 12 HsB

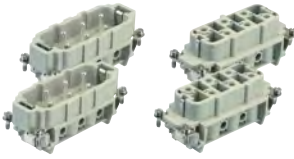
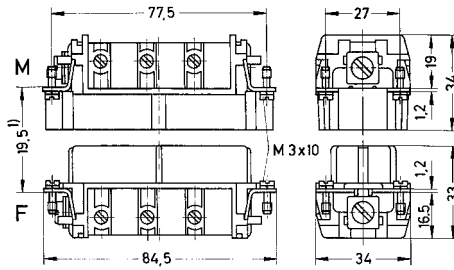

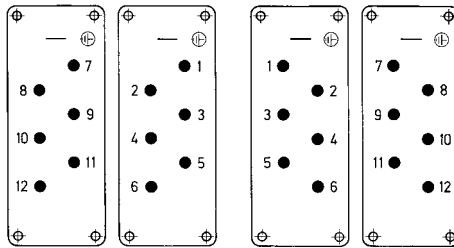
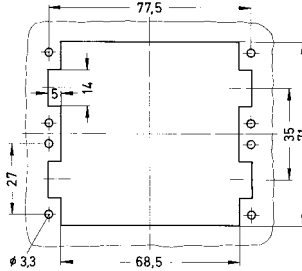
Size 32 B



Number of contacts

12+

400/690 V
35 A

Identification	Wire cross section (mm ²)	Part number		Drawing Dimensions in mm
		male	female	
Han® HsB, Screw terminal, 1 - 6, silver plated contacts, contact resistance ≤1 mOhm  <p>Please order two inserts for a complete assembly!</p>	1.5-6	09 31 006 2601	09 31 006 2701	 <p>1) Distance for contact max. 21 mm Tightening torque axial screw 1.2 Nm</p>
Han® HsB, Screw terminal, 7 - 12, silver plated contacts, contact resistance ≤1 mOhm  <p>Please order two inserts for a complete assembly!</p>	1.5-6	09 31 006 2611	09 31 006 2711	 <p>M F Contact arrangement (view from termination side)</p>  <p>Panel cut out for inserts for use without hoods/housings</p>

Han HsB