



Contact Spacing 2.0mm, Board To Board Connectors

EBB14 SERIES (Female Header)

■ FEATURES

- Available in Straight, Right angle
- Contact spacing: 2.0mm
- No. of contacts: 02~50 pin. / per row
- Packaging: Bag

■ SPECIFICATIONS

1.ELECTRICAL

- Current rating: 1.0~3.0A (see drawing)
- Contact resistance: 20mΩ max.
- Insulation resistance: 1000MΩ min.
- Operating Temperature: -40 to +105℃

■ MATERIALS

1.MATERIAL

- Contacts: Brass
- Insulator Housing:
High Temp Thermoplastic

2.PLATING

Contact:

- Nickel In All Area
- Gold over Nickel. (RoHS Compliant)

■ PACKING

1.Packing method


1-1.Packaging: Bag

2.Information on label (stuck to each ploy bag, reel and box)

- | | | | |
|--------------|------------------|--------------|--------------|
| (1)Part NO. | (2)Section. | (3)Lot NO. | (4)Quantity. |
| (5)QC stamp. | (6)Reprocess NO. | (7)ECE mark. | |




■ PART NUMBERING SYSTEM

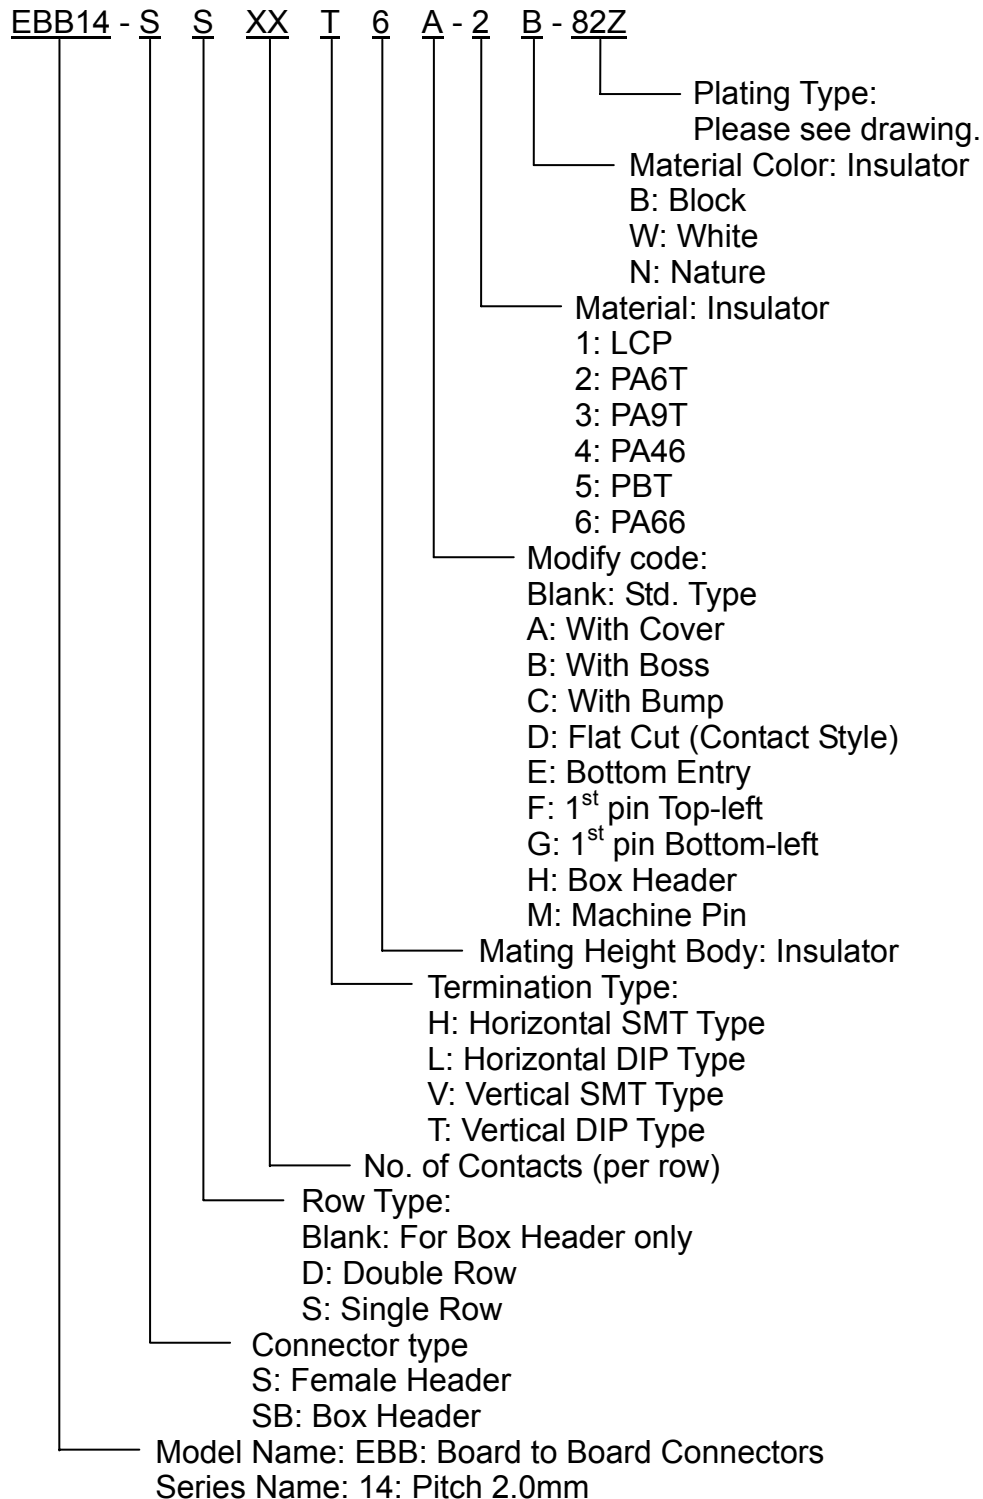


**■ DIMENSIONS UNIT:mm**

DIMENSIONS UNIT:mm
EBB14-SBxxT_Box Header Series



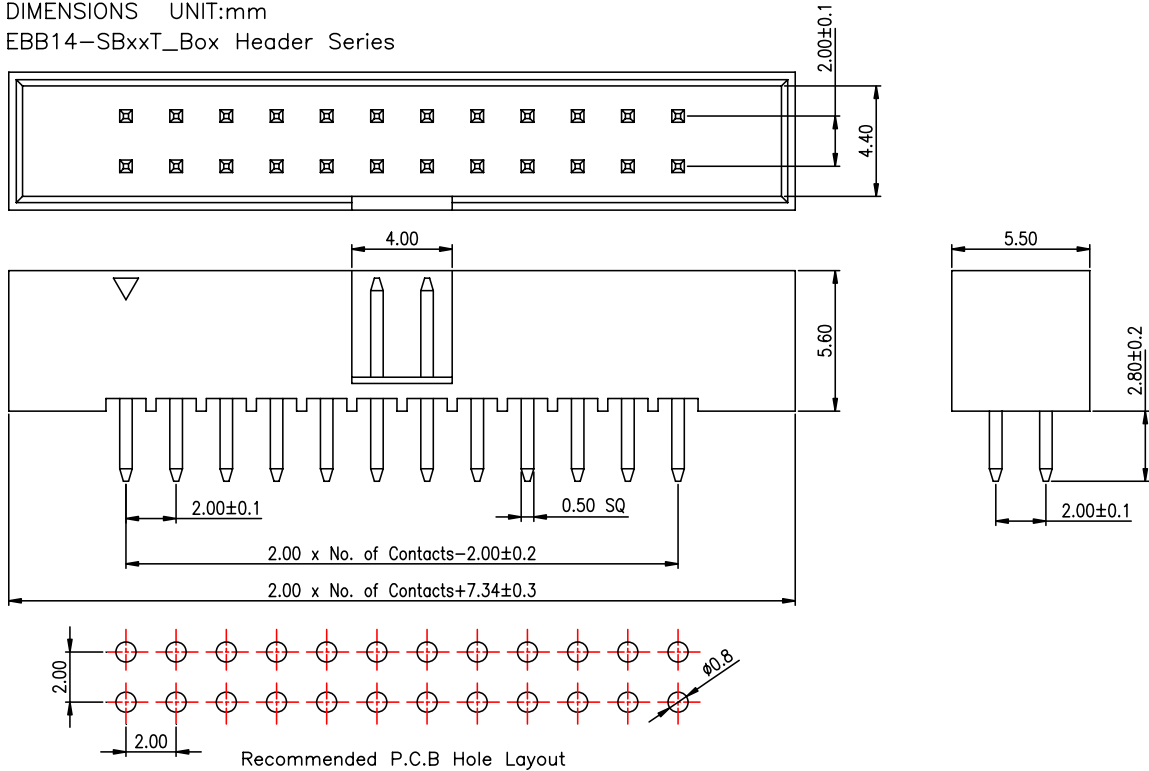


DIMENSIONS UNIT:mm
EBB14-SSxxT

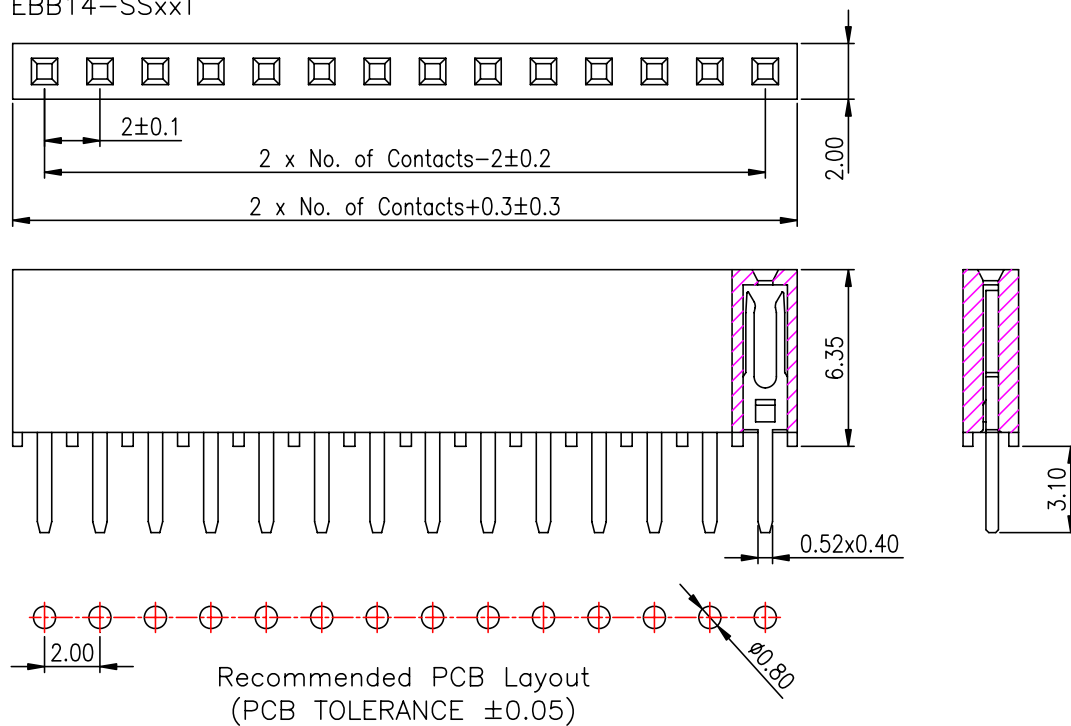




DIMENSIONS UNIT:mm
EBB14-SDxxL

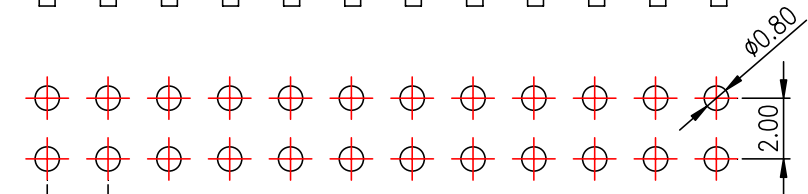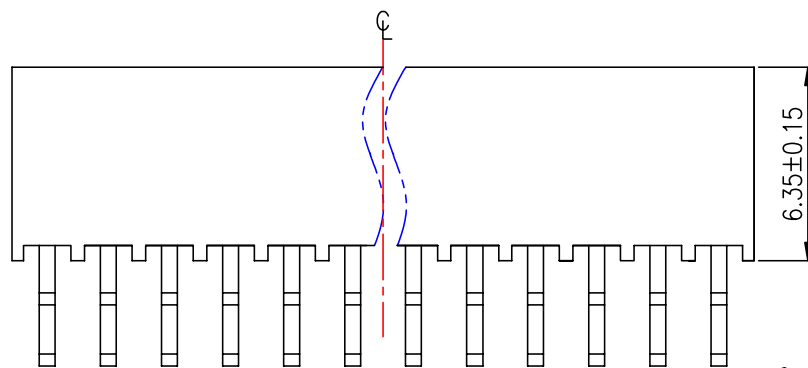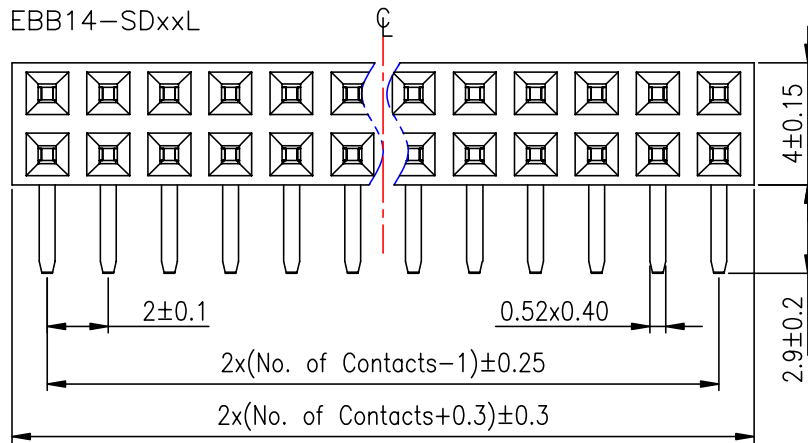

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)





DIMENSIONS UNIT:mm
EBB14-SDxxV

