



Contact Spacing 1.27mm, Board To Board Connectors

EBB15 SERIES (Female / Box Header)

■ FEATURES

- Available in Straight, Right angle
- Contact spacing: 1.27mm
- No. of contacts: 02~50 pin. / per row (see drawing)
- Packaging: Bag

■ SPECIFICATIONS

1.ELECTRICAL

- Current rating: 1.0~3.0A (see drawing)
- Contact resistance: 20mΩ max.
- Insulation resistance: 1000MΩ min.
- Operating Temperature: -40 to +105℃

■ MATERIALS

1.MATERIAL

- Contacts: Brass
- Insulator Housing:
High Temp Thermoplastic

2.PLATING

Contact:

- Nickel In All Area
- Gold over Nickel. (RoHS Compliant)

■ PACKING

1.Packing method


1-1.Packaging: Bag.

2.Information on label (stuck to each ploy bag, reel and box)

- | | | | |
|--------------|------------------|--------------|--------------|
| (1)Part NO. | (2)Section. | (3)Lot NO. | (4)Quantity. |
| (5)QC stamp. | (6)Reprocess NO. | (7)ECE mark. | |






■ PART NUMBERING SYSTEM

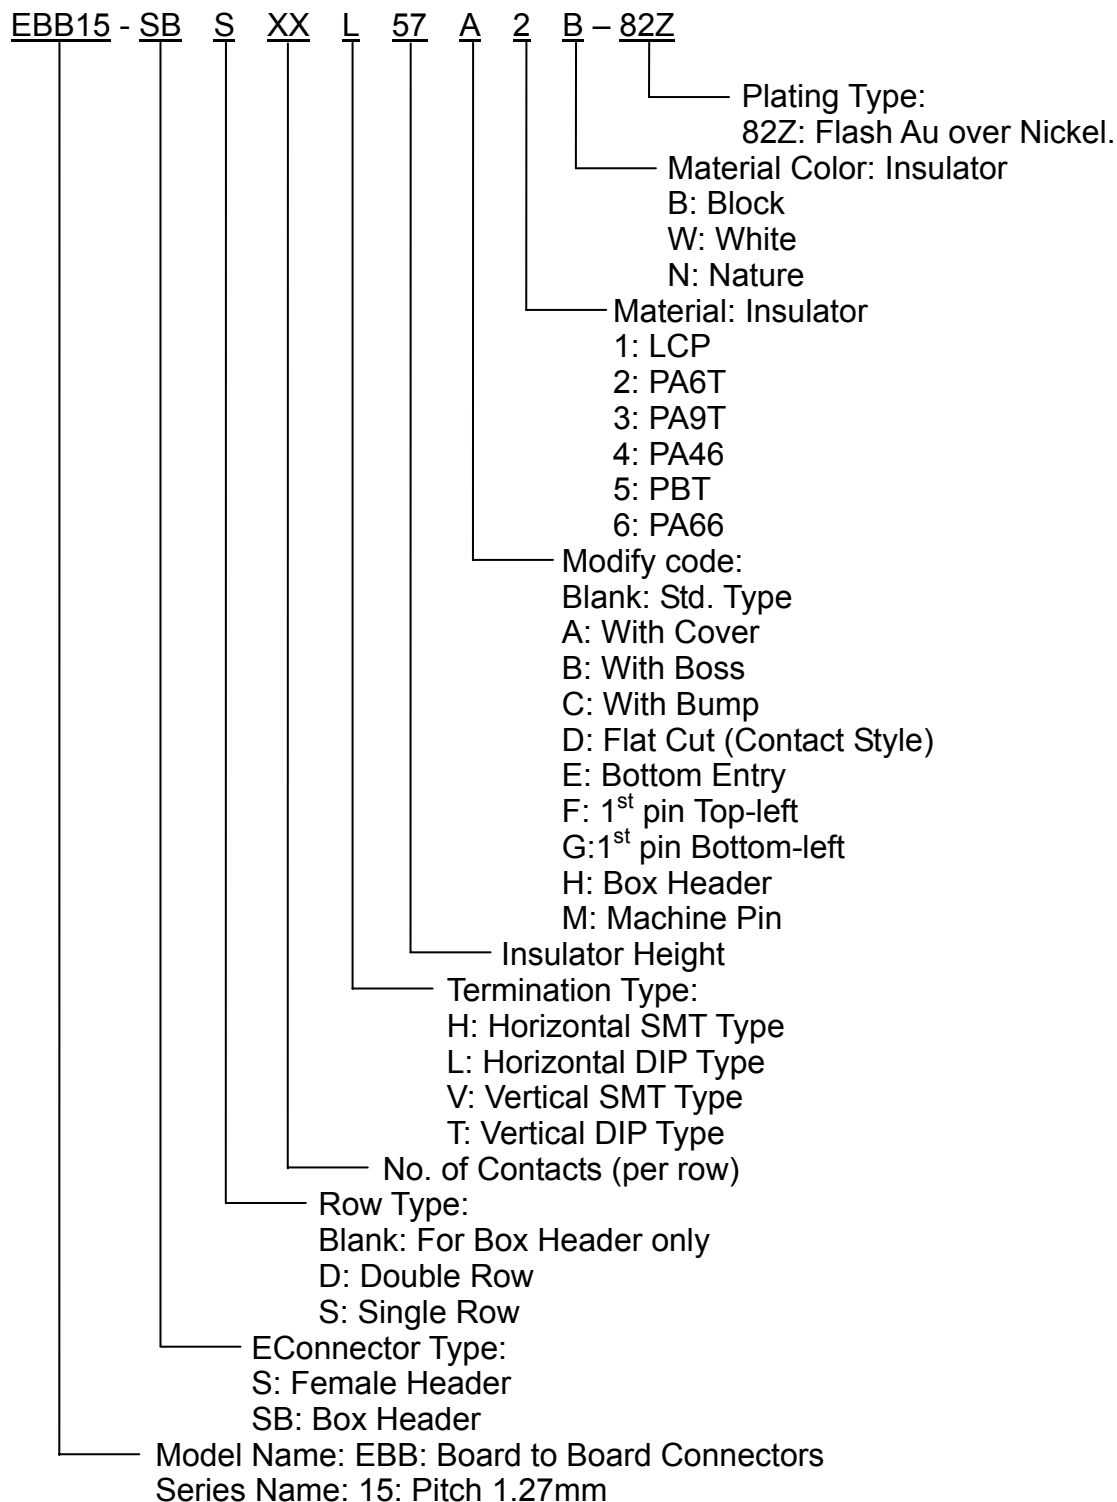






■ DIMENSIONS UNIT:mm

DIMENSIONS UNIT:mm
EBB15-SBxxL_Box Header

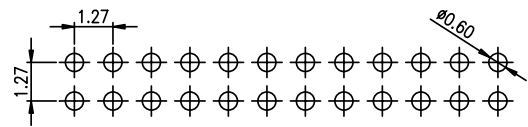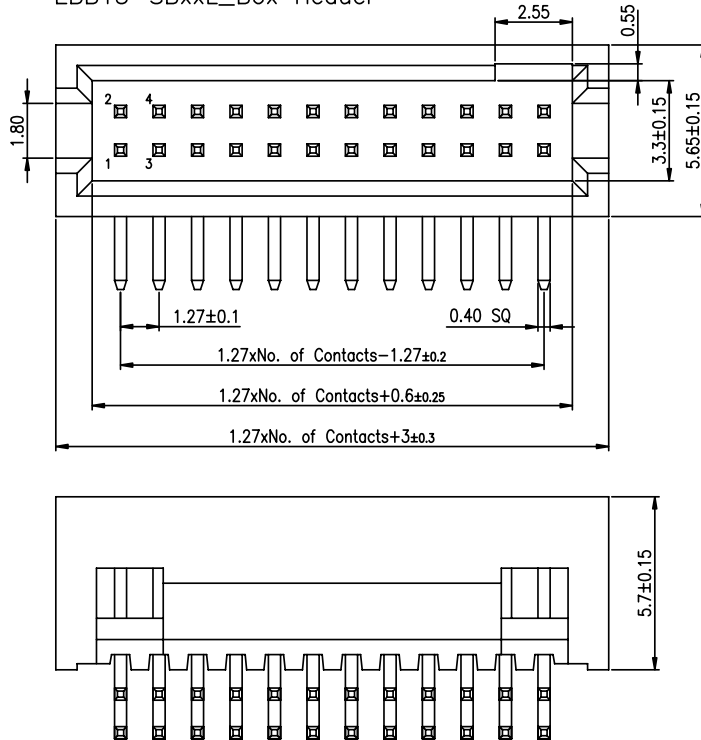



DIMENSIONS UNIT:mm
EBB15-SDxxL

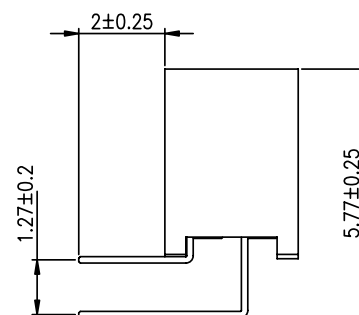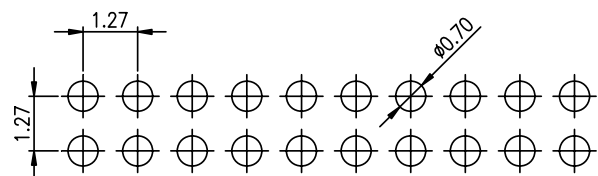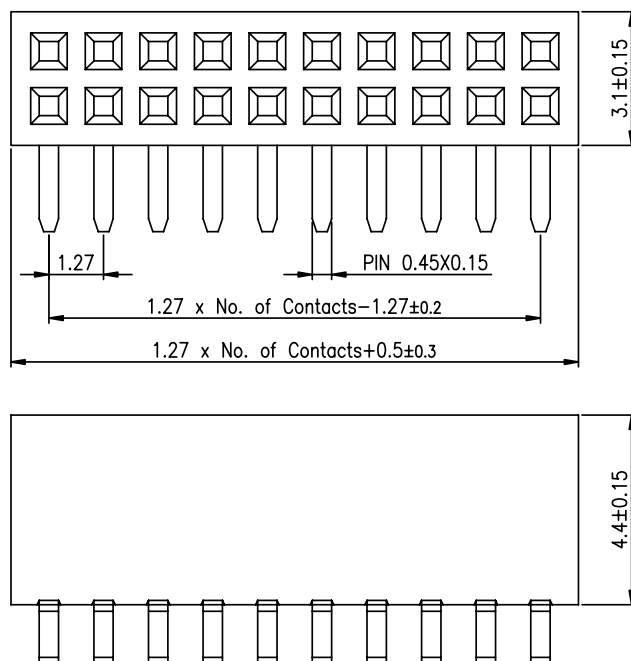



DIMENSIONS UNIT:mm

EBB15-SDxxV

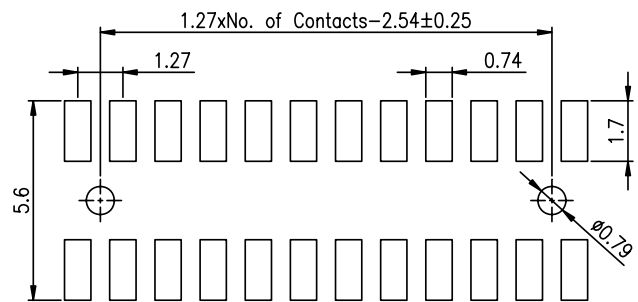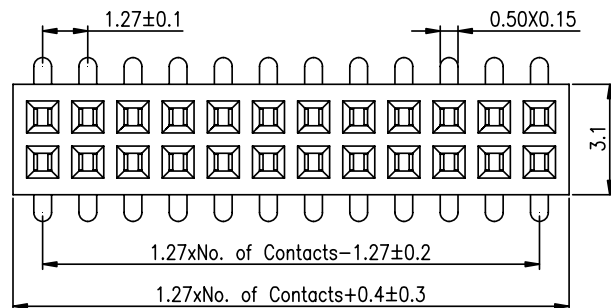Recommended PCB Layout
(PCB TOLERANCE ± 0.05)