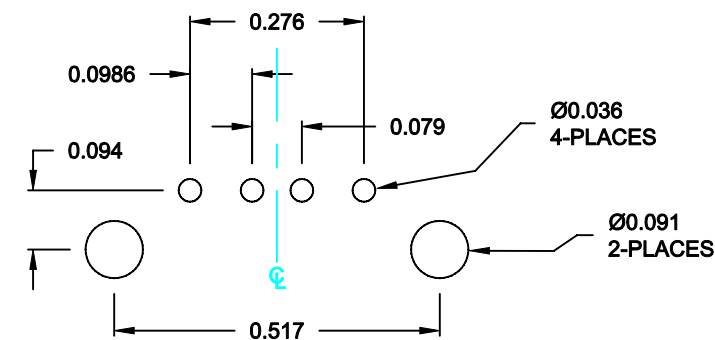
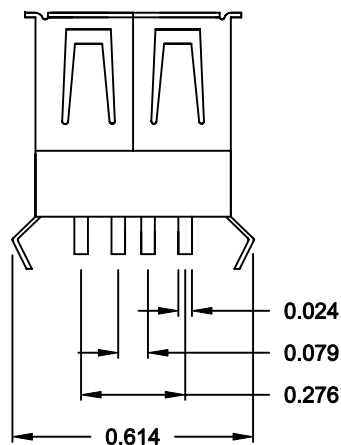
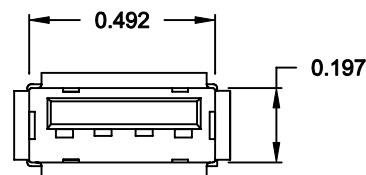
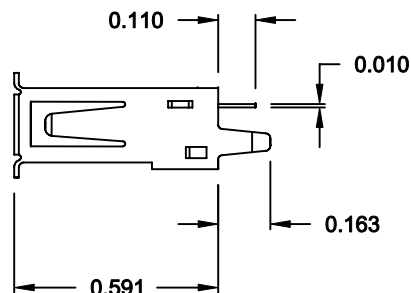


DESCRIPTION: USB Type "A" - VERTICAL MOUNT**RECOMMENDED PCB LAYOUT**

SCALE = 3 : 1

ELECTRICAL:

CONTACT CURRENT RATING: 1.0 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
 INSULATION RESISTANCE: 1,000 MegOhms Min.
 CONTACT RESISTANCE: 30 MilliOhms Max.
 OPERATING TEMPERATURE: -55°C TO +85°C

MECHANICAL:

MATING FORCE: 3.5 Kg Max.
 UNMATING FORCE: 1.0 Kg Min.

MATERIALS:

CONTACTS: COPPER ALLOY
 INSULATOR: THERMOPLASTIC PA9T UL 94V-0
 SHELL: COPPER ALLOY

PLATING:

CONTACTS: 30u" GOLD (MATING AREA)
 TIN (LEAD FREE) SOLDER TAILS
 SHELL: NICKEL PLATED
 USB VERSION: 2.0

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 7-28-05	
		CHECKED:		DATE:	
NorComp		SCALE:	SHEET 1 OF 1		REV 2
		DWG NO. 055-004-121R010			

RoHS COMPLIANT