
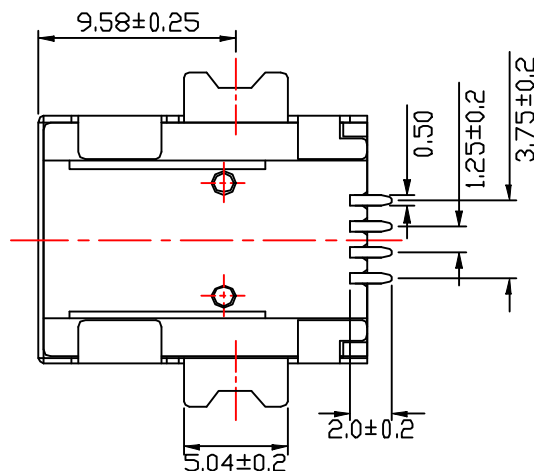
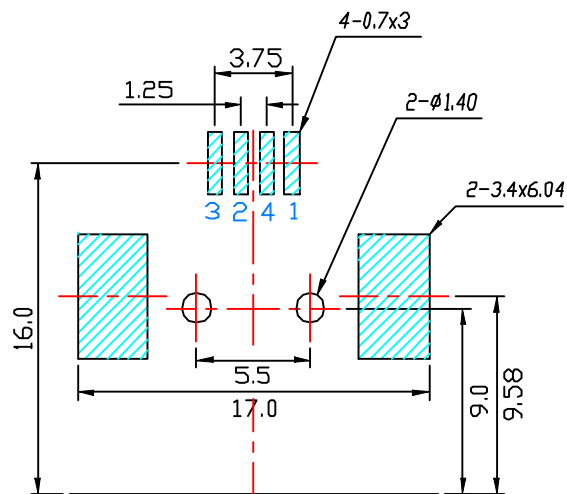
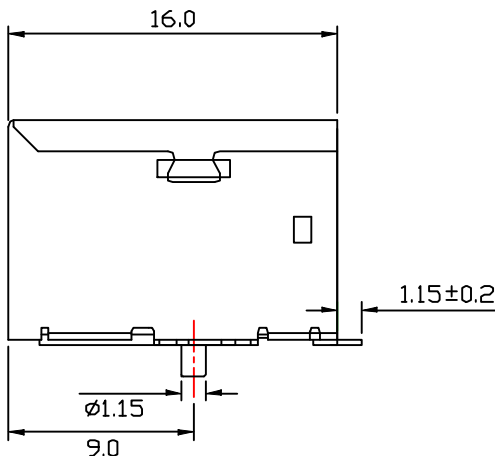


DESCRIPTION: USB Type "B" RIGHT ANGLE SURFACE MOUNT

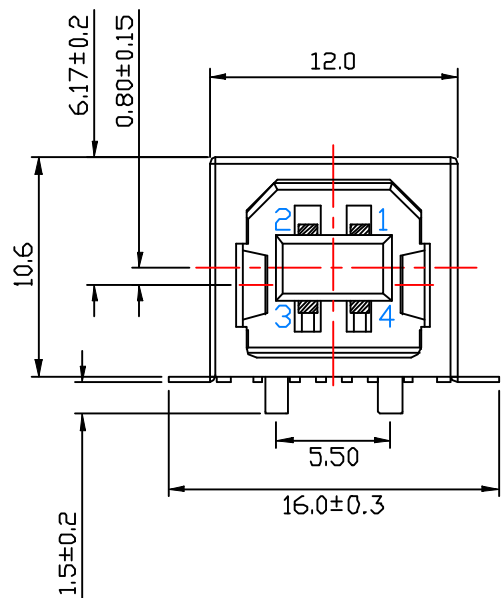

ELECTRICAL:

CONTACT CURRENT RATING: 1.5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
INSULATION RESISTANCE: 1,000 MegOhms Min.
CONTACT RESISTANCE: 30 MilliOhms Max.
OPERATING TEMPERATURE: -55°C TO +85°C

MECHANICAL:

MATING FORCE: 3.5 Kg Max.
UNMATING FORCE: 1.0 Kg Min.
DURABILITY: 1500 CYCLES

MATERIALS:

CONTACTS: PHOSPHOR BRONZE
INSULATOR: NYLON PA9T UL 94V-0
SHELL: BRASS

PLATING:

CONTACTS: 30u" GOLD (MATING AREA)
TIN (LEAD FREE) SOLDER TAILS
SHELL: NICKEL PLATED
USB VERSION: 2.0

PCB EDGE

PCB LAYOUT
(COMPONENT SIDE)

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
9-15-05

CHECKED:

DATE:

SCALE:

SHEET

OF

1

1

REV

3

DWG NO.

062-004-121R010

RoHS COMPLIANT

NorComp