
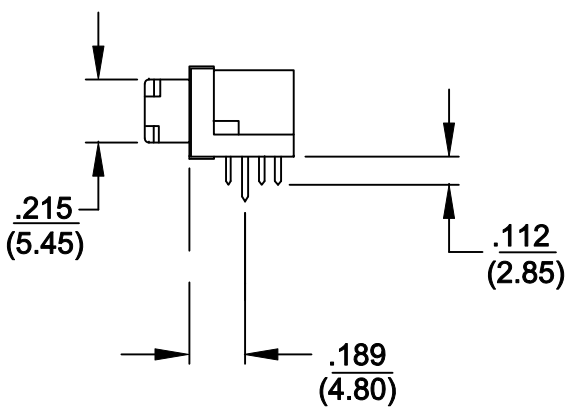
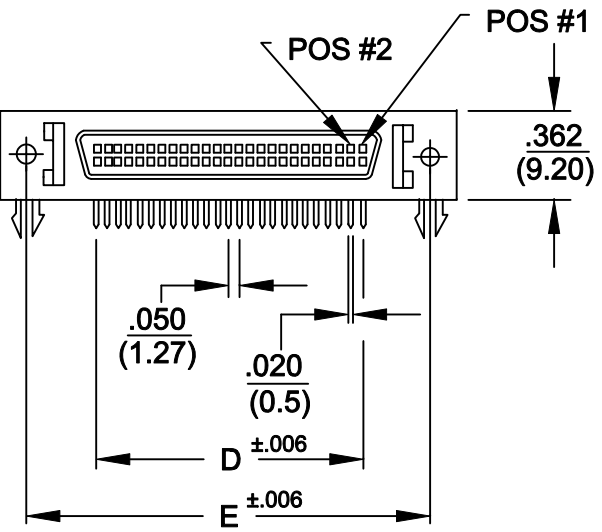


DESCRIPTION: Scsi 2/3 Female Right Angle

	A	B	C	D	E
50	1.366 34.70	1.665 42.3	2.063 52.4	1.200 30.48	1.830 46.48
68	1.816 46.13	2.020 51.32	2.514 63.86	1.650 41.91	2.281 57.93

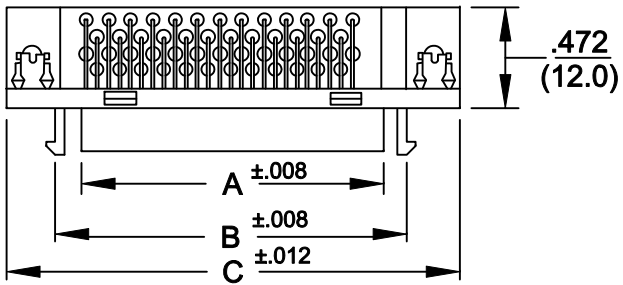

116-YYY-213LYY1

POSITIONS _____
 050
 068

GENDER _____
 2 = FEMALE

TERMINATION _____
 1 = DIP SOLDER

SHELL PLATING _____
 3 = NICKEL

HARDWARE OPTIONS _____
 83 = LATCH LOCKS(2-56)/BOARD LOCKS
 86 = LATCH LOCKS(4-40)/BOARD LOCKS

PLATING OPTIONS _____
 01 = GOLD FLASH
 02 = 30 MICRO-INCH GOLD
 05 = 15 MICRO-INCH GOLD


Materials:
 Insulator: PBT, Black, UL 94V-O,
 230°C process temp.
 Contacts: Phosphor Bronze
 Shell: Steel with nickel plating
 Bracket: Steel with nickel plating
 Boardlock: Brass with tin plating

Electricals:
 Contact current rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500 VAC r.m.s.
 Insulation Resistance: 500 megOhms Min.
 Contact Resistance: 35 milliOhms Max.
 Operating Temperature: -55°C to + 85°C


RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 12-05-05
			CHECKED: X	DATE: X
<h1>NorComp</h1>		SCALE: 1 : 1	SHEET 1	OF 2
		DWG NO. 116-YYY-213LYY1		

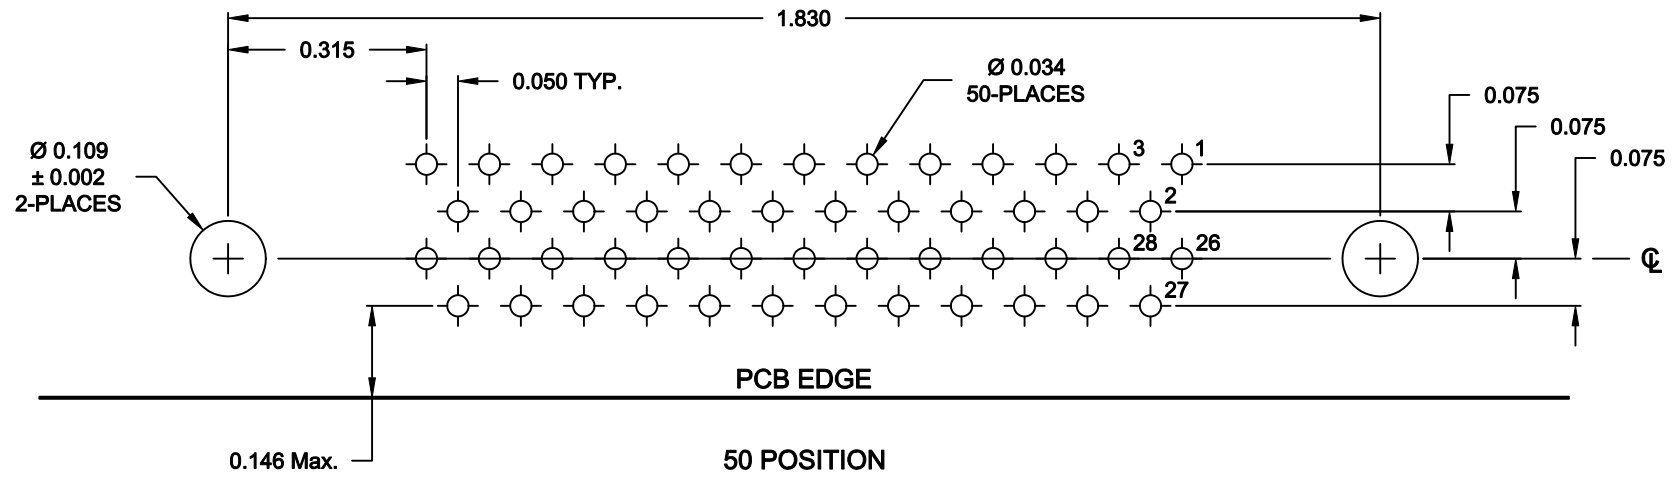


50 POSITION

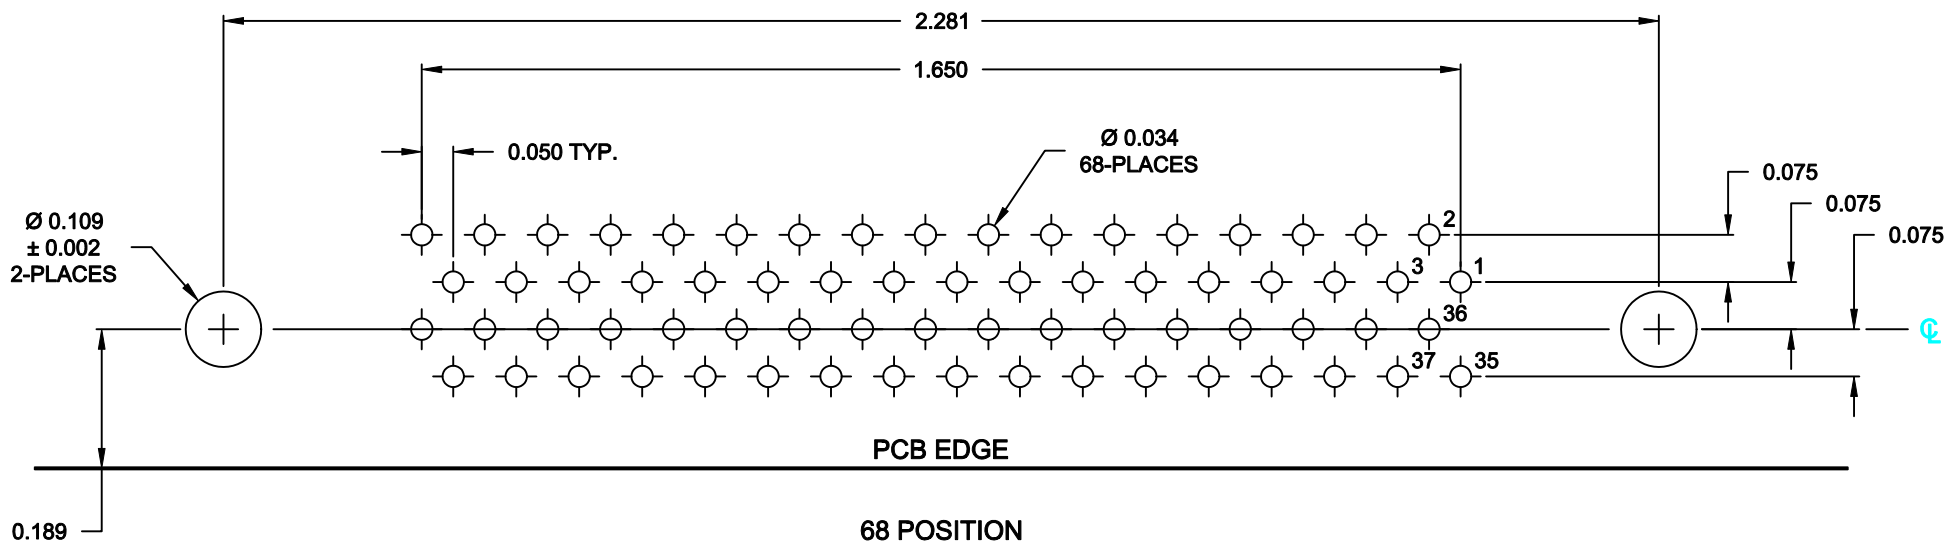

68 POSITION

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 03-09-07
			CHECKED: X	DATE: X
<h1>NorComp</h1>		SCALE: 3 : 1	SHEET 2 OF 2	REV 3
		DWG NO. 116-YYY-213LYY1		

RoHS COMPLIANT