



DESCRIPTION: M8 MALE - CABLE MOUNT - SOLDER CUP - 6 POS.

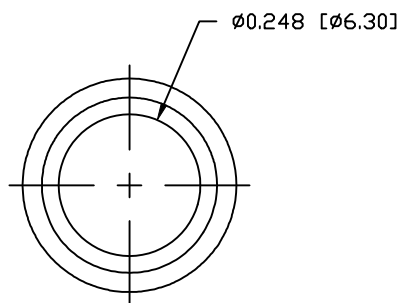

NUT

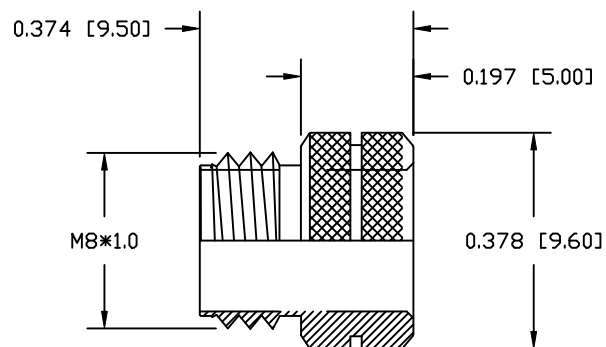

NOTE:

MATERIAL

HOUSING:

PBT UL94V-0, BLACK

CONTACT:

BRASS

NUT:

BRASS

SHELL:

BRASS

FINISH

CONTACT:

GOLD PLATED

OVER 50µ" NICKEL

SHELL:

NICKEL PLATED

NUT:

NICKEL PLATED

ELECTRICAL

RATED CURRENT:

3A

RATED VOLTAGE:

125V

WATER PROOF:


IP67

ENVIRONMENT



OPERATION TEMPERATURE: -40°C TO +85°C

854A006-103RLSY

1 = GOLD FLASH  
4 = 10µ" GOLD

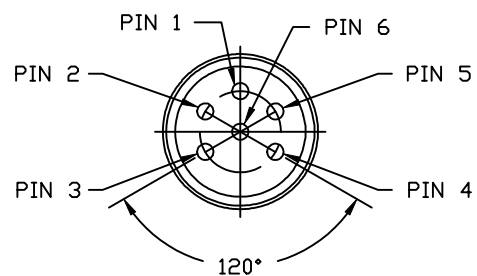

Ø0.276 [7.00]

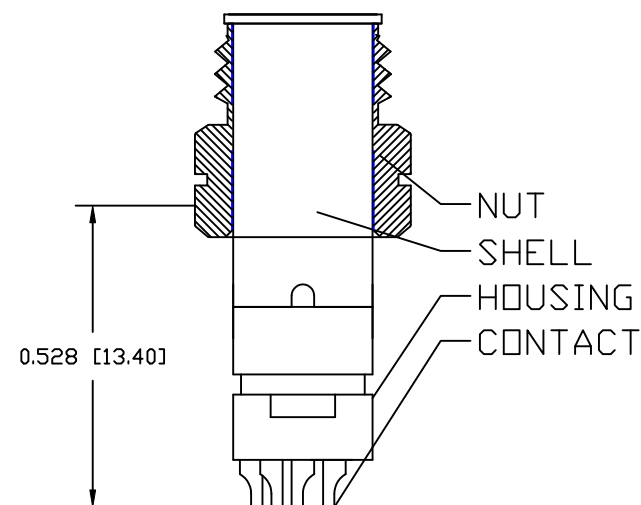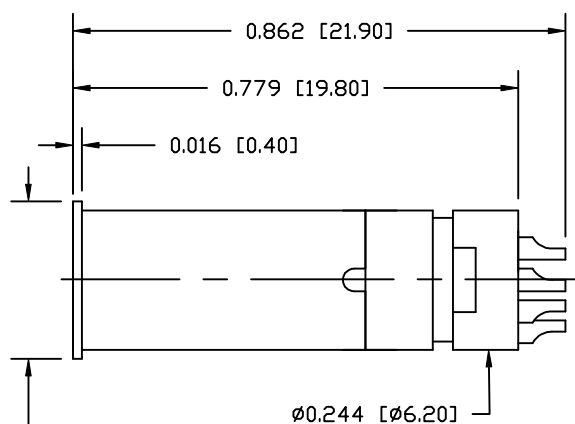

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

03-04-16

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

OF

1

1

REV

0

DWG NO.

854A006-103RLSY