



DESCRIPTION: 970 SERIES D-SUB BACKSHELL

**BACKSHELL KIT INCLUDES:**


- (2) BACKSHELL HALVES
- (2) 4-40 THUMBSCREWS
- (2) HOUSING SCREWS / NUTS
- (1) SET OF COMPRESSION INSERTS-VARIOUS SIZES  
 $\varnothing 0.157$  [4.0],  $\varnothing 0.197$  [5.0],  $\varnothing 0.276$  [7.0],  $\varnothing 0.354$  [9.0]

**\*\*NOTE: 3.0 IN/LBS IS RECOMMENDED TORQUE VALUE FOR HOUSING SCREWS/NUTS\*\***


PLASTIC: ABS VH-0800 - NICKEL PLATED - UL94-HB  
 JACKSCREWS: STEEL  
 M3 HOODSCREWS: STEEL  
 COMPRESSION INSERT: ABS UL 94-HB  
 M3 NUT: STEEL  
 OPERATING TEMP: - 30°C TO + 90°C

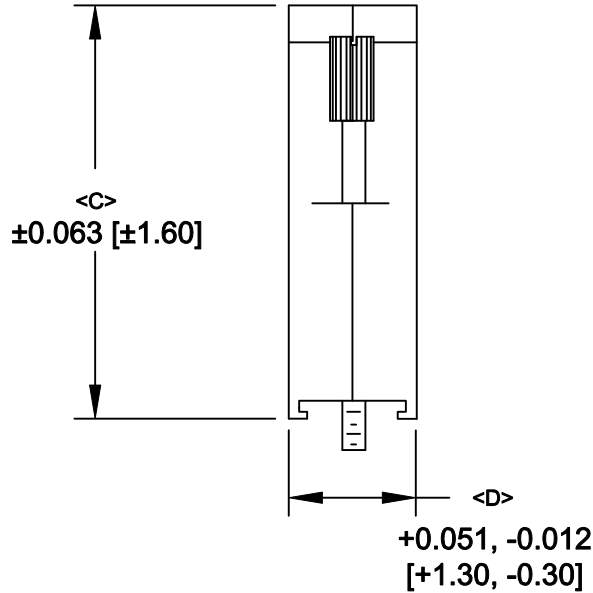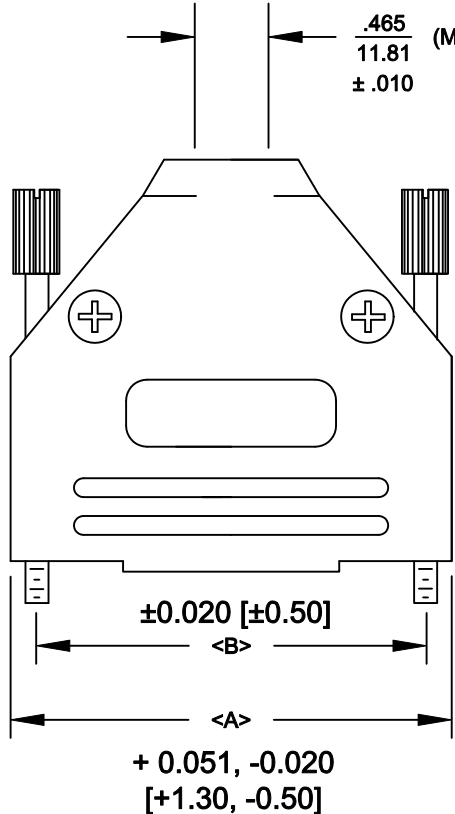

POS.	A	B	C	D
9	1.228 31.19	.984 24.99	1.571 39.90	.590 14.99
15	1.555 39.50	1.312 33.32	1.534 38.96	.590 14.99
25	2.102 53.39	1.852 47.04	1.913 48.59	.590 14.99
37	2.744 69.70	2.500 63.50	2.110 53.59	.590 14.99

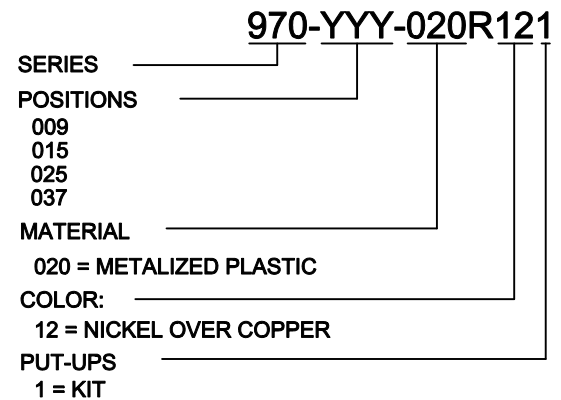

**RoHS COMPLIANT**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>PAM JENKINS</b>	DATE: <b>6-9-05</b>
			CHECKED:	DATE:
<b>NorComp</b>		SCALE	SHEET 1 OF 1	REV 13
		DWG NO. <b>970-YYY-020R121</b>		