


2032 Series

FFC/FPC Connector 2.54mm(0.100") Non ZIF Type

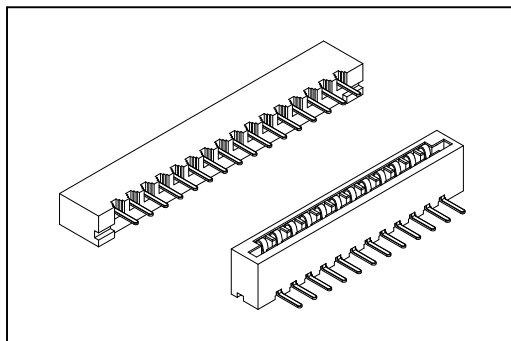

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 3 A.

Dielectric Withstanding Voltage: AC 1000V.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -25°C~+85°C.

Features:

- * Size 2 through 36 available.
- * Straight & Right Angle, Non-ZIF.
- * For 0.3mm(0.0118") thick FFC/FPC, membrane switches.

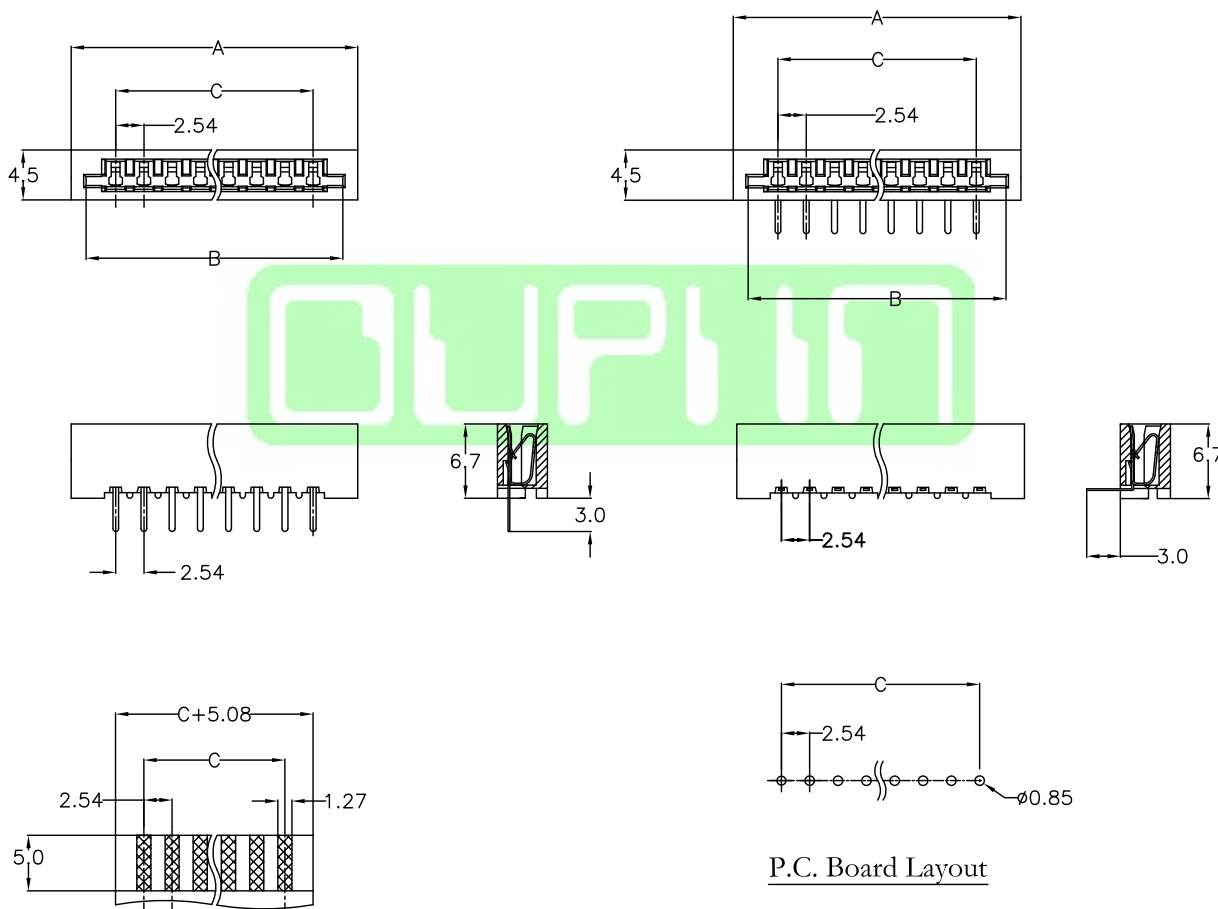

FFC/FPC Dimension
Thickness $0.3 \pm 0.05\text{mm}$

Position	
Dimension	2 Thru 26
A	(No. of Positions X 2.54)+5.48
B	(No. of Positions X 2.54)+3.35
C	(No. of Positions - 1) X 2.54

Ordering information

2032-
Series

26
No. of
Pin Count

T
T: Tin Plated

S
S: Straight
R: Right Angle

U
U: Tube Package