


2434 Series

FFC/FPC Connector 1.0mm(0.039") SMD ZIF Type

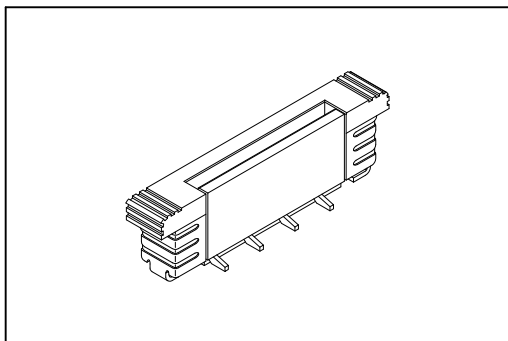

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Solder Pad: Copper Alloy.

Electrical Characteristics:

Current Rating: 0.5 A.

Dielectric Withstanding Voltage: AC 500V.


Insulator Resistance: 500MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+85°C.

Features:

- * ZIF, Surface Mount.Vertical.
- * Size 4 through 24 available.
- * For 0.30mm(0.0118") thick FFC/FPC.

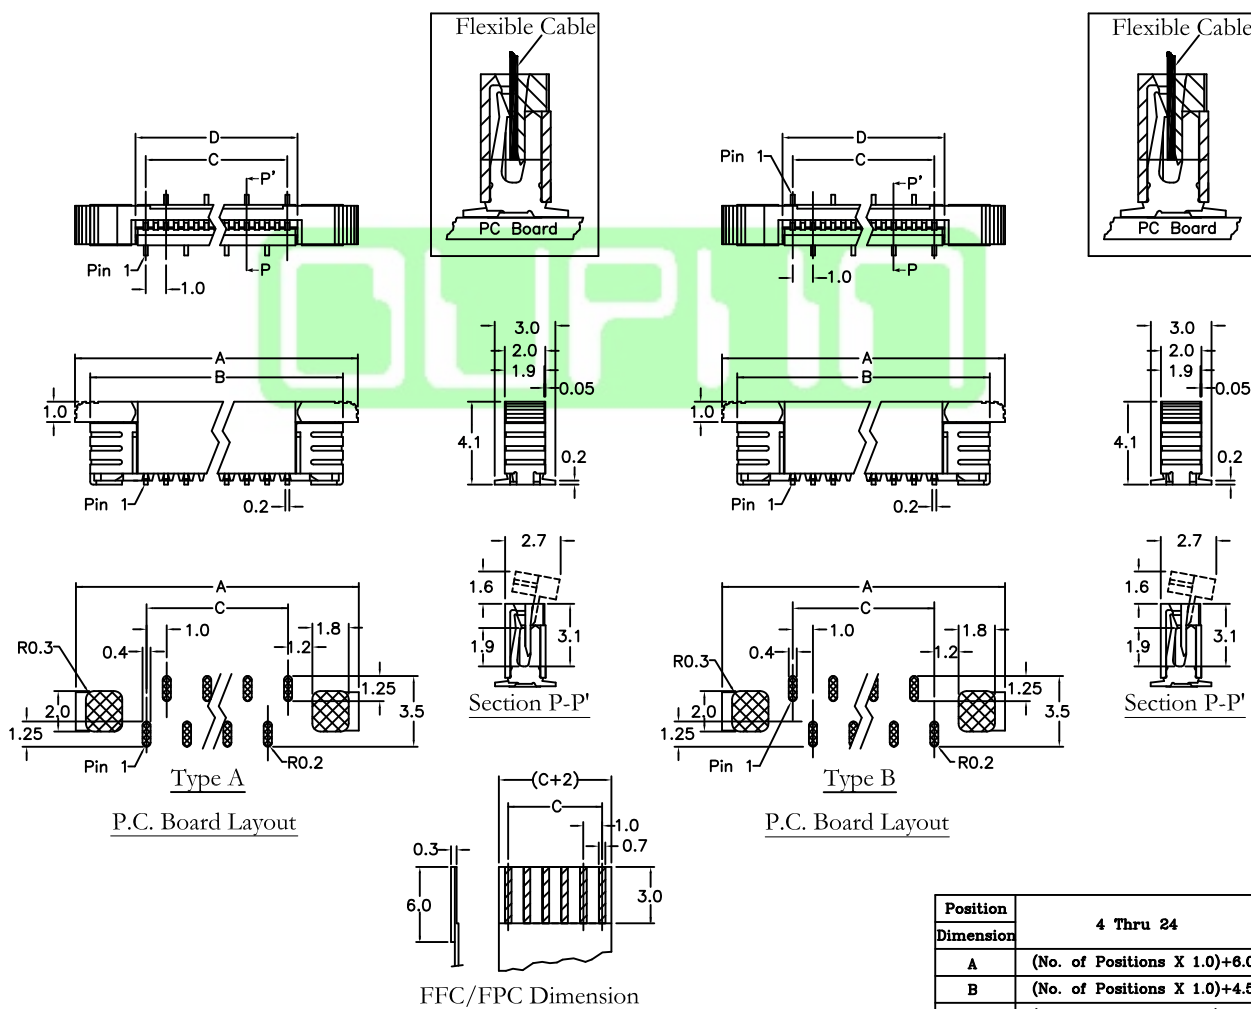

Position	4 Thru 24
Dimension	
A	(No. of Positions X 1.0)+6.0
B	(No. of Positions X 1.0)+4.5
C	(No. of Positions X 1.0)-1.0
D	(No. of Positions X 1.0)+1.1

Ordering Information

2434-	24	T	D	3	A	T	- M
Series	No. of Pin Count	T: Tin Plated	D: SMD Type	3: Vertical Type	A: Type A B: Type B	U: Tube Package T: Tape & Reel Package	Blank: Without Pad M: Metal Pad