


2537-A Series

FFC/FPC Connector 0.5mm(0.02") Flip Lock Type

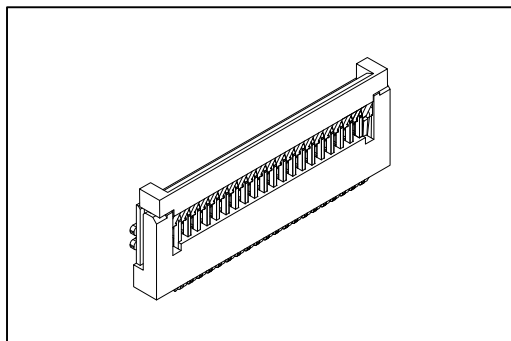

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Solder Pad: Copper Alloy.

Electrical Characteristics:

Current Rating: 0.5 A.

Dielectric Withstanding Voltage: AC 200V.


Insulator Resistance: 500MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -25°C~+85°C.

Features:

- * ZIF, Surface Mount.
- * Size 4 through 60 available.
- * For 0.3mm(0.0118") thick FFC/FPC.

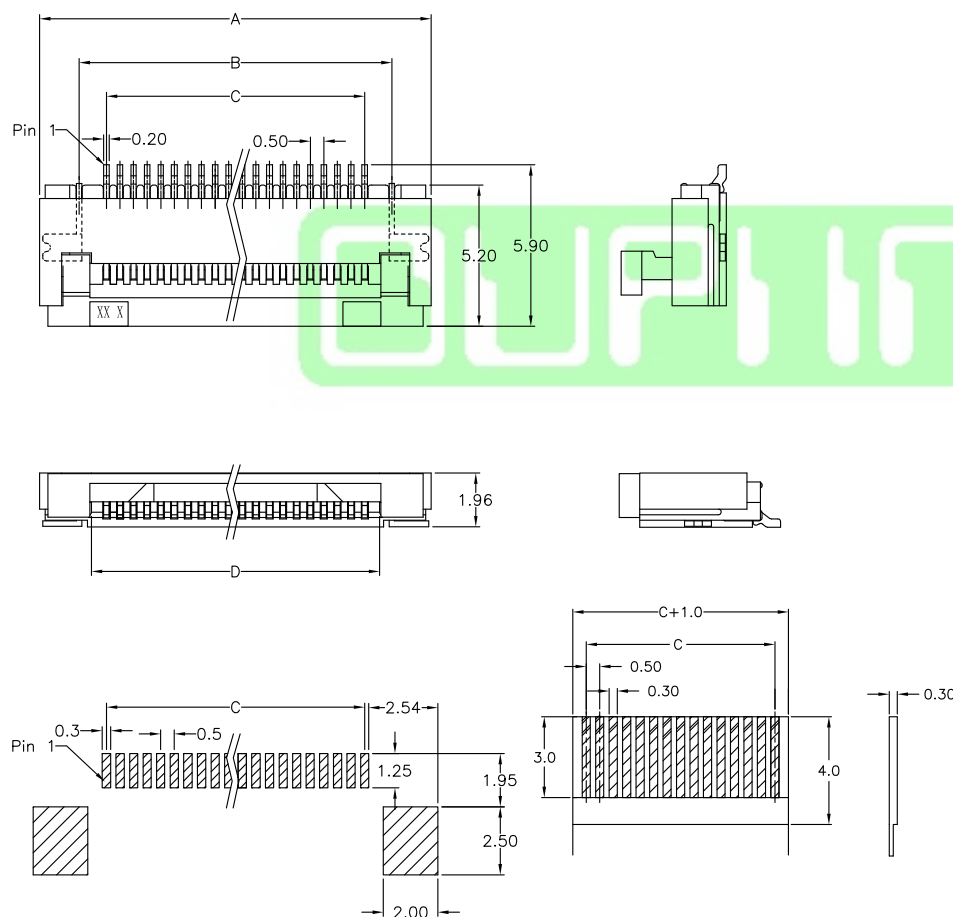

P.C.Board Layout

"*" Available Position				
Position	Dimension			
	A	B	C	D
* 4	6.40	3.50	1.50	2.60
* 5	6.90	4.00	2.00	3.10
* 6	7.40	4.50	2.50	3.60
* 7	7.90	5.00	3.00	4.10
* 8	8.40	5.50	3.50	4.60
* 9	8.90	6.00	4.00	5.10
* 10	9.40	6.50	4.50	5.60
* 11	9.90	7.00	5.00	6.10
* 12	10.40	7.50	5.50	6.60
* 13	10.90	8.00	6.00	7.10
* 14	11.40	8.50	6.50	7.60
* 15	11.90	9.00	7.00	8.10
* 16	12.40	9.50	7.50	8.60
* 17	12.90	10.00	8.00	9.10
* 18	13.40	10.50	8.50	9.60
* 19	13.90	11.00	9.00	10.10
* 20	14.40	11.50	9.50	10.60
* 21	14.90	12.00	10.00	11.10
* 22	15.40	12.50	10.50	11.60
* 23	15.90	13.00	11.00	12.10
* 24	16.40	13.50	11.50	12.60
* 25	16.90	14.00	12.00	13.10
* 26	17.40	14.50	12.50	13.60
* 27	17.90	15.00	13.00	14.10
* 28	18.40	15.50	13.50	14.60
* 29	18.90	16.00	14.00	15.10
* 30	19.40	16.50	14.50	15.60
* 31	19.90	17.00	15.00	16.10
* 32	20.40	17.50	15.50	16.60
* 33	20.90	18.00	16.00	17.10
* 34	21.40	18.50	16.50	17.60
* 35	21.90	19.00	17.00	18.10
* 36	22.40	19.50	17.50	18.60
* 37	22.90	20.00	18.00	19.10
* 38	23.40	20.50	18.50	19.60
* 39	23.90	21.00	19.00	20.10
* 40	24.40	21.50	19.50	20.60
* 41	24.90	22.00	20.00	21.10
* 42	25.40	22.50	20.50	21.60
* 43	25.90	23.00	21.00	22.10
* 44	26.40	23.50	21.50	22.60
* 45	26.90	24.00	22.00	23.10
* 46	27.40	24.50	22.50	23.60
* 47	27.90	25.00	23.00	24.10
* 48	28.40	25.50	23.50	24.60
* 49	28.90	26.00	24.00	25.10
* 50	29.40	26.50	24.50	25.60
* 51	29.90	27.00	25.00	26.10
* 52	30.40	27.50	25.50	26.60
* 53	30.90	28.00	26.00	27.10
* 54	31.40	28.50	26.50	27.60
* 55	31.90	29.00	27.00	28.10
* 56	32.40	29.50	27.50	28.60
* 57	32.90	30.00	28.00	29.10
* 58	33.40	30.50	28.50	29.60
* 59	33.90	31.00	29.00	30.10
* 60	34.40	31.50	29.50	30.60
* 64	36.40	33.50	31.50	32.60

Ordering information

2537-A
Series

60
No. of
Pin Count

T
T: Tin Plated

D
D: SMD Type

B
B: 0.3mm Thickness
FFC/FPC

T
T: Tape & Reel
Package
U: Tube Package