


7901 Series

D-SUB I.D.C. Type

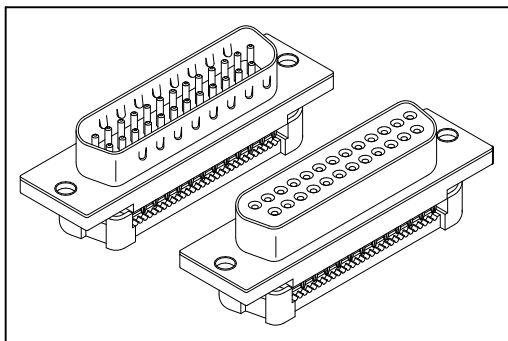

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.


Operating Temperature: -55°C~+105°C.

Features:

* Recommended 1.27mm flat cable.

* Easy to assembly.

Mates with: 7905, 7906, 7926.

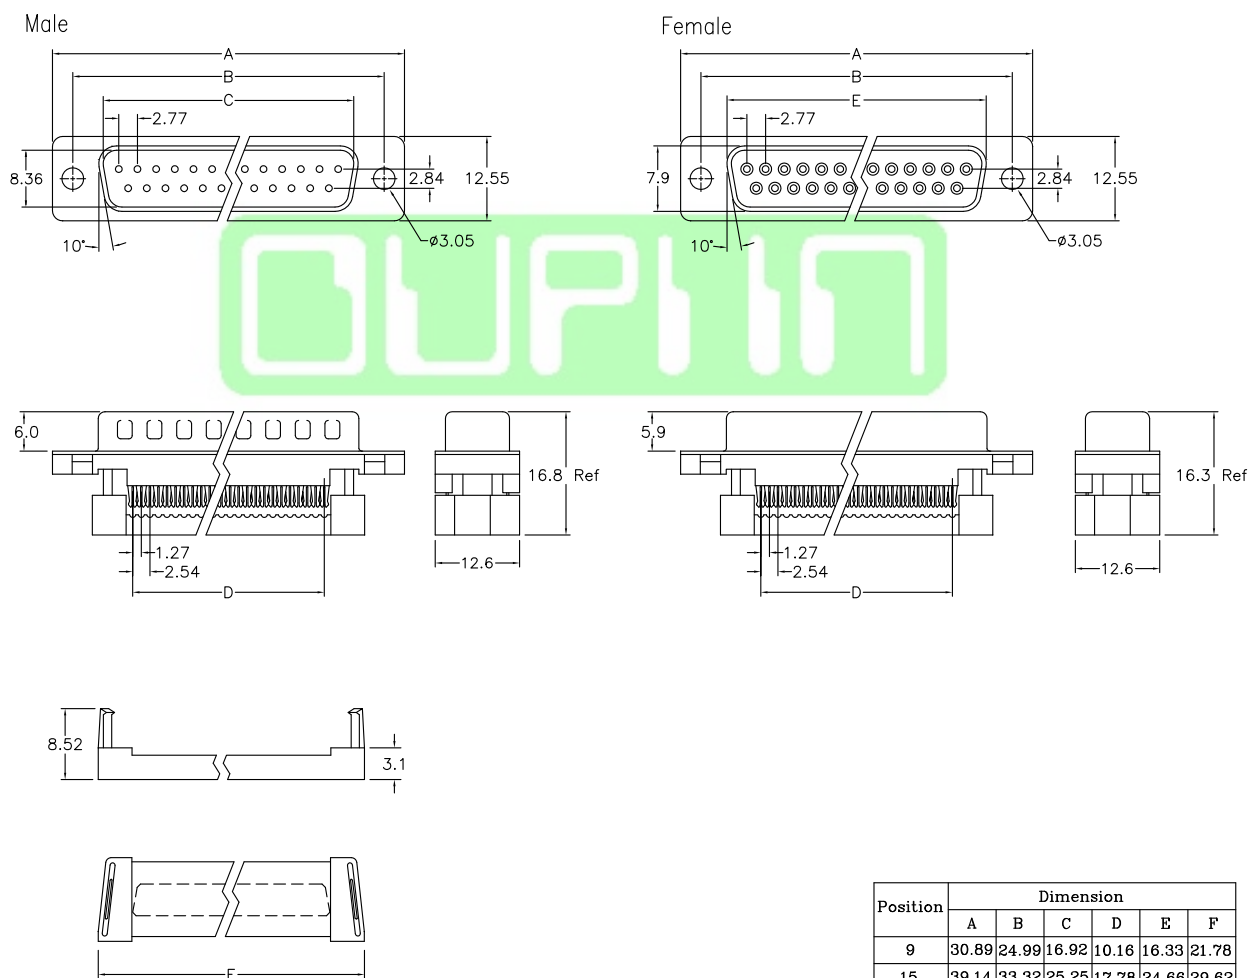

Position	Dimension					
	A	B	C	D	E	F
9	30.89	24.99	16.92	10.16	16.33	21.78
15	39.14	33.32	25.25	17.78	24.66	29.62
25	53.09	47.04	38.96	30.48	38.38	43.35
37	69.39	63.50	55.45	45.72	54.84	59.92

Ordering information

<u>7901</u> -	<u>37</u>	<u>M</u>	<u>M</u>	<u>O</u>	<u>U</u>	<u>C</u>	<u>00</u>	<u>A</u>
Series	Position	M: Male F: Female	M: Metal Shell * P: Plastic	N: With 4-40 Thread Insert O: Without 4-40 Thread Insert	U: Blue ** B: Black	C: Selective Gold Plated	00: G/F	A: Tray Package

* Standard metal shell and maybe subject to min. quantity request for full plastic.

** Standard color blue and maybe subject to min. quantity request for color black

Information including designs, specifications and components may be changed or updated without notice.

A144