

| | | | |
|------|---------------|---------|-------|
| REV. | SPECIFICATION | ECN NO. | APPD. |
| | | | |

Material:

Housing: High Temperature Housing(UL94V-0)

Contacts: Copper Alloy.

Specification:




Current Rating: 1 AMP.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

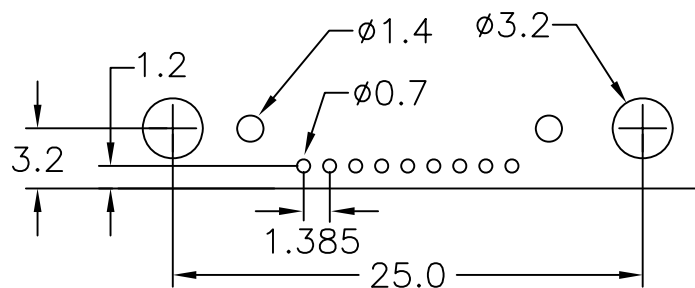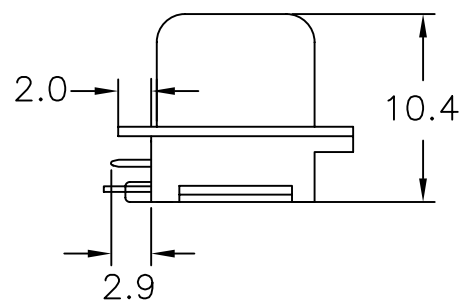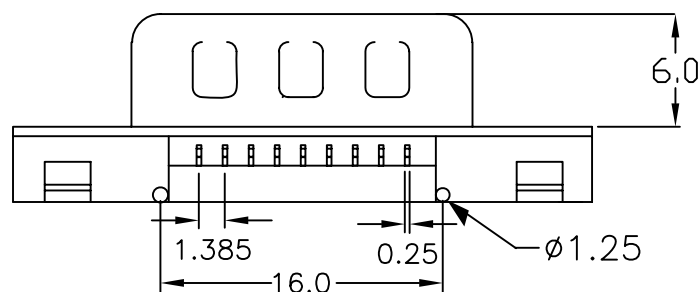

P.C. Board Layout

7902-A 09 M C 00 R 3 A
 Series Position M: Male C: Selective Gold Plated 00: G/F R: Right Angle Type A: Tray Package

| | | | |
|-------------------|-------------------|----------------|-------|
| Tolerances | Drawn No. | 7902D01007 | |
| x = ±0.5 | Projection | ⊕ ⊖ | |
| .x = ±0.25 | Unit | mm | SCALE |
| .xx = ±0.15 | Drawn By | Peggy 03/31'11 | |

Title:
 7902 Series
 SLIM D-SUB
 Right Angle Type
 0512

| | | | |
|-------------------------------------|-----|----------------|----|
| OUPIN | | | |
| OUPIN ELECTRONIC(KUNSHAN) CO., LTD. | | | |
| P/N: 7902-A09MC00R3A | | | |
| SHEET | 1/1 | Ver.No. | A7 |