

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: High Temperature Plastic Glass Filled UL94V-0.

Contacts: Copper Alloy.

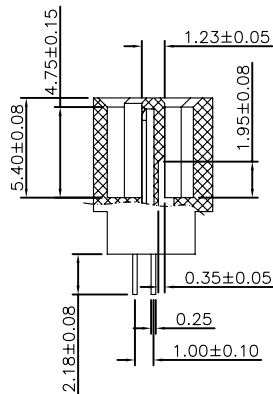
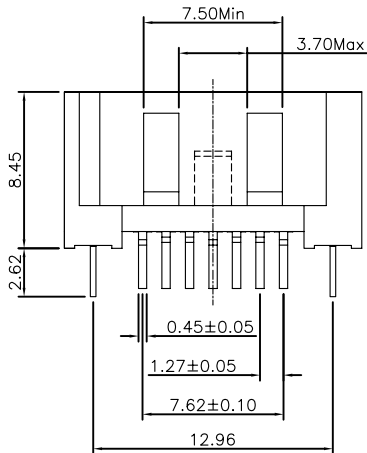

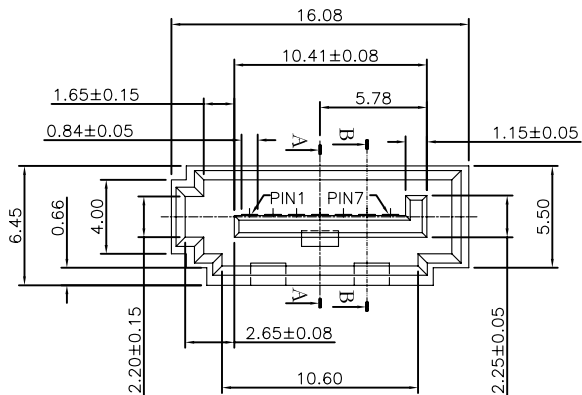
Electrical Characteristics:

Current Rating: 1.5 AMP.


Dielectric Withstanding Voltage: 500 V AC.

Insulator Resistance: 1000M Ω min.Contact Resistance: 30m Ω max.


Operating Temperature: -55°C ~ +85°C .

***RoHS Compliant**

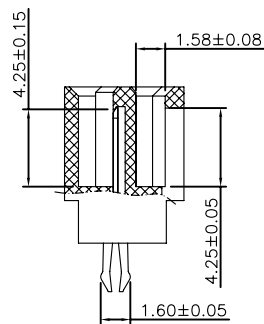SECTION A-A



SECTION B-B

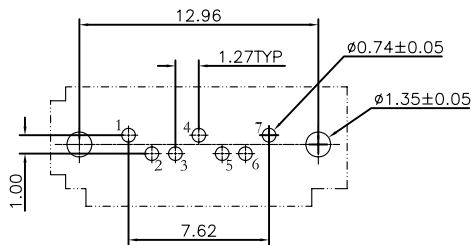

P.C.Board Layout

7904- 07 M C 15 S B U - 01
Series Position Male C:Selective 15:15u" S:Straight B:Black U:Tube
Gold Plated Package Internal Code

Pin	Signal Name
1	GND
2	A+
3	A-
4	GND
5	B-
6	B+
7	GND

Tolerances	Dwg. No.	7904D01008	Title:	OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7904-07MC15SBU-01			
x = ±0.5	Projection		7904 Series				
.x = ±0.25	Unit mm	Scale	Serial ATA 7P				
.xx = ±0.15	Drawn By	Xi MM07/19'13	DIP Type				
Ø 705				SHEET	1/1	Ver.No.	A1