
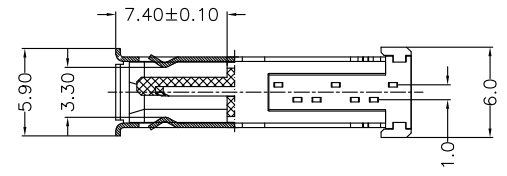
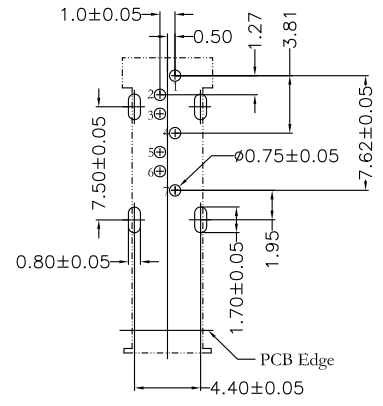
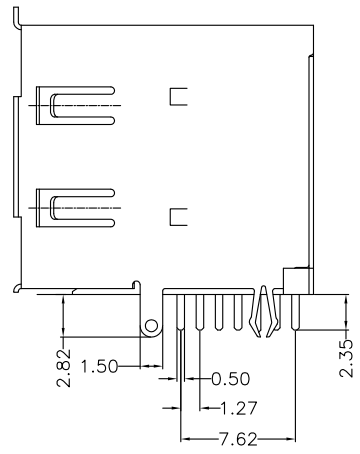
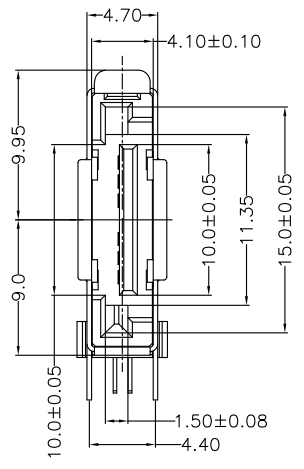


REV.	SPECIFICATION	ECN NO.	APPD.

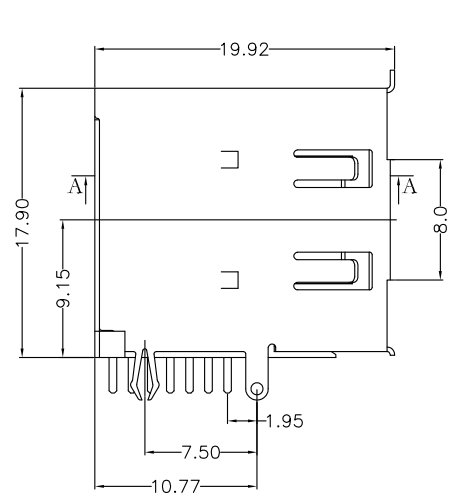

Section A-A

P.C.Board Layout

Material:
 Housing: High Temperature Plastic UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:
 Current Rating: 1.5 A.
 Dielectric Withstanding Voltage: 500V AC.
 Insulator Resistance: 1000 MΩ min.
 Contact Resistance: 30mΩ max.
 Operating Temperature: -55°C ~ +125°C.

***RoHS Compliant**

Signal Name	
Pin Number	eSATA
1	GND
2	RX+
3	RX-
4	GND
5	TX-
6	TX+
7	GND

7904-07 M C 15 UR B A - 04
 Series Position M:Male C: Selective 15:15// UR:Upright B:Black A: Tray Internal Code
 Gold Plated Type Package

Tolerances	Dwg. No.	7904D01002	Title:		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7904-07MC15URBA-04
x = ±0.5	Projection		7904 Series		
.x = ±0.38	Unit	mm	Scale	1:1	
.xx = ±0.25	Drawn By	Peggy04/06'12	①705		
SHEET		1/1	Ver.No.	A2	