
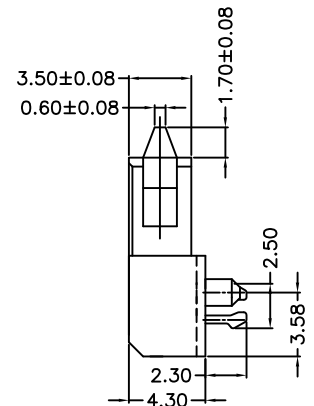
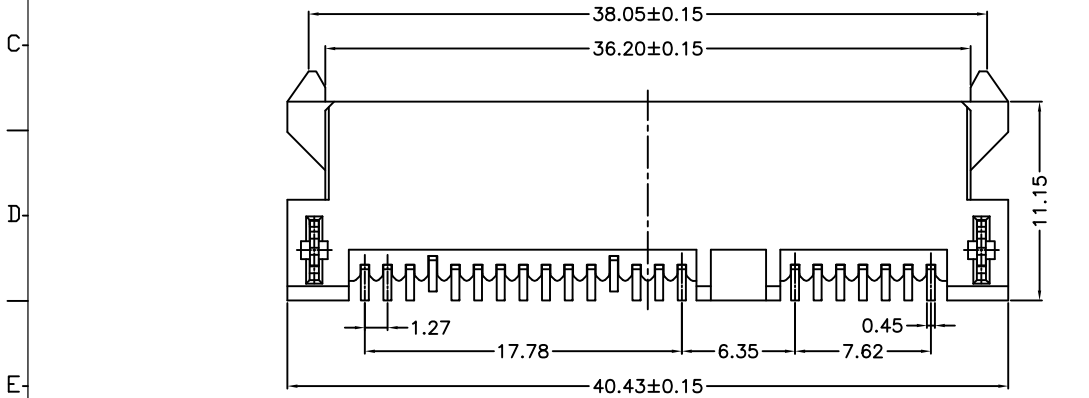


1 2 3 4 5 6 7 8 9 10 11 12

REV.	SPECIFICATION	ECN NO.	APPD.

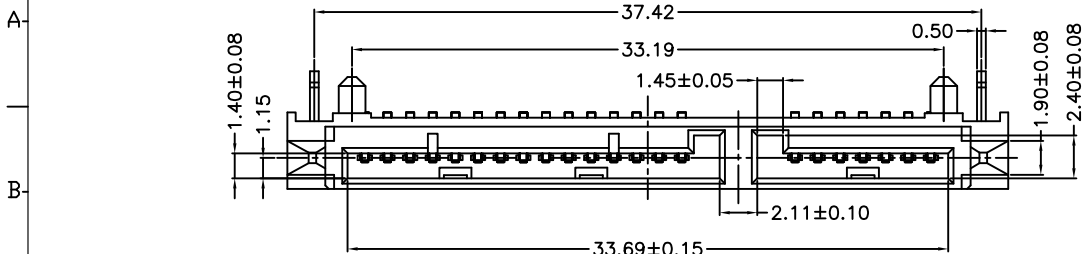

**Material:**


Housing: High Temperature Plastic UL94V-0.  
Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 1.5 AMP.  
Dielectric Withstanding Voltage: AC 500V For 1 minute.  
Insulator Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 30mΩ max. at DC 100mA.  
Operating Temperature: -55°C~+85°C.

**\*RoHS Compliant**

7904- 22 F C 15 D B 1 U  
 Series Position Female C: Selective Gold Plated 15: 15 μ" D: SMD Type B: Reverse Type 1: Housing U: Tube Package  
 Height 4.3mm

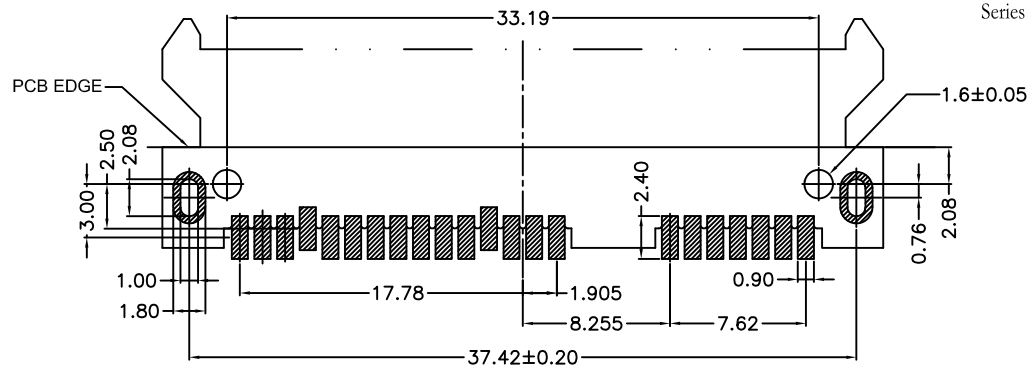

P.C.Board Layout

Tolerances	Drawn No.	7904D02001	
.x= ±0.38	Projection	⊕ ◁	
.xx= ±0.25	Unit	mm	SCALE
.xxx= ±0.20	Drawn By	Rikey 03/02'10	

Title: 7904 Series  
S ATA 7+15P R/A  
Female Reverse SMD Type  
①705

<b>OUPIN</b>			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7904-22FC15DB1U			
SHEET	1/1	Ver.No.	A4

1 2 3 4 5 6 7 8 9 10 11 12