


7905 Series

D-SUB Straight Press Fit Type

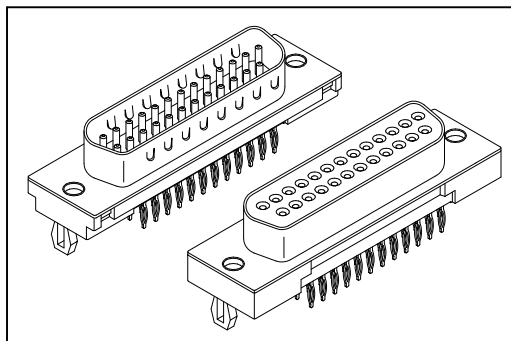

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 3A.

Dielectric Withstanding Voltage: AC 1000V.






Insulator Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+105°C.

Features:

- * Press Fit D-SUB, use for solderless environment
- * Available pin contact 9~37 both male and female.

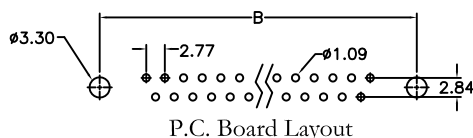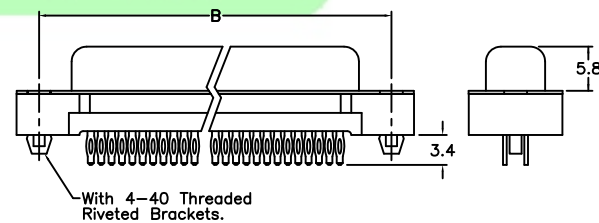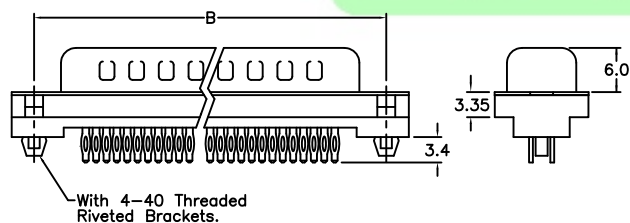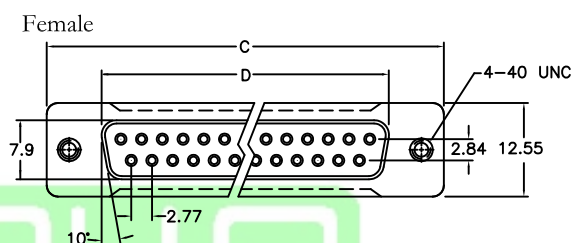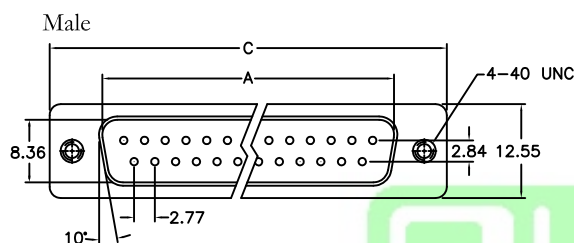

Position	Dimension			
	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84

Ordering information

<u>7905-</u>	<u>37</u>	<u>M</u>	<u>T</u>	<u>B</u>	<u>P</u>	<u>C</u>	<u>00</u>	<u>N3</u>	<u>A</u>
Series	Position	M: Male F: Female	T: Tin Shell	B: Black	P: Press Fit Type	C: Selective Gold Plated	00: G/F	N3: With 4-40 Threaded Riveted Brackets.	A: Tray Package

* 7905-37MTBPCN3N6: With #4-40 Threaded Riveted Brackets and Jack Screws Assembled.

Information including designs, specifications and components may be changed or updated without notice.

A146