


7907 Series

D-SUB Solder Cup Type

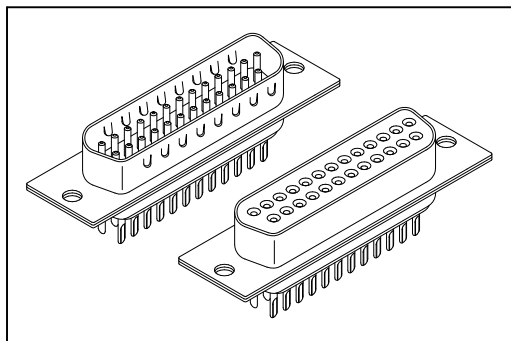

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.


Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+105°C.

Features:

* Additional plating options available.

Mates with: 7905, 7906, 7926, 7936.

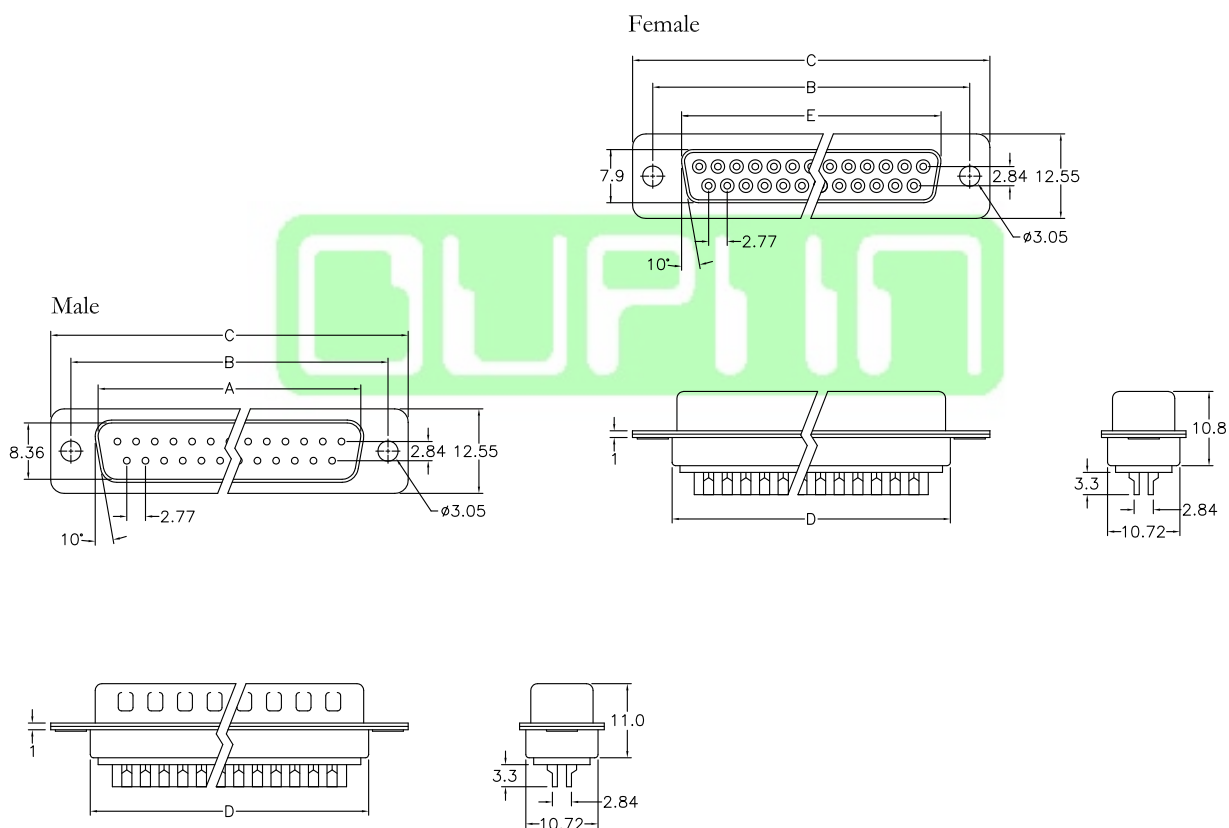

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84

Ordering information

7907-	37	M	T	B	C	00	N1	A
Series	Position	M: Male F: Female	T: Tin Shell	B: Black U: Blue W: White	C: Selective Gold Plated	00: G/F	Blank: Standard Type N1: See Page A160	A: Tray Package

* Please consult factory for details on 50 pin.

Information including designs, specifications and components may be changed or updated without notice.


A156

Mounting Option




Option N1

With NUTS #4-40 Threaded
Riveted On Face Side




Option N1N6

With NUTS #4-40 Threaded
Riveted On Face Side and
Jack Screws Assembled




Option N2

With NUTS #4-40 Threaded
Riveted On Rear Side




Option N2N6

With NUTS #4-40 Threaded
Riveted On Rear Side and
Jack Screws Assembled



Option N3

With #4-40 Threaded Riveted
Brackets (Board Locks)



Option N3N6

With #4-40 Threaded Riveted
Brackets and Jack Screws
Assembled

