
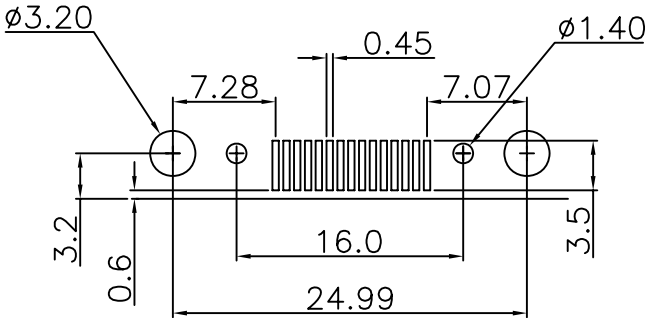

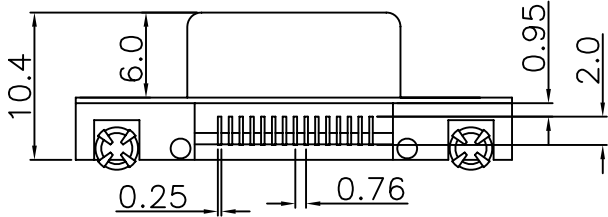


REV.	SPECIFICATION	ECN NO.	APPD.

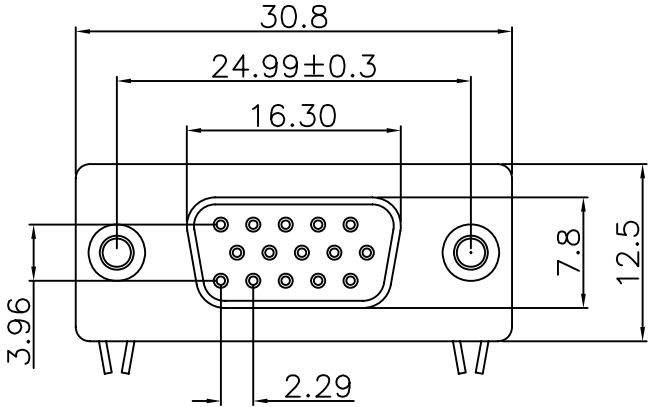

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Plating: Selective Gold Plated.

Electrical Characteristics:

Current Rating: 1 AMP.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -65°C~+125°C.

***RoHS Compliant**

7912-A 15 F C 00 D A
Series Position F: Female C: Selective Gold Plated 00:G/F D: SMD Type A: Tray Package

Tolerances	Dwg. No.	7912D02008		Title: 7912 Series D-SUB Connector Right Angle SMD Type Φ512	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ±0.5	Projection				P/N: 7912-A15FC00DA			
.x = ±0.30	Unit	mm	Scale		1:1	SHEET		
.xx = ±0.20	Drawn By	ZJJ 12/22'11			1/1	Ver.No.	A3	