


7917 Series

H.D. D-SUB Solder Cup Type

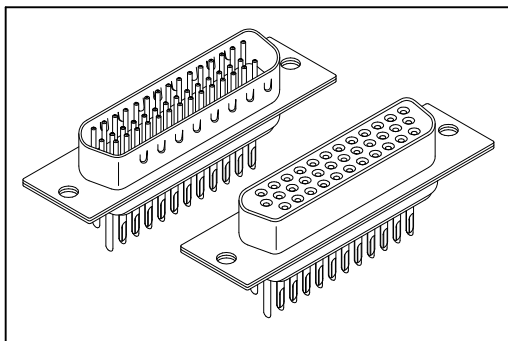

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.


Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+105°C.

Features:

* Additional plating options available.

Mates with: 7915, 7916.

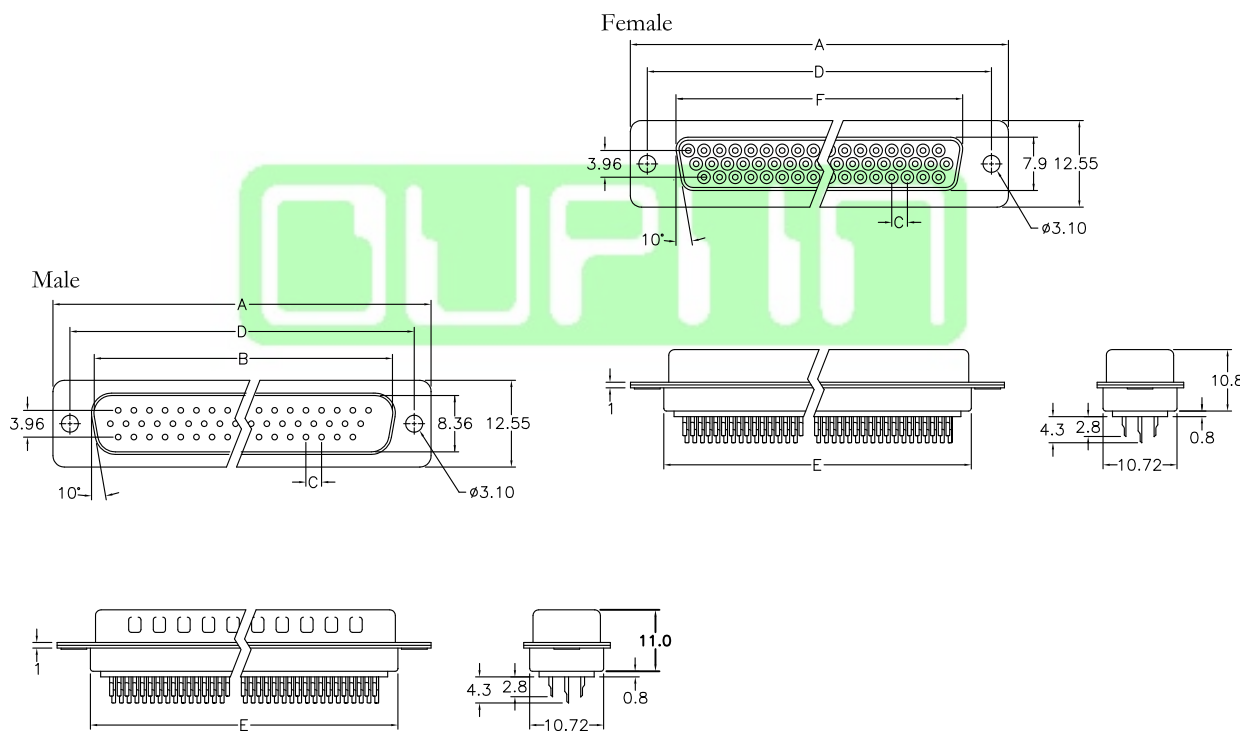

Position	Dimension					
	A	B	C	D	E	F
15	30.81	16.92	2.29	24.99	19.3	16.33
26	39.14	25.25	2.29	33.32	27.5	24.66
44	53.04	38.96	2.29	47.04	41.3	38.38
62	69.32	55.42	2.41	63.50	57.7	54.84

Ordering information


7917- Series
 62 Position
 M M: Male
 T T: Tin Shell
 B B: Black
 C C: Selective Gold Plated
 00 00: G/F
 N1 N1: See Page A160
 A A: Tray Package
 F: Female
 U: Blue
 W: White

Mounting Option




Option N1

With NUTS #4-40 Threaded
Riveted On Face Side




Option N1N6

With NUTS #4-40 Threaded
Riveted On Face Side and
Jack Screws Assembled

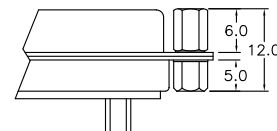


Option N2

With NUTS #4-40 Threaded
Riveted On Rear Side




Option N2N6

With NUTS #4-40 Threaded
Riveted On Rear Side and
Jack Screws Assembled

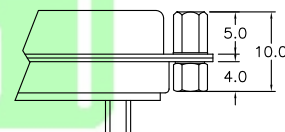

Option N3

With #4-40 Threaded Riveted
Brackets (Board Locks)



Option N3N6

With #4-40 Threaded Riveted
Brackets and Jack Screws
Assembled

