


REV.	SPECIFICATION	ECN NO.	APPD.

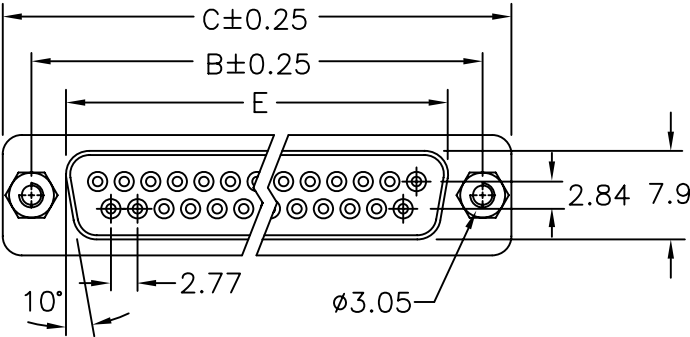

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20m Ωmax. at DC 100mA.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

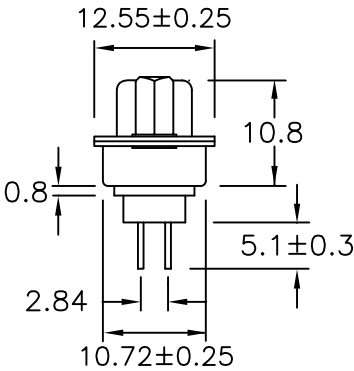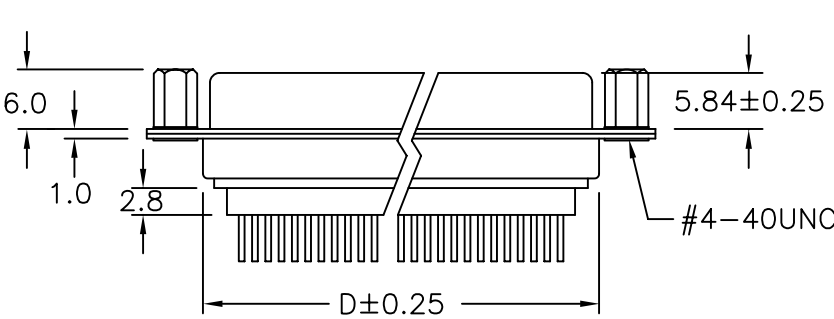

P.C. Board Layout

7925- 25 F T B G 00 N1 A
Series Position F: Female T: Tin Shell B: Black U: Blue W: White G: Gold Plated 00: G/F 10: 10 μ" 15: 15 μ" 30: 30 μ" N1: With NUTS #4-40 Threaded Riveted On Face Side A: Tray Package

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84

Tolerances	Dwg. No.	7925D02001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Peggy10/21'11

Title: 7925 Series D-SUB Straight With Filter Type
Ø767

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7925-xxFTBG00N1A			
SHEET	1/1	Ver.No.	A6