


7936 Series

D-SUB Double Port Right Angle Type

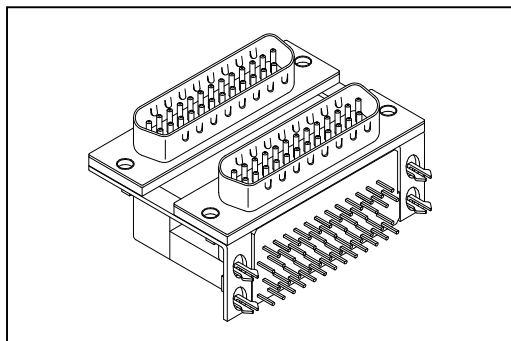

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -55°C~+105°C.

Features:

* Mates with: 7907, 7908.

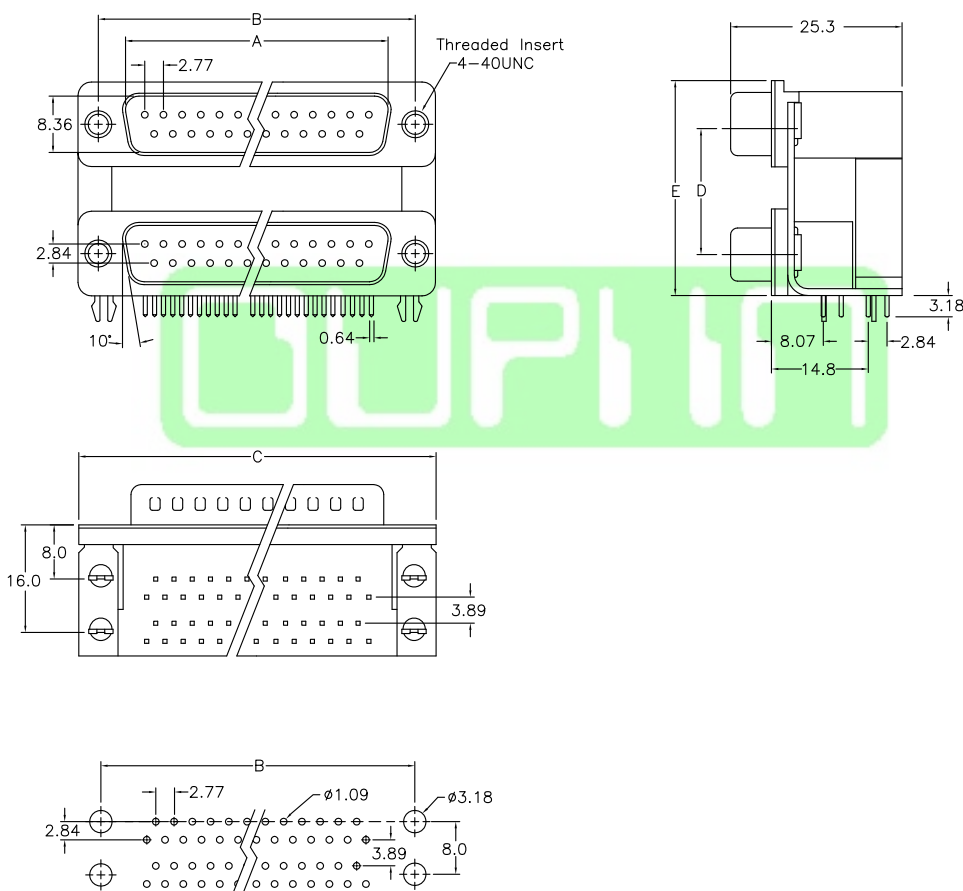

P.C. Board Layout

Position	Dimension									
	A(M)	A(F)	B	C	D			E		
9	16.92	16.32	24.99	30.81	15.88	19.05	22.86	28.43	31.60	35.41
15	25.25	24.66	33.32	39.14	15.88	19.05	22.86	28.43	31.60	35.41
25	38.96	38.38	47.04	53.04	15.88	19.05	22.86	28.43	31.60	35.41

Ordering information

7936- Series
 25 Position
 M Top (M: Male, F: Female)
 M Bottom (M: Male, F: Female)
 B 1: 15.88 See Dim: D (B: Grounding Fork, H: Grounding Fork, Jack Screw Separately, K: Grounding Strap)
 1 2: 19.05 See Dim: D
 3 22.86 See Dim: D
 A Tray Package

* Mix shell size available, Please consult factory.

Information including designs, specifications and components may be changed or updated without notice.