


8208 Series

Mini Edge Card Connector 0.80mm (0.0315")

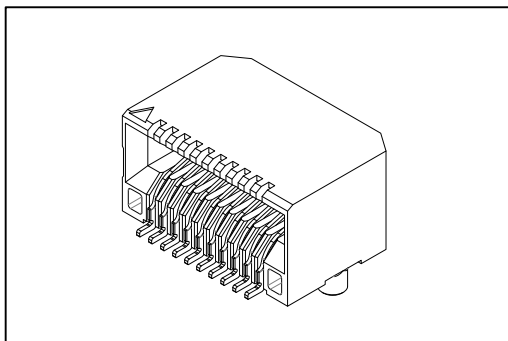

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1.8 A@30°C Temperature Rise.

Dielectric Withstanding Voltage: AC 600V.


Insulator Resistance: 100000MΩ min.

Contact Resistance: 15.8mΩ max.

Operating Temperature: -55°C~+125°C.

Features:

- * Additional plating options available.
- * Mates With: 1.0±0.05mm or 1.57±0.05mm Thick Edge Card.
- * Speed: 14Gbps.

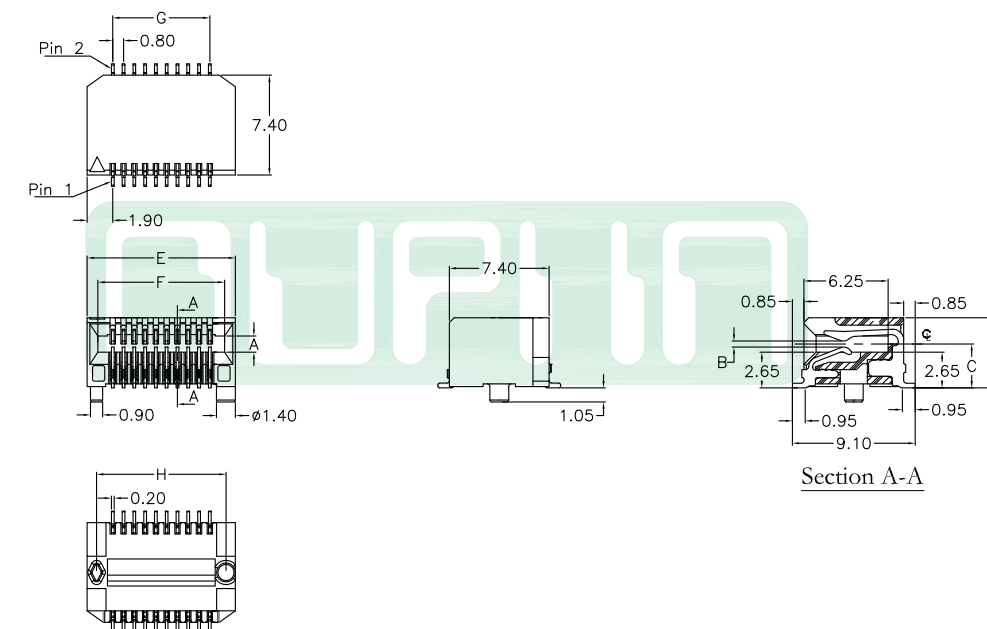

P.C. Board Layout

**Available Card Thickness					
Card Thickness	A	B	C	D	
	1.00	1.20	0.45	3.25	5.20
*	1.57	1.80	0.95	3.54	5.78
**Available Position					
Position	Dimension				
	E	F	G	H	
*	20	11.00	9.40	7.20	9.60
	40	20.60	17.40	15.20	17.60
	60	28.60	25.40	23.20	25.60
	70	32.60	29.40	27.20	29.60

Ordering information

8208- 2 X 10 C 30 D R 2 P N T
 Series Double Row No. of Pin Per Row C:Selective Gold Plated 30: 30μ" D: SMD Type R:Right Angle 2: Card Thickness 1:1.00mm 2:1.57mm P: With Post N: W/O Post L: With Lock N: W/O Lock T: Tape & Reel Package

Information including designs, specifications and components may be changed or updated without notice.

CB06