

REV.	SPECIFICATION	ECN NO.	APPD.





Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 1A.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 500MΩ min.
Contact Resistance: 40mΩ max.
Operating Temperature: -40° C~+85° C.

***RoHS Compliant**

8949-D Series		8:8 Position		8: 8 Contacts		1: 1 Port		/06 06: 06u" Gold Plated		A A: LED1: Green LED2: Yellow		B B: Black		A A: Tray Package	
---------------	--	--------------	--	---------------	--	-----------	--	--------------------------	--	-------------------------------	--	------------	--	-------------------	--

Tolerances		Dwg. No.		8949D02143		Title:		8949-D Series Modular Jack		OUPIN		OUPIN ELECTRONIC(KUNSHAN) CO., LTD.		P/N: 8949-D881/06ABA	
x = ±0.5		Projection		⊕ ⊞						SHEET		1/1		Ver.No.	
.x = ±0.25		Unit		mm		Scale		1:1						A2	
.xx = ±0.15		Drawn By		PEGGY10/11'11		①563									

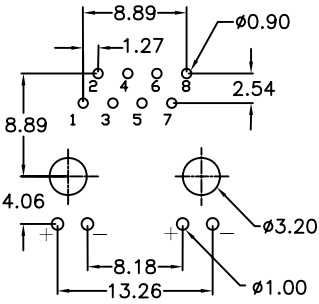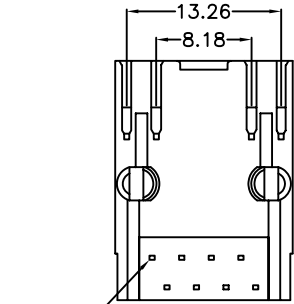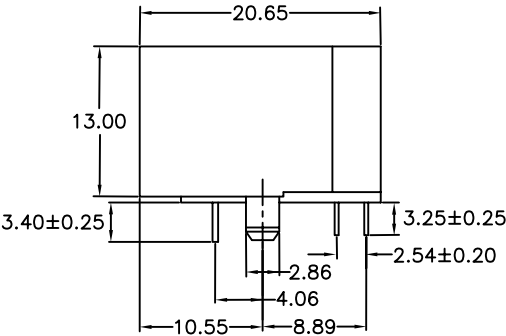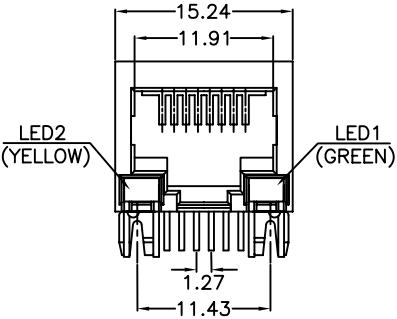

P.C. Board Layout