


8949-I Series

Gang Jack Side Entry Dip Type

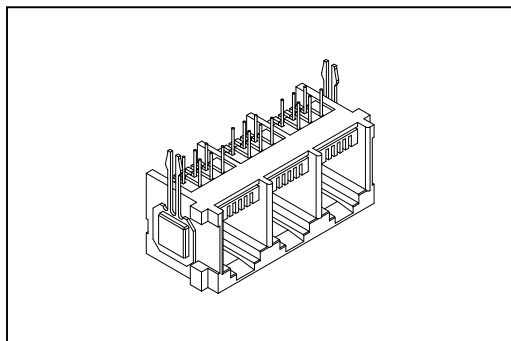

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Plating: Gold plated on contact area over Nickel.

Electrical Characteristics:

Current Rating: 1.5 A.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max.

Operating Temperature: -40°C~+85°C.

Features:

- * 50μ"gold meets FCC 68 requirements.
- * Industry compatible profiles and foot prints.
- * Available in selective loading.
- * Contact pre-loaded and self aligned.
- * Choice of 2 ports through 8 ports.

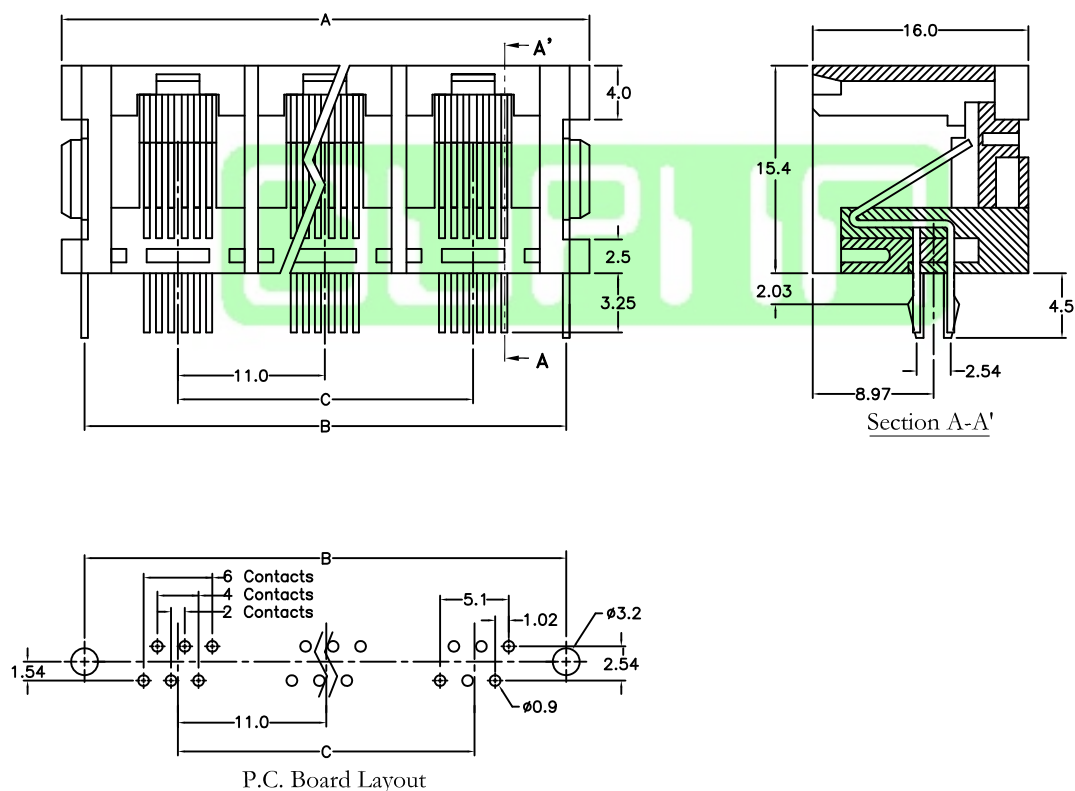

Dimensions	No. of Port						
	2	3	4	5	6	7	8
A	28.0	39.0	50.0	61.0	72.0	83.0	94.0
B	24.8	35.8	46.8	57.8	68.8	79.8	90.8
C	11.0	22.0	33.0	44.0	55.0	66.0	77.0

Ordering information

8949-I	6	6	2	-06	Y	A
Series	6: 6 Position (Only)	6: 6 Contacts 4: 4 Contacts 2: 2 Contacts	2: 2 Port (2 ~ 8 Port)	06: 06μ" Gold Plated 15: 15μ" Gold Plated 30: 30μ" Gold Plated 50: 50μ" Gold Plated	Y: Grey B: Black	A: Tray Package