


8949-ID2 Series

Stacked Jack Side Entry Dip Type

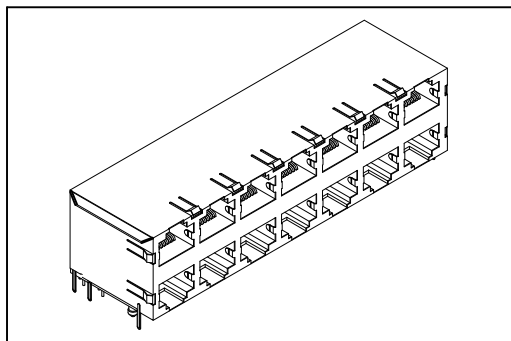

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shield: Copper Alloy, Nickel Plated.

Plating: Selective Gold Plated on contact area over Nickel.

Electrical Characteristics:

Current Rating: 1.5 A.

Insulator Resistance: 1000MΩ min.




Contact Resistance: 30mΩ max.

Operating Temperature: -40°C~+85°C.

Features:

* Stacked PCB Jack.

* Available 4, 8, 12, and 16 ports

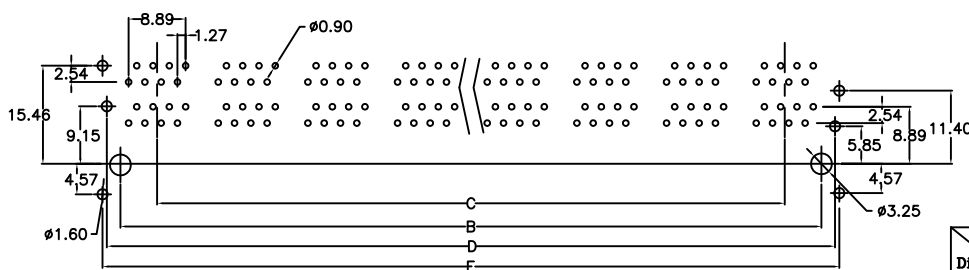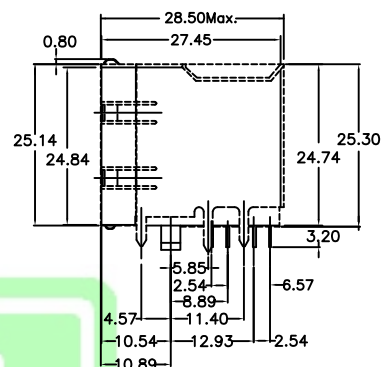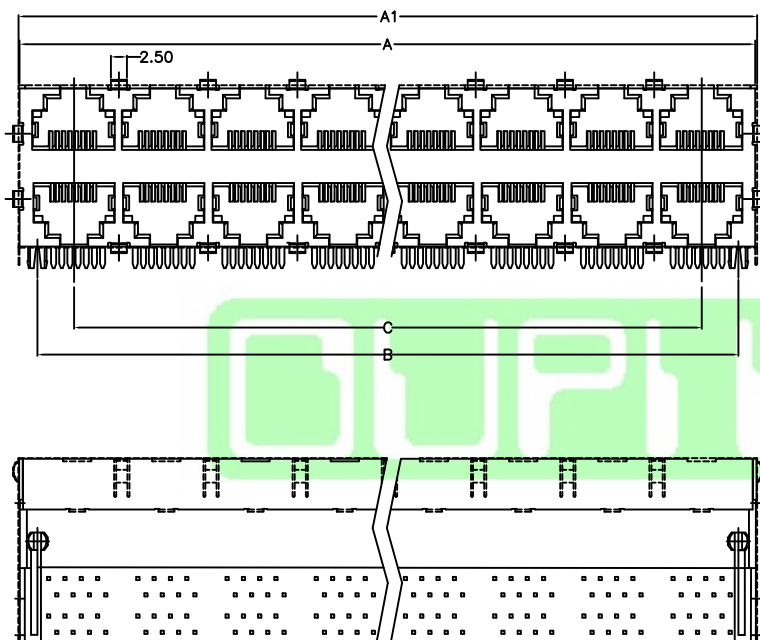

P. C. Board Layout

Port Dim	4	8	12	16
A1	31.24	59.19	87.13	115.07
A	30.52	58.46	86.40	114.34
B	25.40	53.34	81.28	109.22
C	13.97	41.91	69.85	97.79
D	29.65	57.59	85.53	113.40
E	30.98	58.92	86.86	114.80

Ordering information

8949-ID2	8	8	4	-06	S	0	B	A
Series	Position	8: 8 Contacts 6: 6 Contacts 4: 4 Contacts 2: 2 Contacts	4: 2X2= 4Ports 8: 2X4= 8Ports 12: 2X6=12Ports 16: 2X8=16Ports	06: 6 μ" Gold Plated 15: 15 μ" Gold Plated 30: 30 μ" Gold Plated 50: 50 μ" Gold Plated	S: Shield Blank: Non-shield	* 0: Without Grounding * 1: With Grounding	B: Black	A: Tray Package

* Only apply to Shield Type

Information including designs, specifications and components may be changed or updated without notice.

A200