REV.	SPECIFICATION	ECN NO.	APPD.

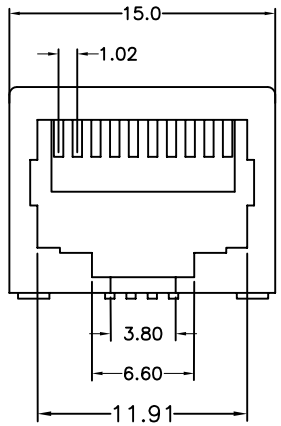

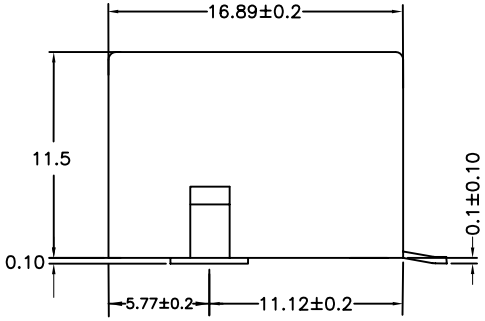



Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1.5 AMP.
Insulator Resistance: 500MΩ min. at DC 500V.
Contact Resistance: 40mΩ max. at DC 100mA.
Operating Temperature: -40°C~+85°C.

***RoHS Compliant**

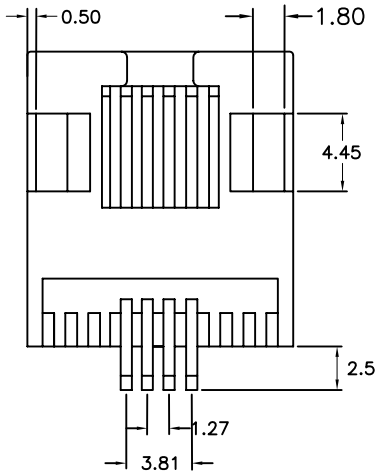

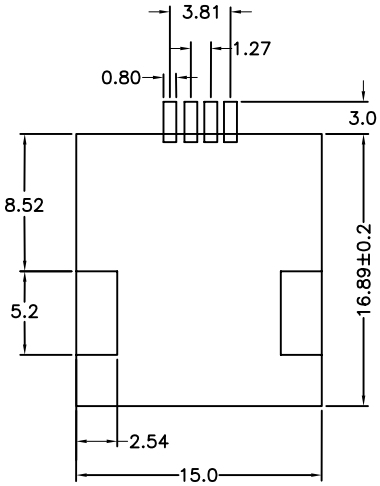

P.C.Board Layout

8949-P	8	4	/06	B	A
Series	8: 8 Position	4: 4 Contacts	06: 06 μ″Gold Plated 15: 15 μ″Gold Plated 30: 30 μ″Gold Plated 50: 50 μ″Gold Plated	B: Black	A: Tray Package T: Tape & Reel Package

Tolerances	Dwg. No.	8949D02123	Title:	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.5 .x = ±0.25 .xx = ±0.15	Projection		8949 Series Side Enter SMD Type	P/N: 8949-P84/06BA
	Unit mm	Scale 1:1		SHEET 1/1 Ver.No. A2
	Drawn By	Peggy09/17'13	①563	