REV.	SPECIFICATION	ECN NO.	APPD.

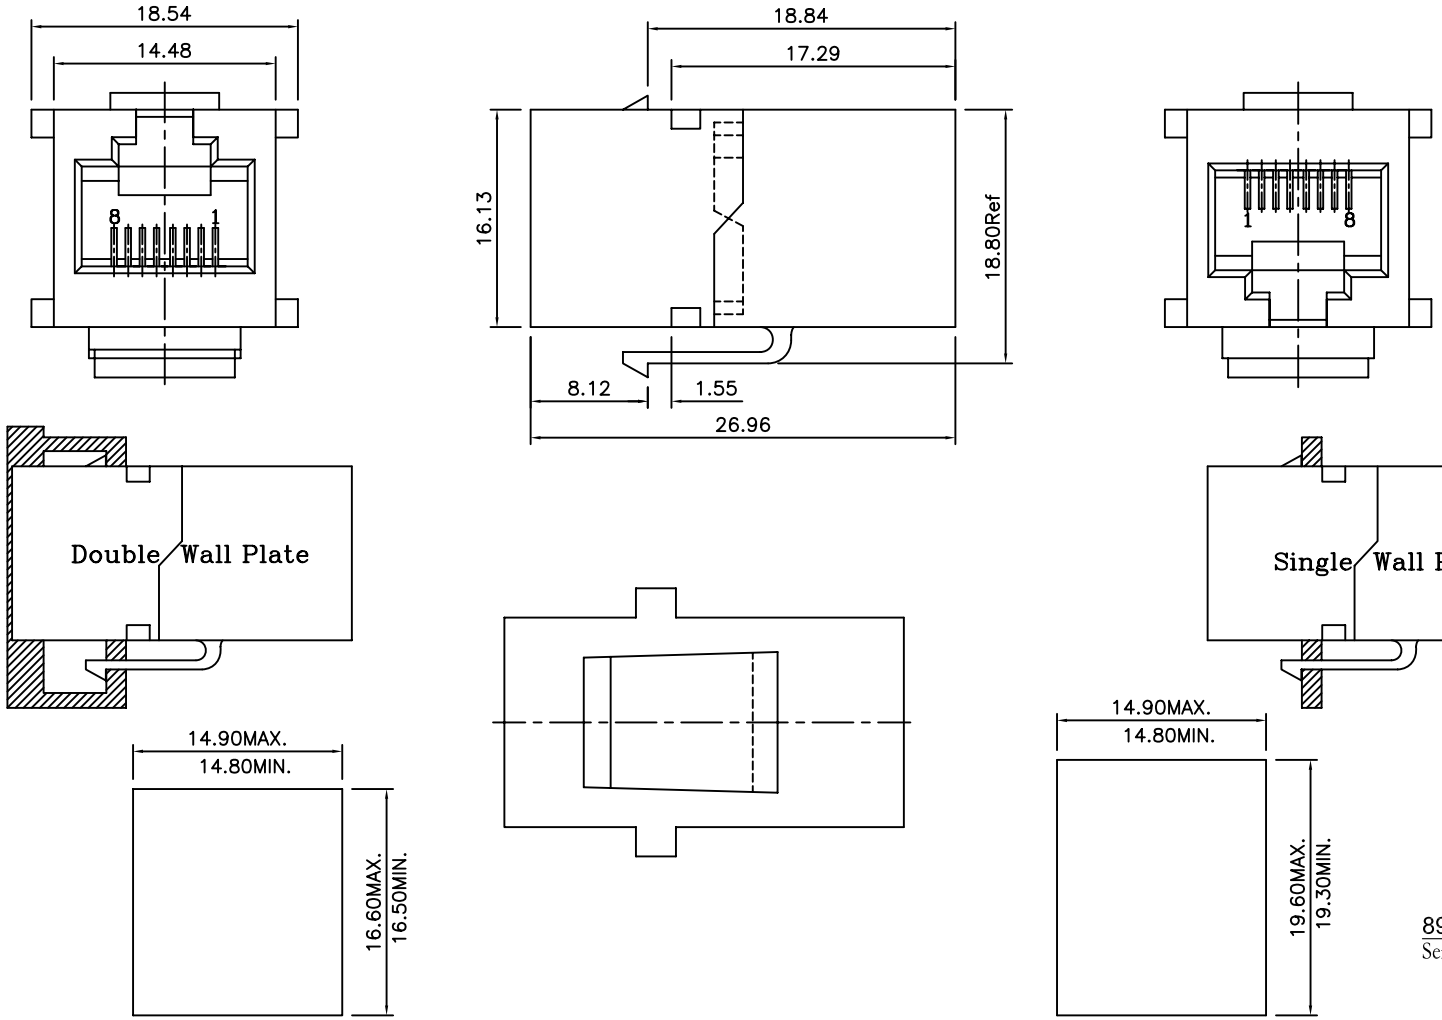

Front Panel Jack Only Clearance
W/O Latch Feature

Single Panel – Latch Clearance
Panel Thichness 0.062 inch

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Plating: Gold plating over nickel in contact.

Electrical Characteristics:

Current Rating: 1.5 AMP.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -40°C~+85°C.

***RoHS Compliant**

8949-Z1	8	8	/06	B	A
Series	Position	8:8 Contacts	06:06u" Gold Plated	B:Black	A:Tray Package

Tolerances	Dwg. No.	8949D02064	Title: 8949-Z1 Series Modular Coupler Jack Non Shielded	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.5	Projection			P/N: 8949-Z188/06BA
.x = ±0.25	Unit mm	Scale 1:1		
.xx = ±0.15	Drawn By	Sunny 08/31'12	①793	SHEET 1/1 Ver.No. A4