




REV.	SPECIFICATION	ECN NO.	APPD.

Material:



Cage: Copper Alloy, Nickel Plating.
 Operating Temperature: -55°C ~ +85°C
***RoHS Compliant**

8951 - 2 S P 0 A
 Series 2: 2 Ports D: Dip P: Spring Plus 0: W/O Light Pipe A: Tray Package



Tolerances	Dwg. No.	8951D00007	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8951-2SPOA
X=±0.30	Projection		8951 Series		
.XX=±0.20	Unit	mm	Scale	1:1	
.XXX=±0.10	Drawn By	Vic Lyu11/19'14	SFP+ 1X2 Cage, R/A, Metal Shield, With Spring		
			Φ 502	SHEET	1/2
				Ver. No.	X1



REV.	SPECIFICATION	ECN NO.	APPD.

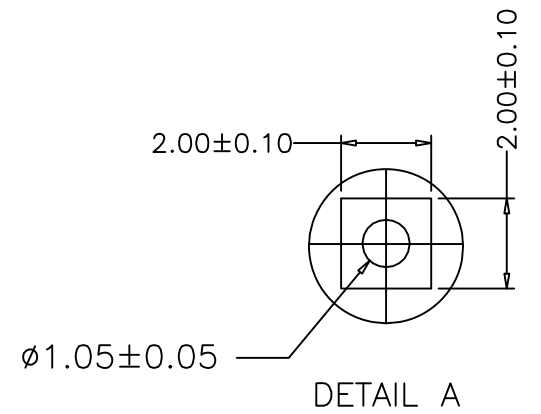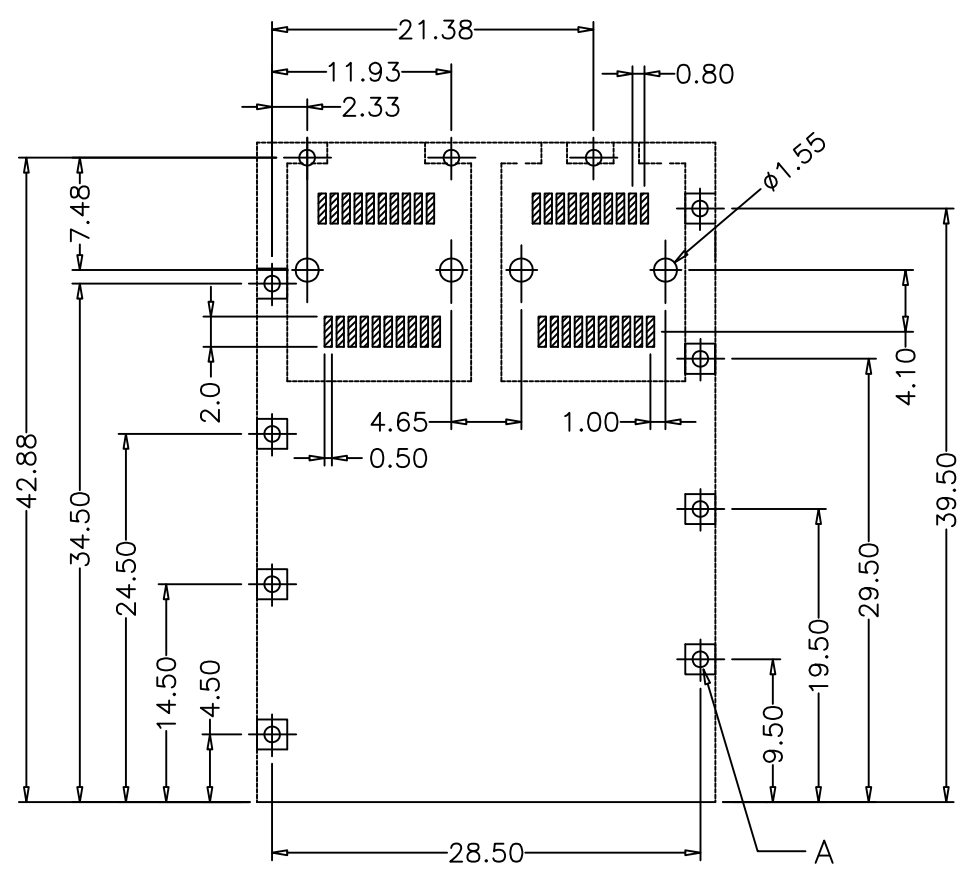

P.C.Board Layout
Tolerances ± 0.05

Tolerances	Dwg. No.	8951D00007	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8951-2SP0A
X ± 0.30	Projection		8951 Series		
XX ± 0.20	Unit	mm	Scale	1:1	
XXX ± 0.10	Drawn By	Vic Lyu11/19'14	SFP+ 1X2 Cage, R/A, Metal Shield, With Spring		
			① 502	SHEET	1/2
				Ver. No.	X1

