

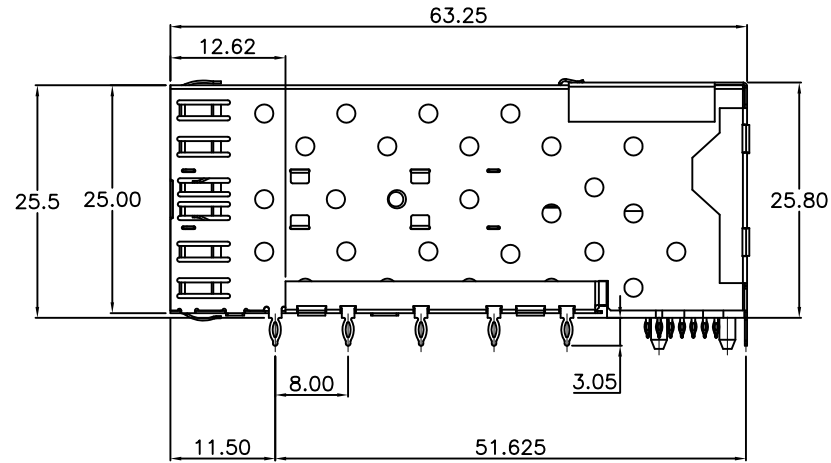
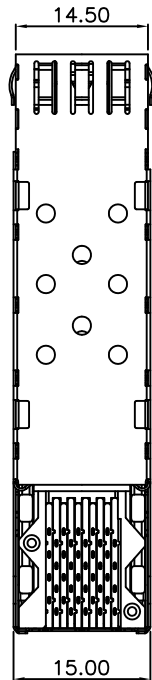




With Light Pipe

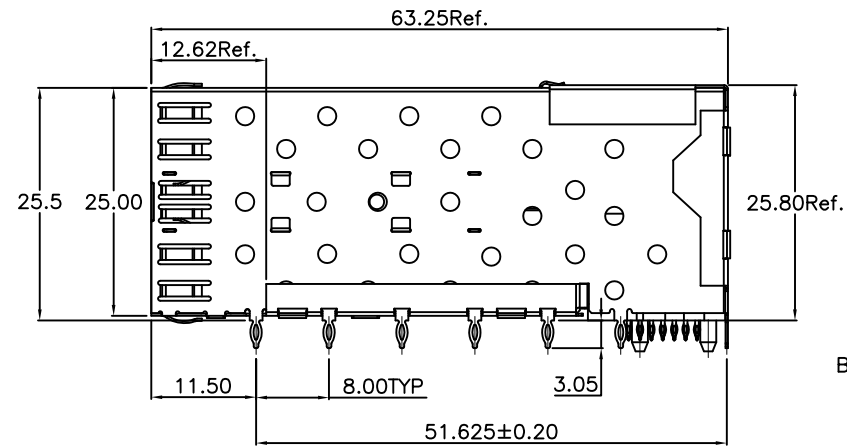

Without Light Pipe

8952-A 2X1 C 15 P S x A
Series
2X1 Port
C: Selective Gold Plated
15: 15 μ "
P: Press Fit
A: Tray Package
0: Without Light Pipe
1: With Inner Light Pipe
2: With Outer Light Pipe
3: With Inner&Outer Light Pipe
S: Spring

Tolerances	Dwg. No.	8952D00010	Title:	
.x = ± 0.35	Date		8952 Series	
.xx = ± 0.25	Unit mm	Scale	SFP 2X1 Cage, R/A, Metal Shield	
.xxx = ± 0.15	Drawn By	Scott 07/11'16	Press Fit Type With Connector	

①665

REV.	SPECIFICATION	ECN NO.	APPD.



Material:


Housing: High Temperature Plastic UL94V-0, Black.
Terminal: Copper Alloy, Gold Plated on Contact Area
Matte Tin Plating on Solder Tail.


Cage: Copper Alloy.

Operating Temperature: -40°C~+85°C

***RoHS Compliant**

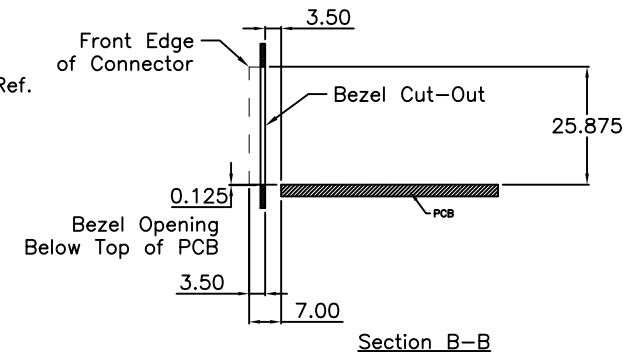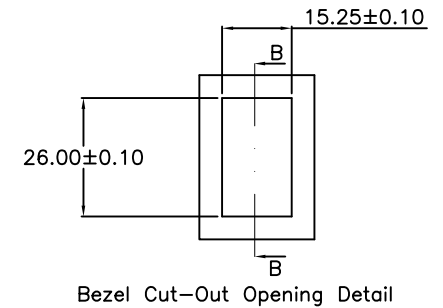


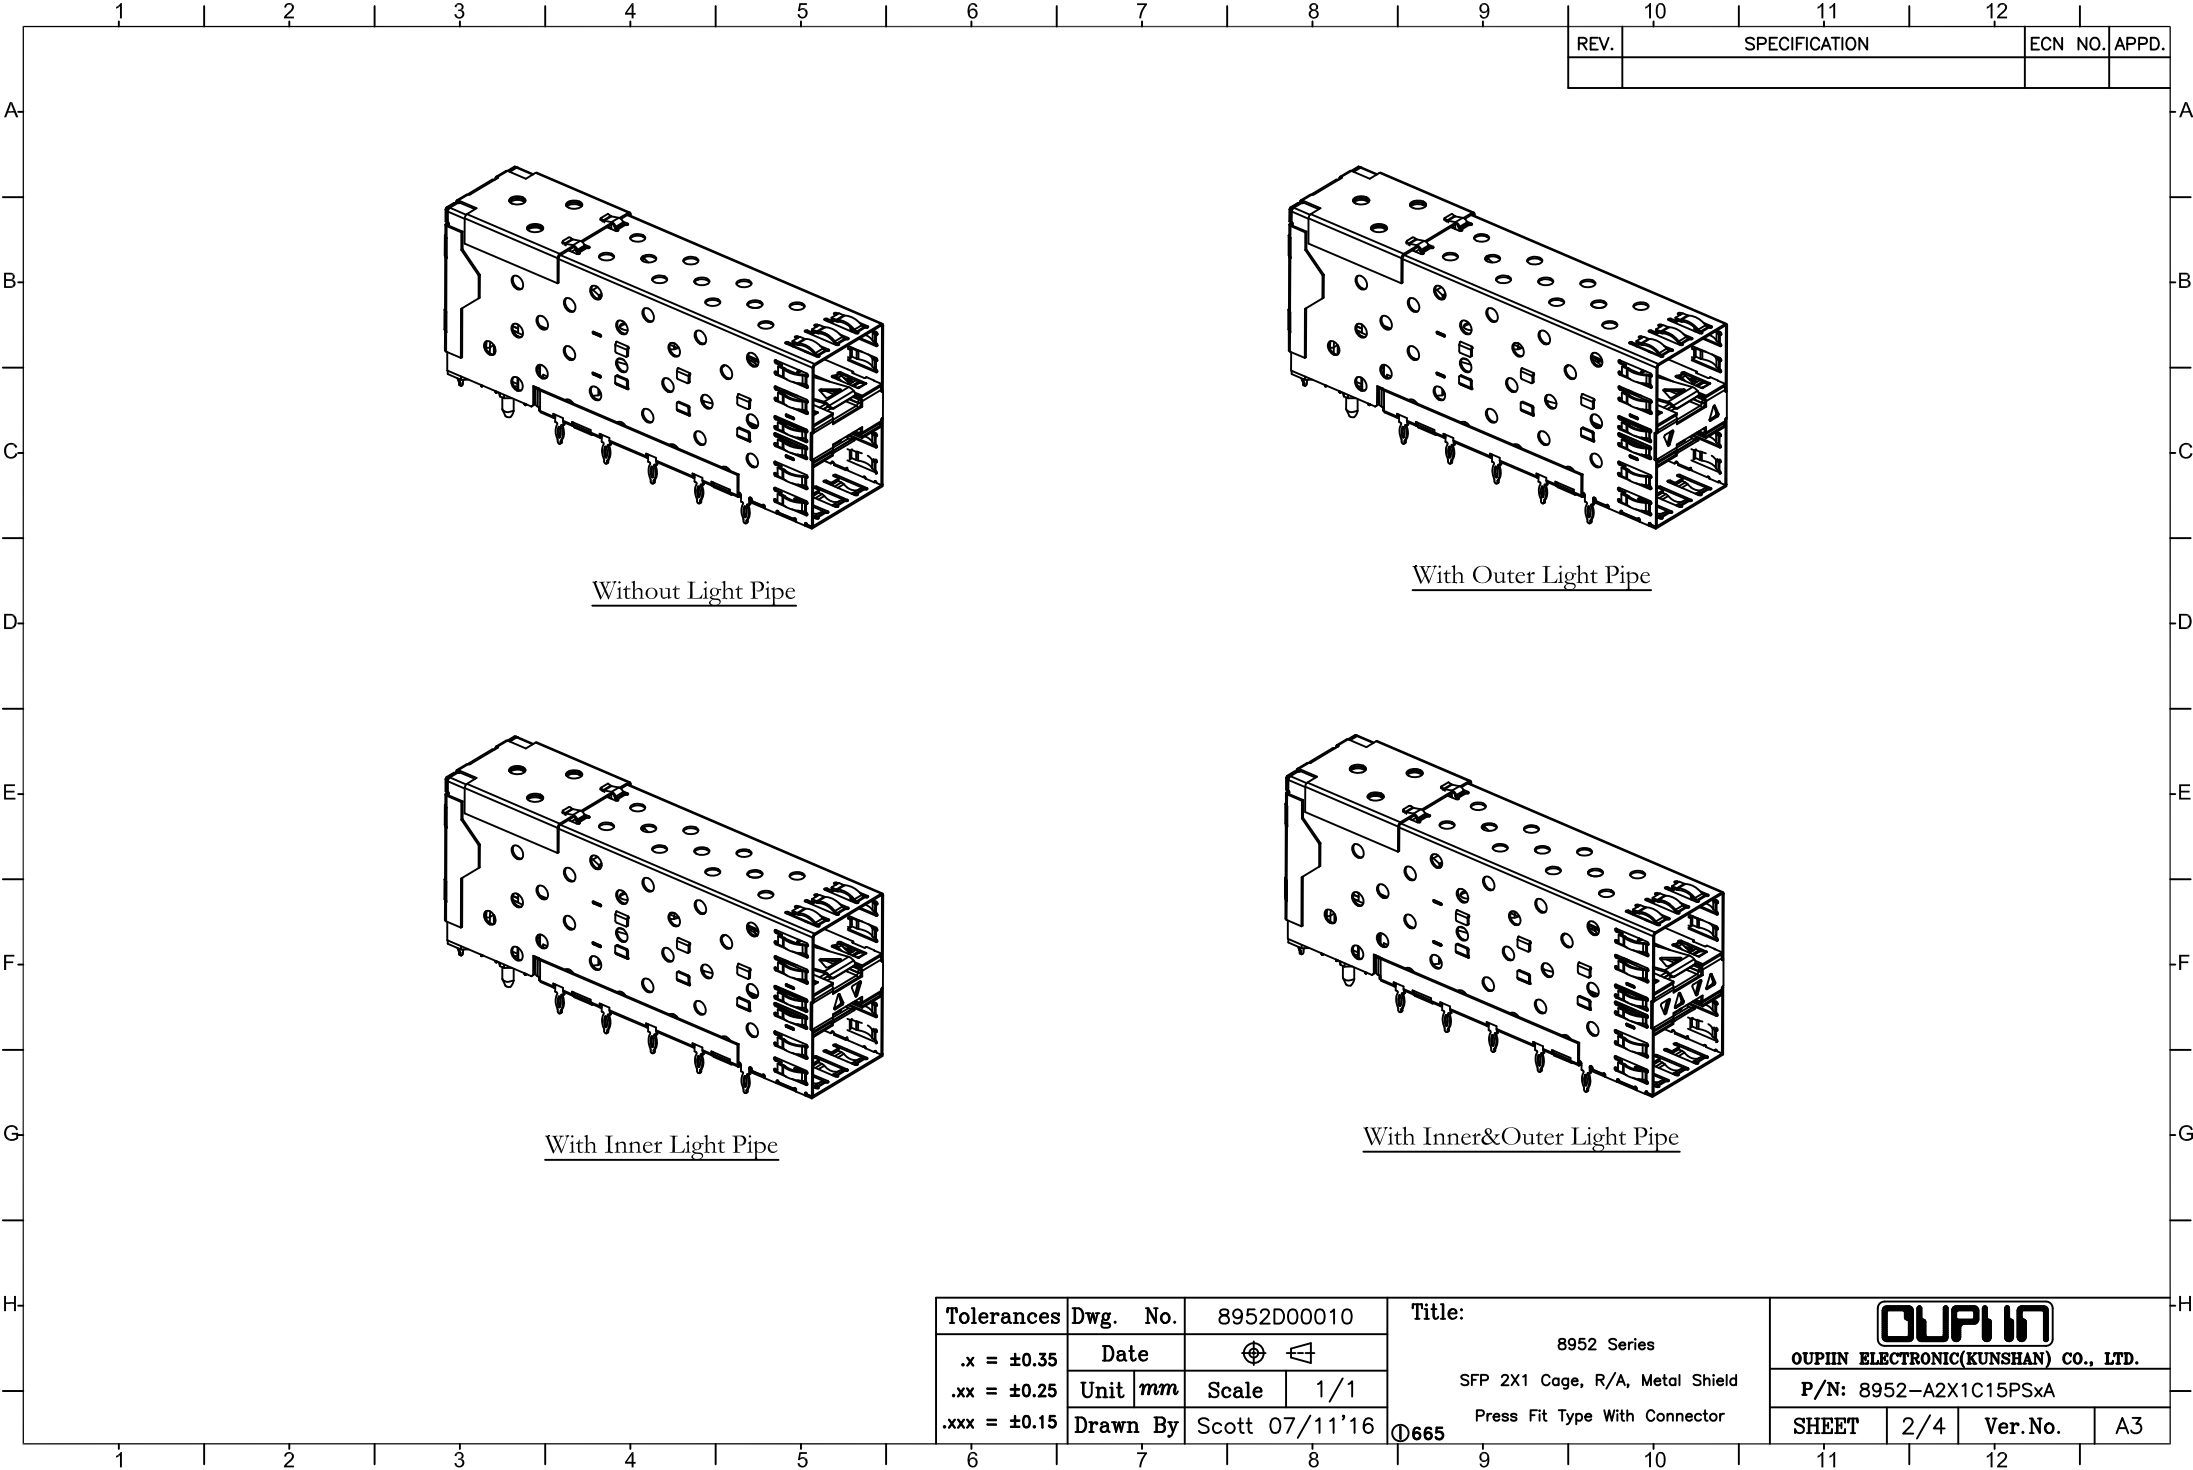

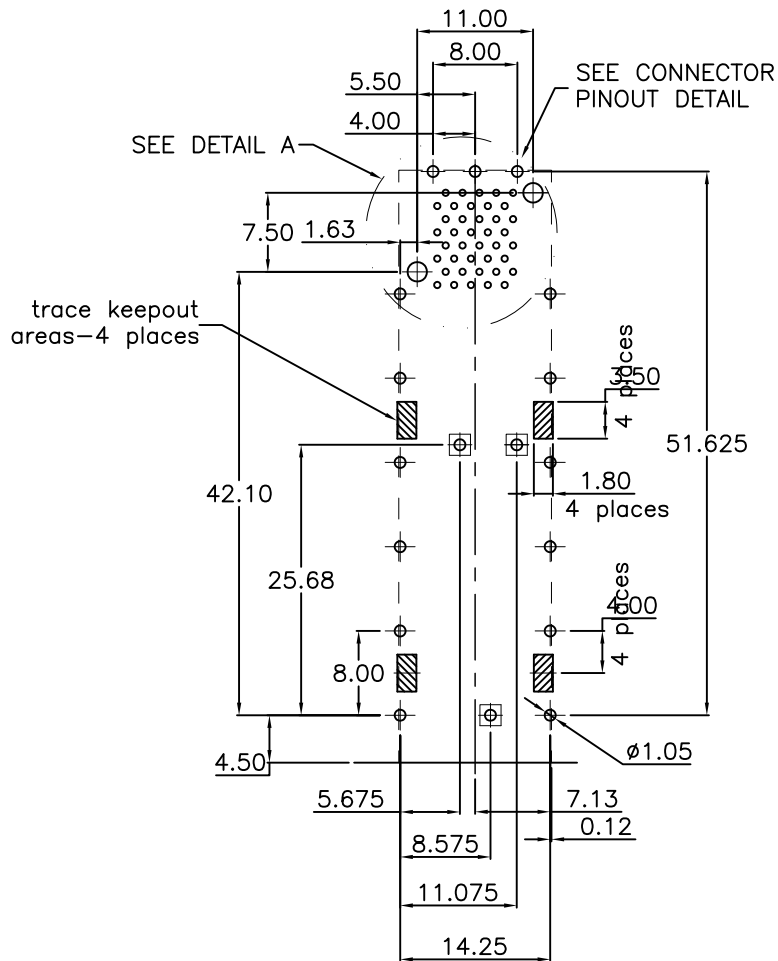


P.C.Board Layout Without Light Pipe

1. Recommended PCB Thickness:2.36
(Minimum PCB Thickness:1.57)
2. Our connector without correspondent posts as show for , considering customer may choose compatible parts to instead, we suggest that you design the PCB layout as show with 3 holes.

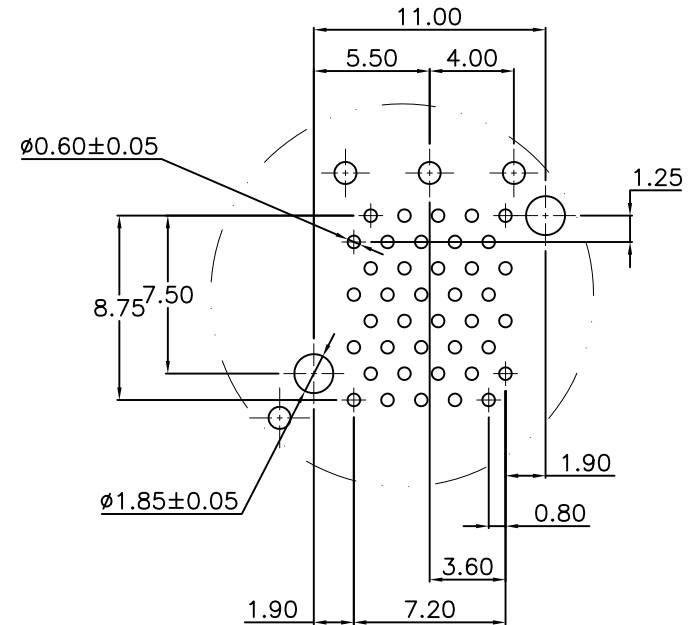

DETAIL A(SCALE 2:1)

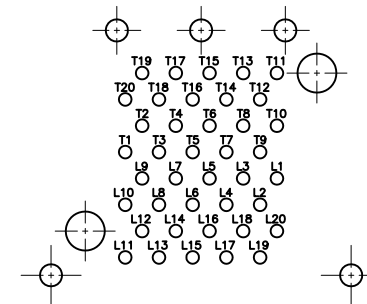

CONNETTON PINOUT DETAIL
COMPONENT SIDE OF BOARD

Tolerances	Dwg. No.	8952D00010
.x = ± 0.35	Date	
.xx = ± 0.25	Unit	mm
.xxx = ± 0.15	Scale	1/1
	Drawn By	Scott 07/11'16

Title: 8952 Series
SFP 2X1 Cage, R/A, Metal Shield
Press Fit Type With Connector

①665

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 8952-A2X1C15PSxA

SHEET

3/4

Ver.No.

A3

			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8952-A2X1C15PSxA			
SHEET	4/4	Ver.No.	A3