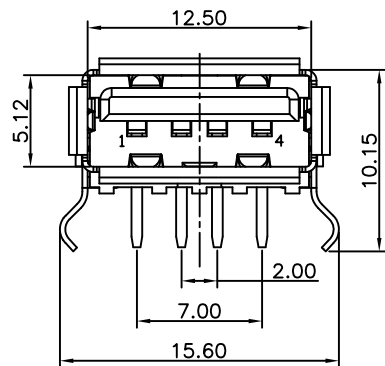

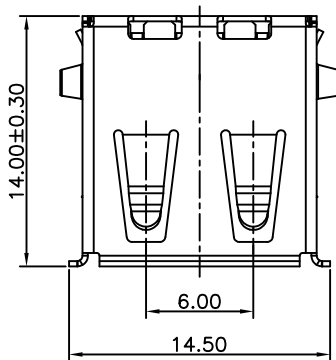


P.C. Board Layout

REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Shell: Copper Alloy.
Electrical Characteristics:
Voltage Rating: AC 30V.
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulator Resistance: 1000MΩmin.
Contact Resistance: 30mΩ max.
Operating Temperature: -55C~+85°C.
Mechanical Characteristics:
Mating Force: 3.57 Kgf max.
Unmating Force: 1.02 Kgf min.
Durability: 1500 Cycles.
***RoHS Compliant.**

8968A-A 04 C 00 R x A
Series Position C: Selective 00: G/F R: Right Angle W: White A: Tray Package
Gold Plated 30: 30μ"

Tolerances	Dwg No.	8968D00024		Title: 8968A Series USB A Type	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ±0.50	Projection				P/N: 8968A—A04C00RxA			
.x = ±0.30	Unit mm	Scale	1:1		SHEET	1/1	Ver.No.	A2
.xx = ±0.25	Drawn By	Vic Lyu11/27'15						