


8968-A Series

USB A Plug SMD Type

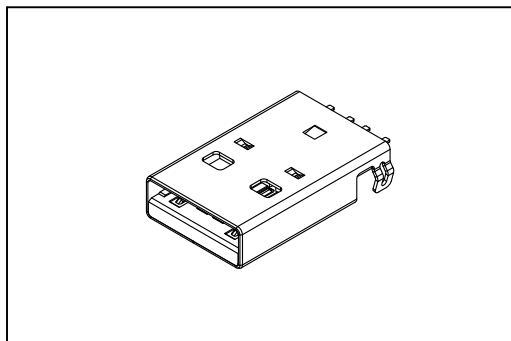

Material:

Housing: High Temperature Plastic UL94V-0.
 Contacts: Copper Alloy.
 Shell: Metal.

Electrical Characteristics:








Current Rating: 1A.
 Dielectric Withstanding Voltage: AC 500V.
 Insulator Resistance: 500MΩ min.
 Contact Resistance: 30mΩ max.
 Operating Temperature: -40°C ~ +85°C.

Features:

Mates with: 8968-A04R, 8968-A04UR, 8968-A08R.

M1 Type

M2 Type

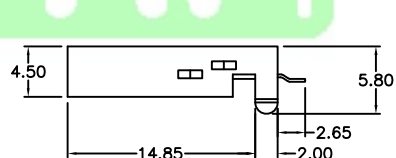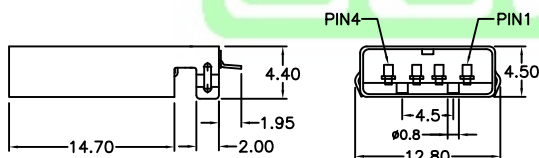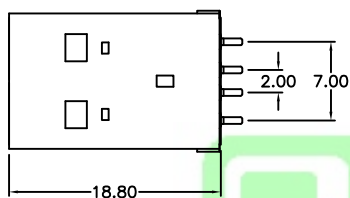

P.C. Board Layout

P.C. Board Layout

Ordering information

8968-A	04	C	00	D	B	M1	A
Series	Position	C: Selective Gold Plated	00: G/F 30: 30 μ"	D: SMD Type	B: Black W: White	M1: M1 Type M2: M2 Type	A: Tray Package