


# 8968-A Series Stack

## USB A Type

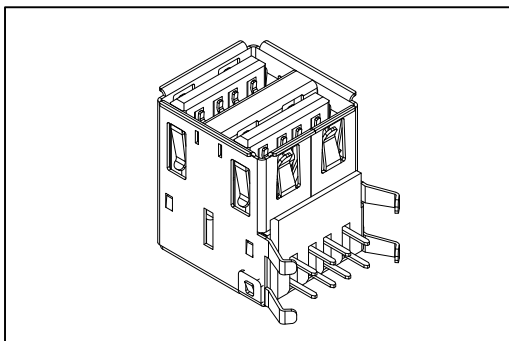

### Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Copper Alloy.

### Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 500V.


Insulator Resistance: 500MΩ min.

Contact Resistance: 30mΩ max

Operating Temperature: -40°C~+105°C.

### Features:

- \* Compact and low profile design for saving space.
- \* High reliable contact with low insertion force.
- \* Straight and Right Angle Type facilitate engineering design.

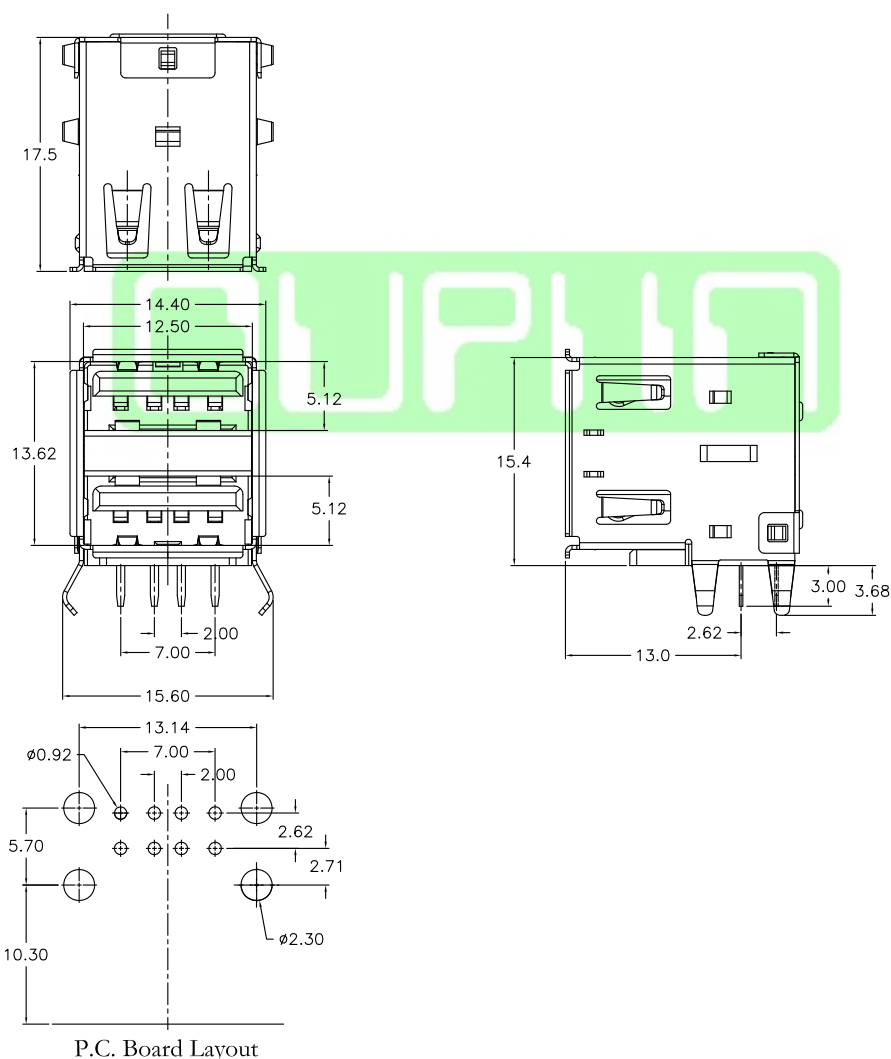

## Ordering information

8968-A  
Series

08  
Position

C  
C: Selective Gold Plated

00  
00: G/F  
30: 30 μ"

R  
R: Right Angle

W  
W: White  
B: Black

A  
A: Tray Package

Information including designs, specifications and components may be changed or updated without notice.

A171