


REV.	SPECIFICATION	ECN NO.	APPD.
R1			

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Shell: Copper Alloy.
Back Cover: Metal.

Electrical Characterstics:
Voltage Rating: AC 30V.
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 500V for 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 30m Ω max. at DC 100mA.
Operating Temperature: -55C~+85°C.

Mechanical Characteristics:
Mating Force: 35N Max.
Unmating Force: 10N Max.
Durability: 1500 Cycles.

***RoHS Compliant**

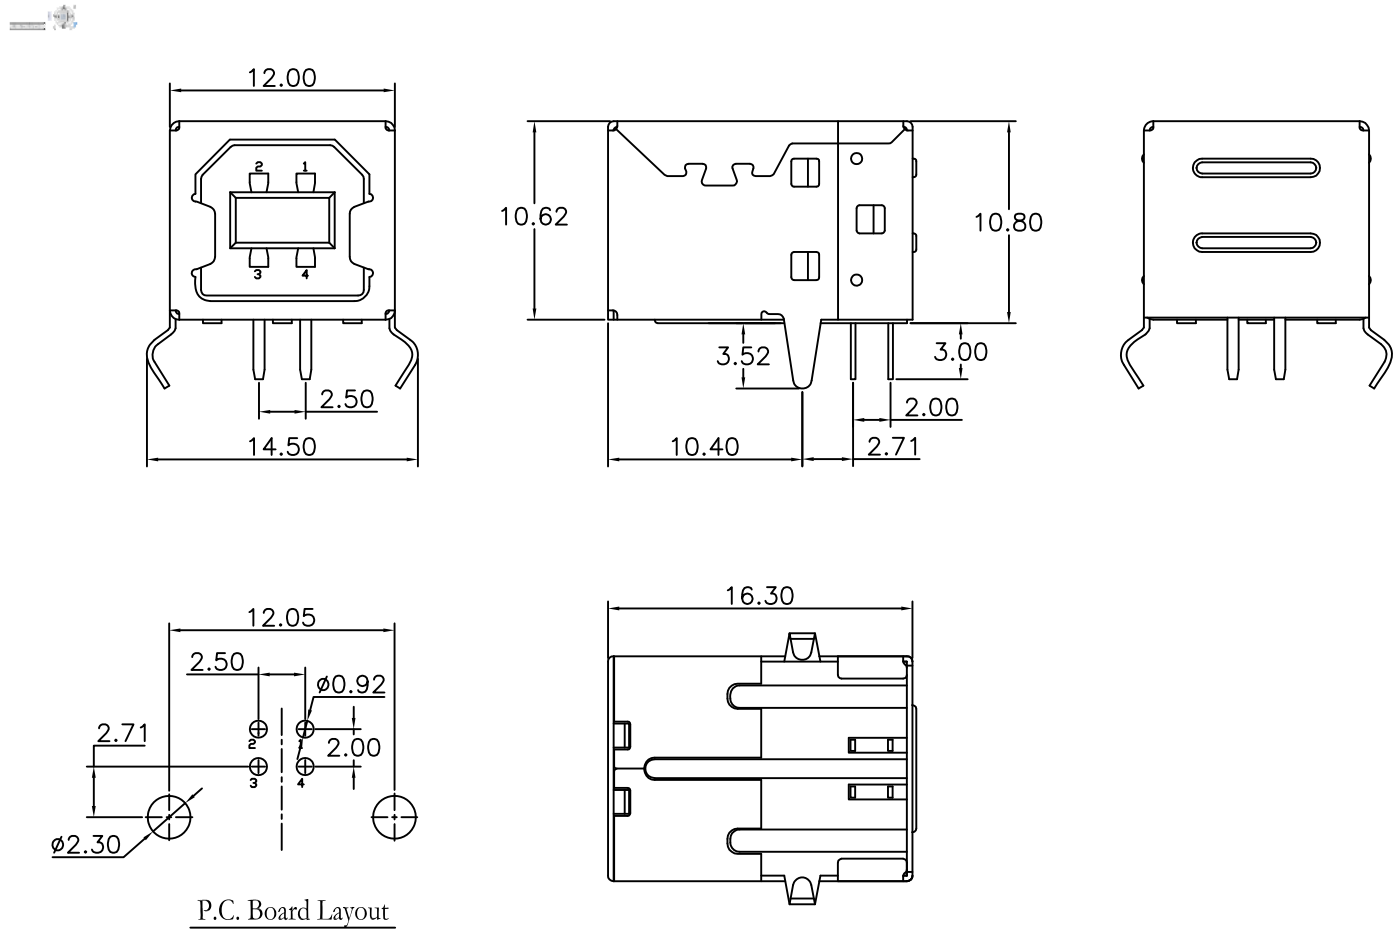

8968-B 04 C 00 R x 2 A
Series Position C: Selective 00: G/F R: Right W: White 2: Type 2 A: Tray
Gold Plated 30: 30 μ " Angle B: Black Package

Tolerances	Dwg No.	8968D00029	Title:	OUPIIN			
x = ± 0.50	Projection		8968 Series	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
.x = ± 0.30	Unit mm	Scale 1:1	USB B Type	P/N: 8968-B04C00Rx2A			
.xx = ± 0.25	Drawn By	Vic Lyu01/21'16	785	SHEET	1/1	Ver.No.	A2