

REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: High Temperature Plastic UL94V-0,Blue.
Contacts: Copper Alloy.
Shell: SPCC.

Electrical Characteristics:
Current Rating: 1.8A (Only Pin1 and Pin4).
0.25A (For Other Pin).
Dielectric Withstanding Voltage : 100V AC min.
Insulation Resistance: 100MΩ min.
Contact Resistance: 50mΩ max.
Operating Temperature:-55°C~ +85°C.

***RoHS Compliant**

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND-DRAIN
8	StdA_SSTX-
9	StdA_SSTX+

Tolerances

x = ±0.5

.x = ±0.38

.xx = ±0.25

Dwg. No.

Projection

Unit

Drawn By

8972D02006

mm

Peggy04/02'14

Title:

8972 Series

USB 3.0 Plug A Type

Q705

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 8972-A09C30DNUM1A




SHEET

1/1

Ver.No.

A2

A
B
C
D
E
F
G
H

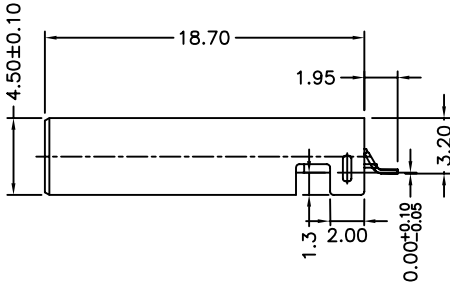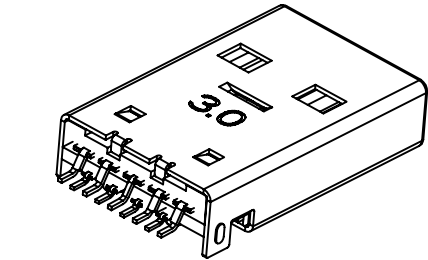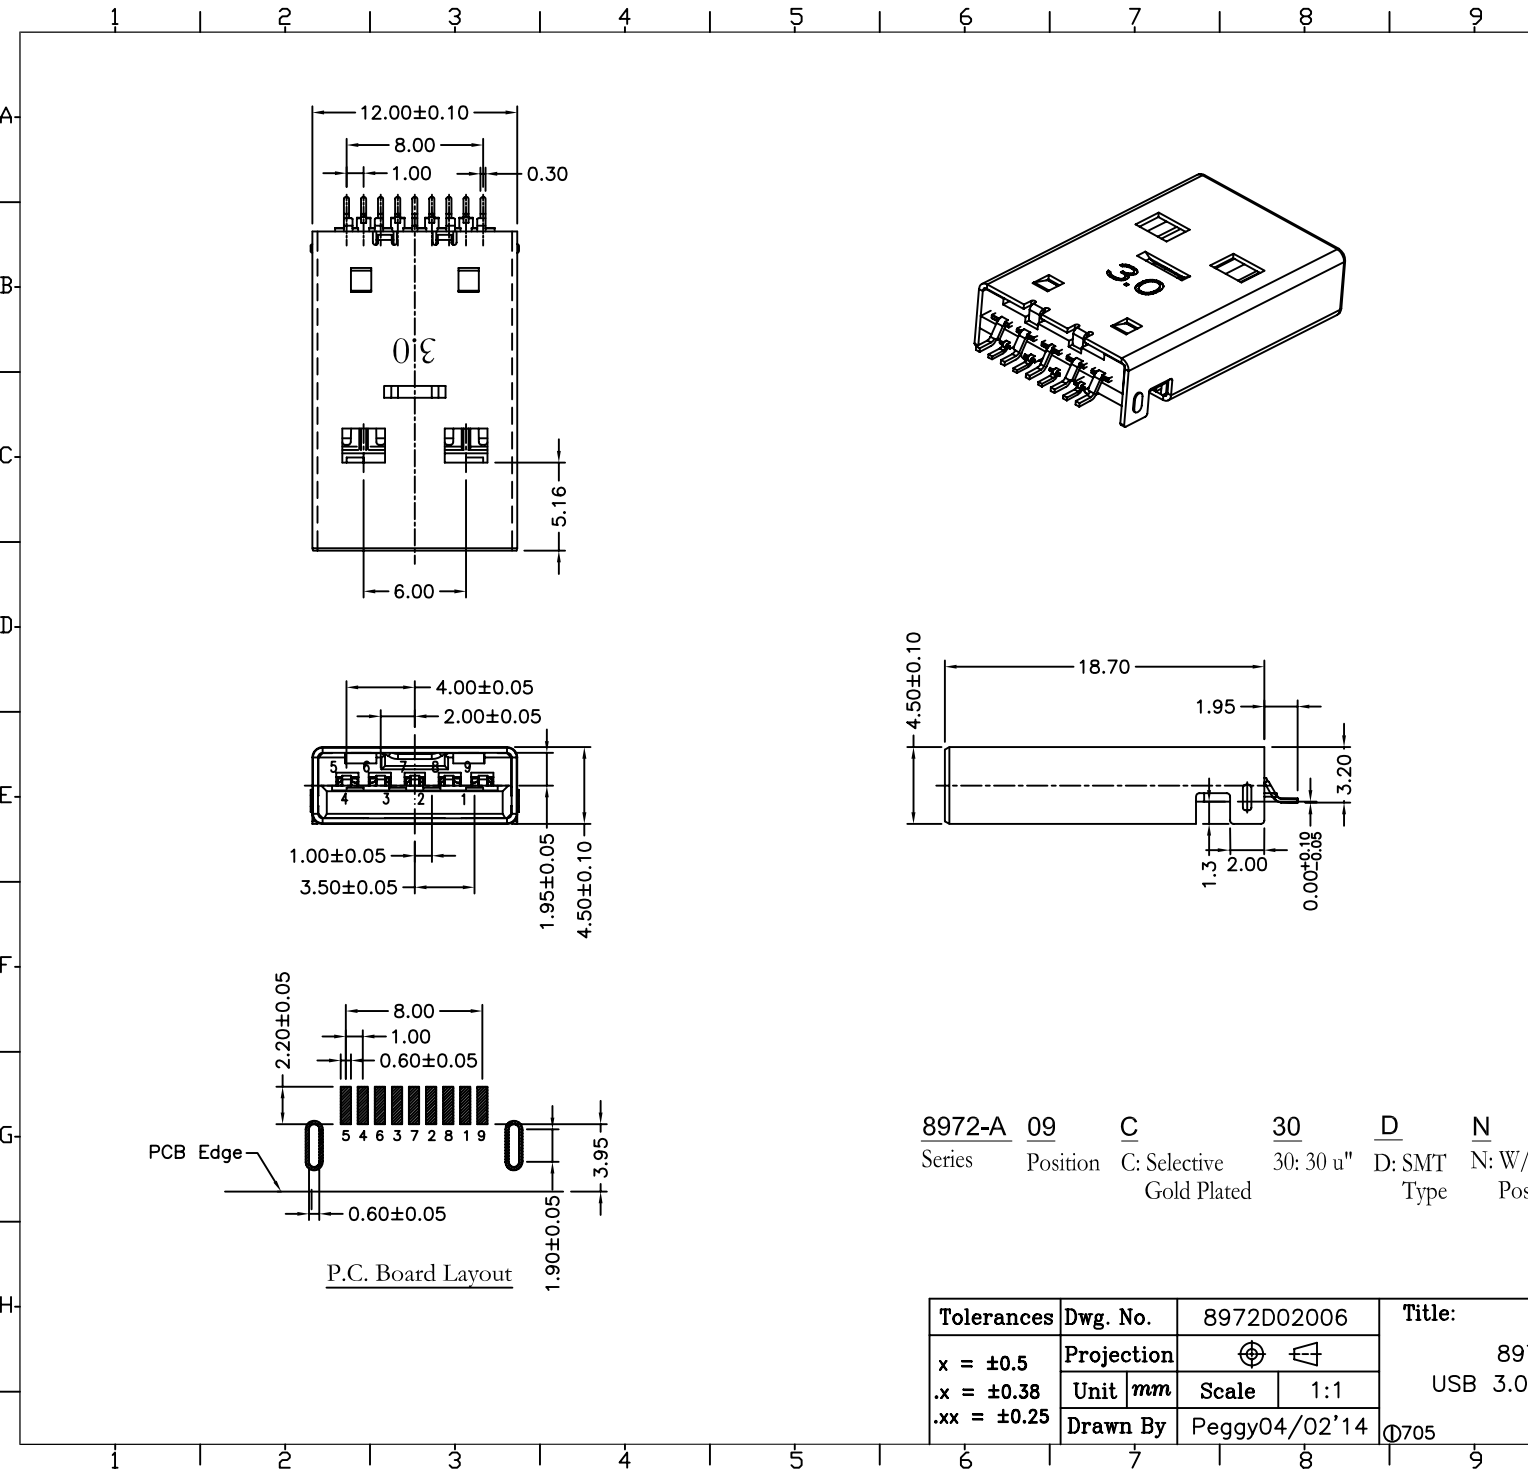

8972-A 09 C 30 D N U M1 A
Series Position C: Selective Gold Plated 30: 30 u" D: SMT Type N: W/O Post U: Blue M1: M1 Type A: Tray Package

Tolerances	Dwg. No.	8972D02006		Title: 8972 Series USB 3.0 Plug A Type					
x = ±0.5	Projection				OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
.x = ±0.38	Unit	mm	Scale		1:1	P/N: 8972-A09C30DNUM1A			
.xx = ±0.25	Drawn By	Peggy04/02'14			Q705	SHEET	1/1	Ver.No.	A2