


8972-A Series

USB 3.0 A Type

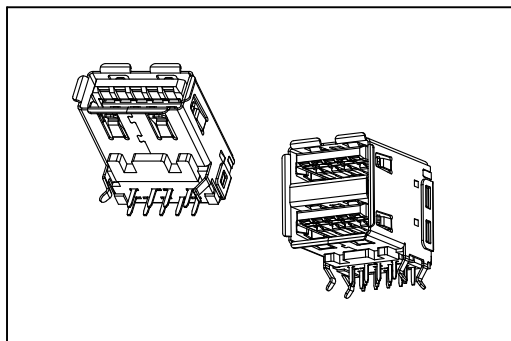

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Copper Alloy.

Electrical Characteristics:

Current Rating: 1.8 A/0.25 A .


Dielectric Withstanding Voltage: AC 100V .

Insulator Resistance: 100MΩ min.





Contact Resistance: 50mΩ max.

Operating Temperature: -55°C~ +85°C.


8972-A09C30RUA



8972-A18C30RUA

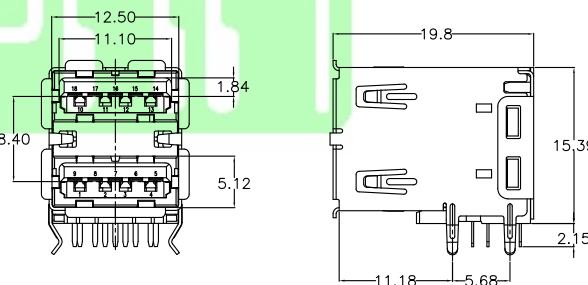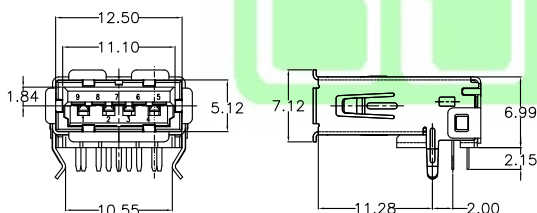

P. C. Board Layout

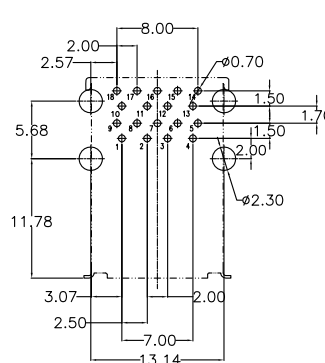

P. C. Board Layout

Ordering information

8972-A

Series

18

09:Position 09
18:Position 18

C

C: Selective
Gold Plated

30

30: 30 u"

R

R: Right Angle

U

U: Blue

A

A: Tray Package

Information including designs, specifications and components may be changed or updated without notice.

A161