
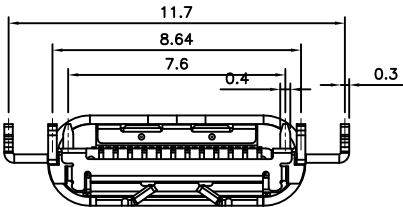
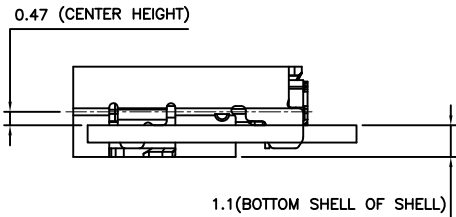
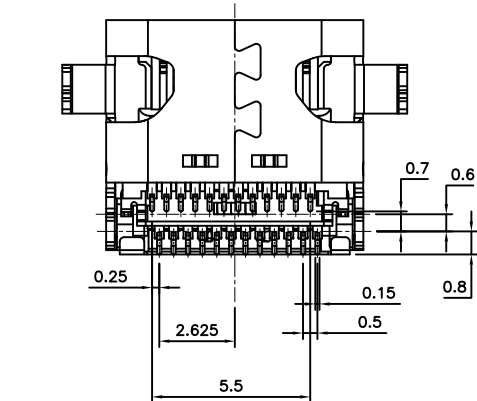

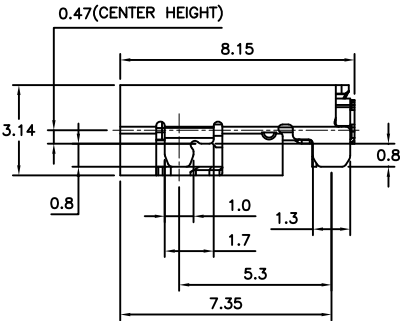


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.
Shell: Metal.
Electrical Characteristics:
Current Rating: 5.0A for VBUS and GND.
(i.e., Pins A4,A9,B4,B9)
1.25A for Vconn and GND.
(i.e., Pins B5,A1,A12,B1,B12)
0.25A for all the others contacts.

Dielectric Withstanding Voltage: AC 100V min.
Insulator Resistance: 100MΩ min. at DC 250V.
Contact Resistance: 40mΩ max.
Operating Temperature: -55°C~+85°C.

Mechanical Characteristics:
Insertion Force: 5N~20N.
Extraction Force: 8N~20N.
Durability: 10000 Cycles.
***RoHS Compliant.**
Speed: 10Gbps.

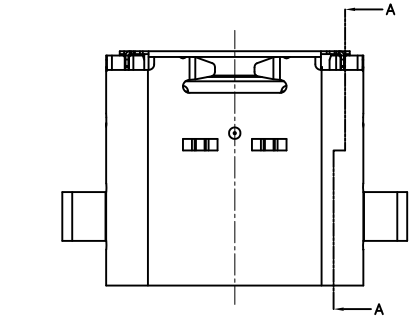


8975-C 24 Cxx D B 5 N T
Series Position C00: Selective Gold Plated D: SMD Type B: Black 5: Type 5 N: Without Post T: Tape & Reel
Gold Flash Package
C30: Selective Gold Plated 30μ"

Tolerances	Dwg No.	8975D02002
.X = ±0.30	Projection	
.XX = ±0.20	Unit	mm
.XXX = ±0.15	Scale	1:1
	Drawn By	Scott 09/08'16

Title:	8975 Series
	USB 3.1 C Type
	Receptacle SMD

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8975-C24C30DB5NT			
SHEET	1/2	Ver. No.	A4

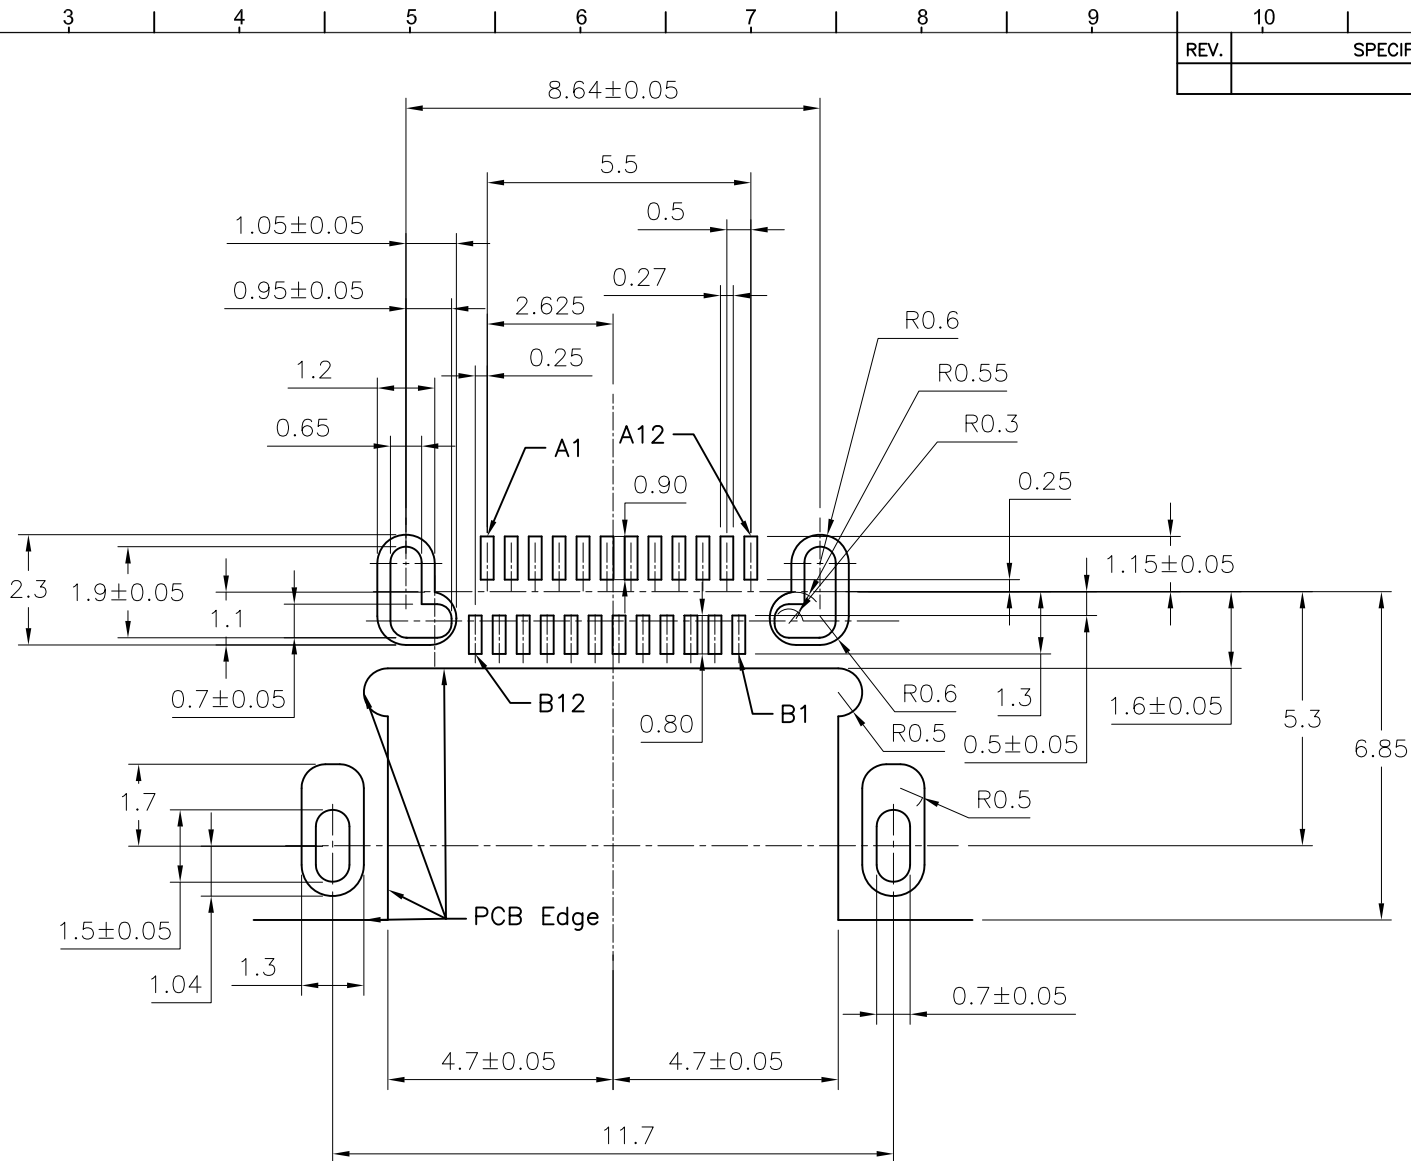

P.C.Board Layout

Tolerances	Dwg No.	8975D02002	
.X = ±0.30	Projection		
.XX = ±0.20	Unit	mm	Scale 1:1
.XXX = ±0.15	Drawn By	Scott 09/08'16	

Title:

8975 Series
USB 3.1 C Type
Receptacle SMD



OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 8975-C24C30DB5NT

SHEET	2/2	Ver. No.	A4
-------	-----	----------	----