


9001 Series

DIN41612 3 Rows 96P Shroud



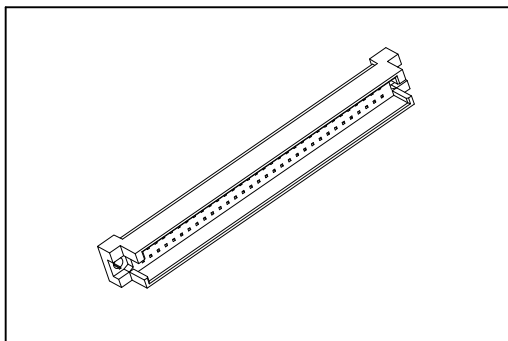


Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0

Electrical Characteristics:

Operating Temperature: -55°C ~ +125°C.

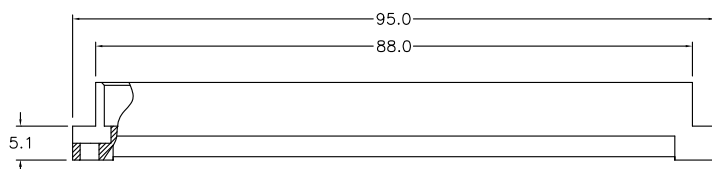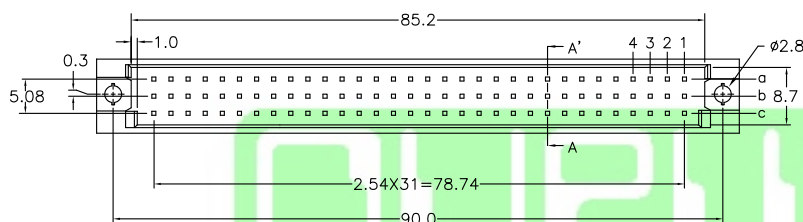

Section A-A'

Ordering information

9001-	<u>1</u>	<u>3</u>	<u>Y2</u>	<u>B</u>
Series	2.54mm	3: Male	Y: Grey	B: Bulk Package