


9001 Series

DIN41612 R Type 150P Female

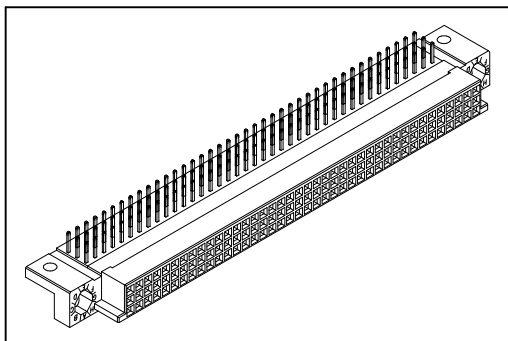

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.





Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -55°C~+125°C.

Features:

- * Mates with Male 3Row
9001-111501C, 131501C

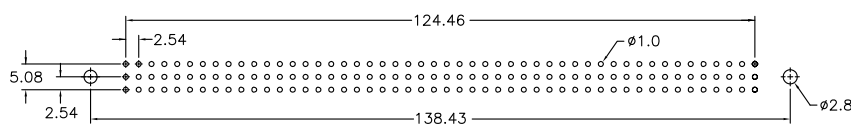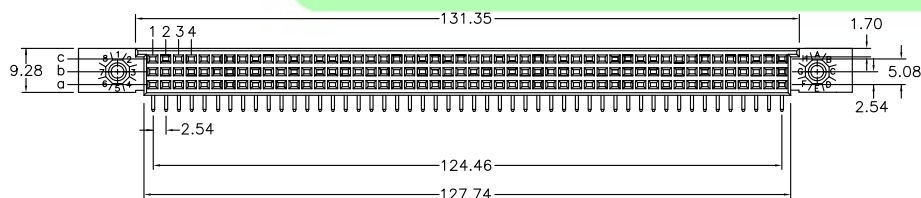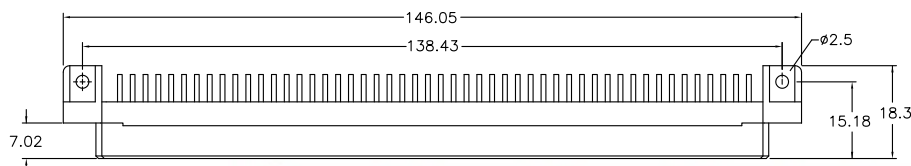

P.C. Board Layout

Ordering information

9001-	<u>1</u>	<u>4</u>	<u>150</u>	<u>1</u>	<u>C</u>	<u>00</u>	<u>A</u>
Series	1: 2.54mm	4: Female	Position	1: Dip Length	C: Selective Gold Plated	00: G/F	A: Tray Package