


9001 Series

DIN41612 R Type Female

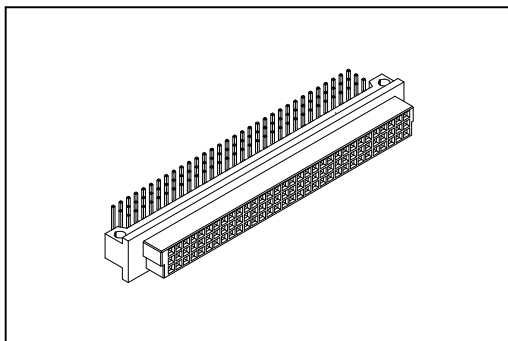

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -55°C ~ +125°C.

Features:

- * Mates with Male 3Row
9001-1196, 1164 C Type.
- 9001-1396, 1364 R Type.

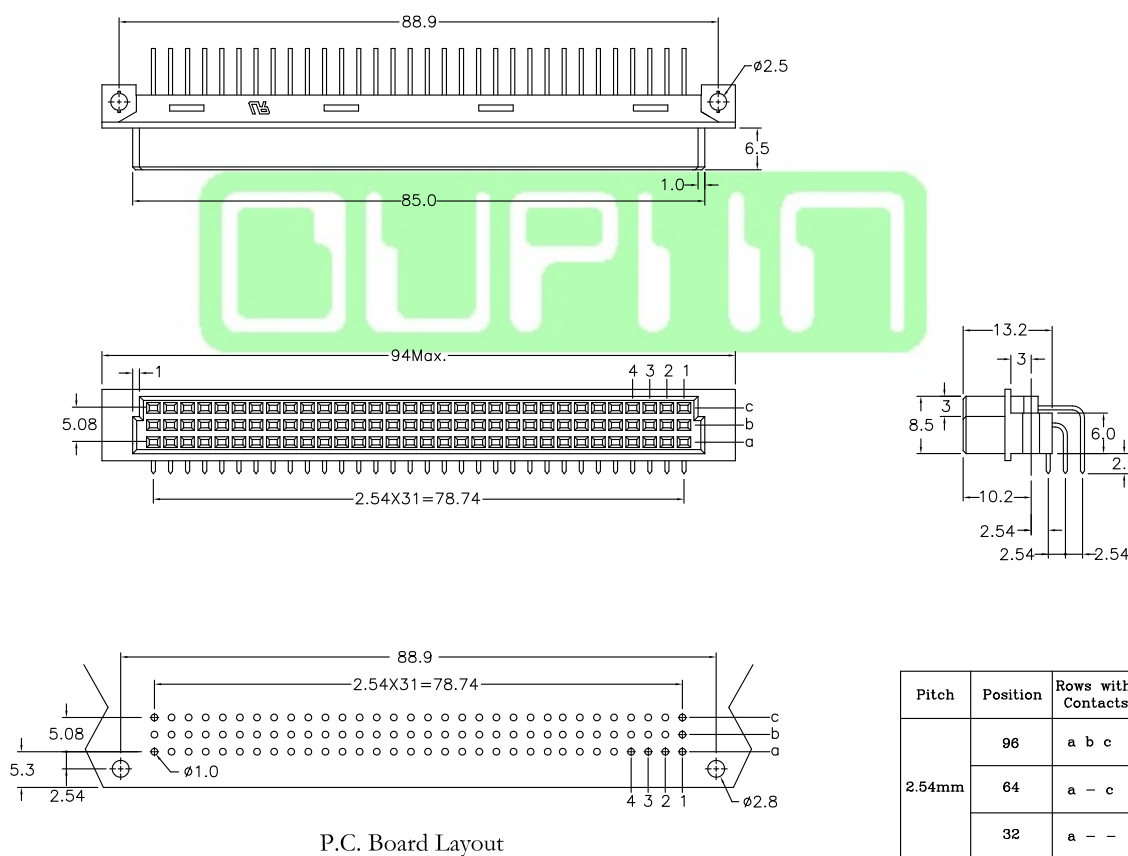

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a - c	
	32	a - -	
5.08mm	48	a b c	
	32	a - c	
	16	a - -	

Ordering information


9001- Series	<u>1</u> 1: 2.54mm 2: 5.08mm	<u>4</u> 4: Female	<u>96</u> Position	<u>1</u> 1: Dip Length	<u>C</u> C: Selective Gold Plated	<u>00</u> 00: G/F	<u>L1</u> Blank: W/O Lock L1: With Lock See Page CA03	<u>A</u> A: Tray Package
-----------------	------------------------------------	-----------------------	-----------------------	---------------------------	--------------------------------------	----------------------	--	-----------------------------

9001 Series


DIN41612 Mating Introduce




2 Row insulator
B (Standard mounting)
Mounting axis
of the connector

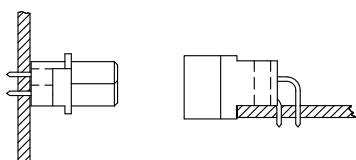


3 Row insulator
C (Standard mounting)
Mounting axis
of the connector




Board lock available
L1=P.C.B. Thickness 1.6 ~2.0 mm
L2=P.C.B. Thickness 2.8 ~3.2 mm




Q (Reverse mounting)
Mounting axis
of the connector



R (Reverse mounting)
Mounting axis
of the connector

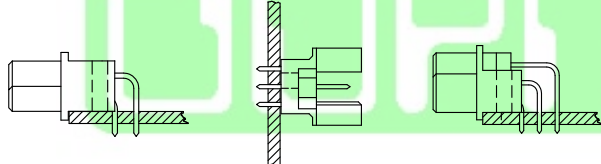


Board lock available
L1=P.C.B. Thickness 1.6 ~2.0 mm
L2=P.C.B. Thickness 2.8 ~3.2 mm

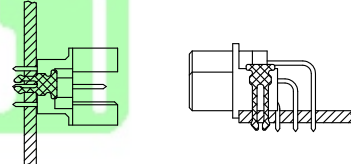


I.D.C. Type Ribbon Cable



2 Row insulator



3 Row insulator



Press Fit Type
2 Row insulator



3 Row insulator

