



OLYMPUS

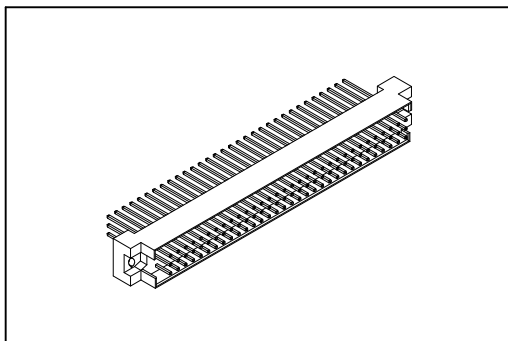




* Mates with Female 3Row
9001-1296,1264, C Type.
9001-1496,1464, R Type.
9001-1264, IDC Type.

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000M Ω min.
Contact Resistance: 20m Ω max.
Operating Temperature: -55°C ~+125°C.

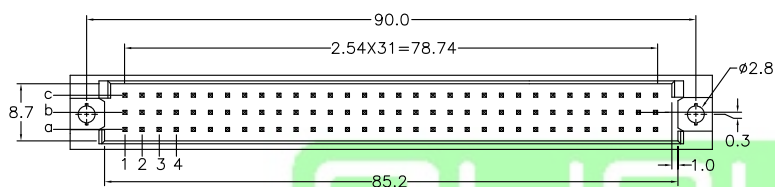

Press Fit Type

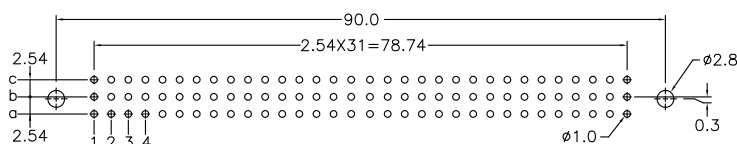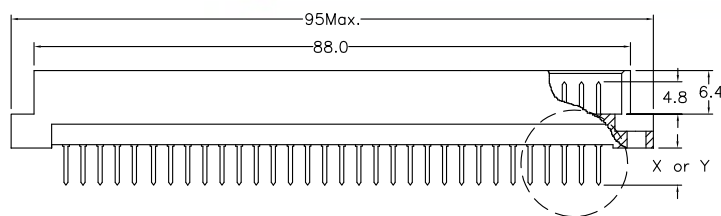

P.C. Board Layout

Length	1	2	W1	W2
X	4.0	2.5	13	17
Y	4.6	6.3	13	17

Pitch	Position	Rows with Contacts	Contact Arrangement
2.54mm	96	a b c	
	64	a - c	
	32	a - -	


<u>9001-</u>	<u>1</u>	<u>3</u>	<u>96</u>	<u>1</u>	<u>C</u>	<u>00</u>	<u>P</u>	<u>L1</u>	<u>A</u>
Series	1: 2.54mm 2: 5.08mm	3: Male	Position	1: Dip Length 2: Dip Length W1: Dip Length W2: Dip Length	C: Selective Gold Plated	00: G/F	Blank: Dip P: Press Fit	Blank: W/O Lock L1: With Lock See Page CA03	A: Tray Package

9001 Series


DIN41612 Mating Introduce




2 Row insulator
B (Standard mounting)
Mounting axis
of the connector

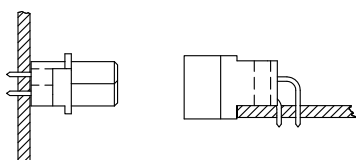


3 Row insulator
C (Standard mounting)
Mounting axis
of the connector





Board lock available
L1=P.C.B. Thickness 1.6 ~2.0 mm
L2=P.C.B. Thickness 2.8 ~3.2 mm




Q (Reverse mounting)
Mounting axis
of the connector



R (Reverse mounting)
Mounting axis
of the connector




Board lock available
L1=P.C.B. Thickness 1.6 ~2.0 mm
L2=P.C.B. Thickness 2.8 ~3.2 mm

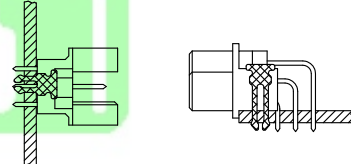


I.D.C. Type Ribbon Cable



2 Row insulator



3 Row insulator



Press Fit Type
2 Row insulator



3 Row insulator

