



# 9001 Series


## DIN41612 Mating Introduce



2 Row insulator  
B (Standard mounting)  
Mounting axis  
of the connector

3 Row insulator  
C (Standard mounting)  
Mounting axis  
of the connector


Board lock available  
L1=P.C.B. Thickness 1.6 ~2.0 mm  
L2=P.C.B. Thickness 2.8 ~3.2 mm

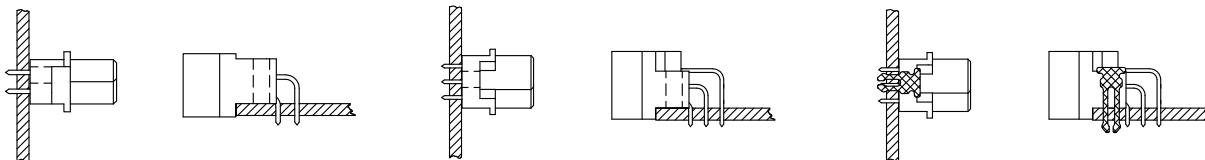

Q (Reverse mounting)  
Mounting axis  
of the connector

R (Reverse mounting)  
Mounting axis  
of the connector

Board lock available  
L1=P.C.B. Thickness 1.6 ~2.0 mm  
L2=P.C.B. Thickness 2.8 ~3.2 mm

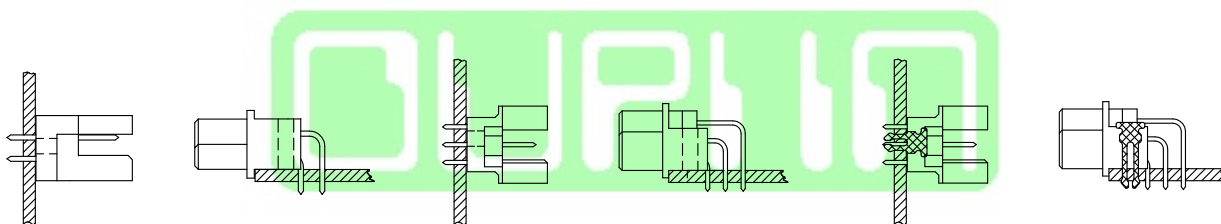

I.D.C. Type Ribbon Cable

Press Fit Type  
2 Row insulator

3 Row insulator

2 Row insulator

3 Row insulator

