


9001 Series

DIN41612 I.D.C. Type 2 Rows Female

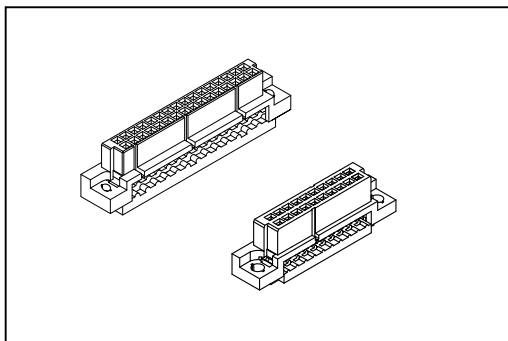

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -55°C ~+125°C.


Features:

* Mates with Male 2Row






9001-3532,9001-3520

9001-3732,9001-3720

32 PIN

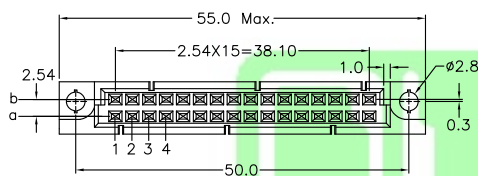

20 PIN

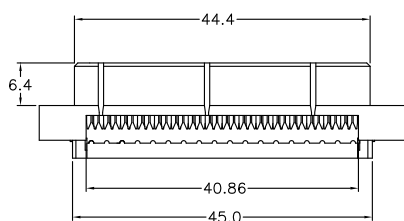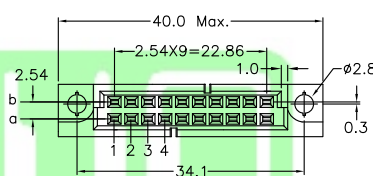

Ordering information

<u>9001-</u>	<u>3</u>	<u>6</u>	<u>32</u>	<u>IDC</u>	<u>00</u>	<u>A</u>
Series	3: 2Row Insulators For 1.27 Cable	6: Female	32: 32 Position 20: 20 Position		00: G/F	A: Tray Package