


9111 Series

Female Power Modules

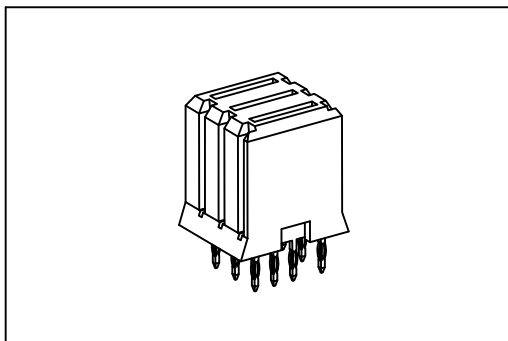

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 7.8 A.

Dielectric Withstanding Voltage: AC 1000V.






Insulator Resistance: 10000MΩ min.

Contact Resistance: 20mΩ max.


Operating Temperature: -55°C ~+125°C.

Features:

- * Power Contact.
- * Mates with male 9111-333



P.C. Board Layout



Ordering information

<u>9111-</u>	<u>3</u>	<u>4</u>	<u>3</u>	<u>1</u>	<u>C</u>	<u>10</u>	<u>D</u>	<u>U</u>
Series	3: 3 Row	4: Female	3 Position	1: Dip Length	C: Selective Gold Plated	10: 10 μ"	D: Dip Type P: Press Fit Type	U: Tube Package

Information including designs, specifications and components may be changed or updated without notice.

CE49