


9111 Series

H.D. 2.0mm(0.079") Futurebus(+)4 Rows Shroud

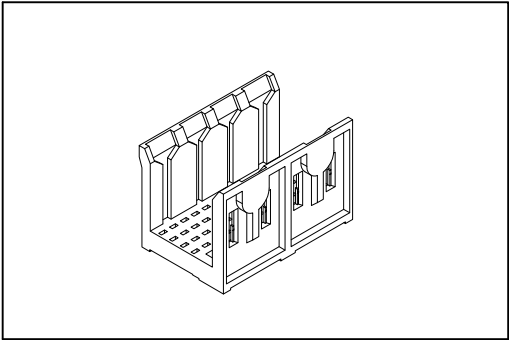

Material:





Housing: High Temperature Plastic UL94V-0.

Electrical Characteristics:

Operating Temperature: -55°C ~+125°C.

Features:

- * 2mm high density futurebus+ male shroud.
- * Available pin count from 24~192.
- * Side by side stackable.

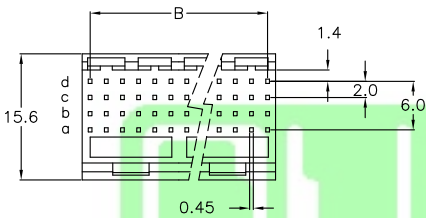

X Length	H1	H2	H3
	3.50	4.40	6.90
Position	Dimension		
	A	B	
24	11.95	10.0	
48	23.95	22.0	
72	35.95	34.0	
96	47.95	46.0	
120	59.95	58.0	
144	71.95	70.0	
168	83.95	82.0	
192	95.95	94.0	

Ordering information

9111-

Series

4

4: 4Rows

1

1: Male

24

Position

H1

H1: Housing Type

H2: Housing Type

H3: Housing Type

B

B: Bulk Package