


9111 Series

H.D. 2.0mm(0.079") Futurebus(+) 4 Rows Male Power Type

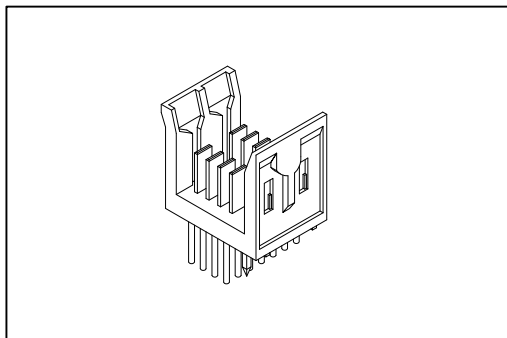

Material:



Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:


Current Rating: 3 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:



- * 2mm high density futurebus+ male power solder and press fit type.
- * 8 pins.
- * High current rating.
- * Side by side stackable.




Dip Type



Press Fit Type



Option A



P.C. Board Layout

Ordering information

| | | | | | | | | |
|--------------|----------|---------------|-----------|-----------------------------|--------------------------|-----------|----------------------------------|-----------------|
| <u>9111-</u> | <u>4</u> | <u>3</u> | <u>08</u> | <u>A</u> | <u>C</u> | <u>10</u> | <u>D</u> | <u>U</u> |
| Series | 4: 4Rows | 3: Male Power | Position | A: (A,B,E) See Page CB01 | C: Selective Gold Plated | 10: 10 μ" | D: Dip Type P: Press Fit Type | U: Tube Package |




9111 Series

H.D. 2.0mm(0.079") Futurebus(+)Connector Special Custom Loading Form






Signal Type

Male Custom Solder Tail Length Lay-out and Male Custom Premating Lay-out.

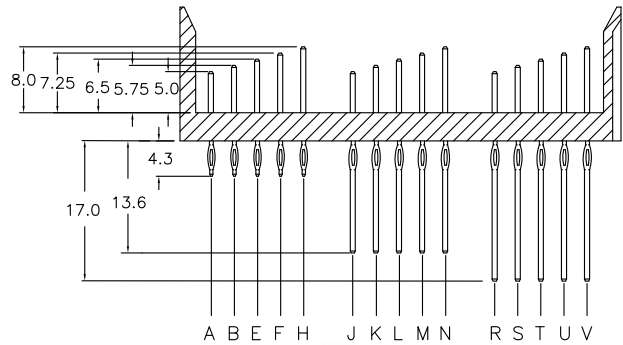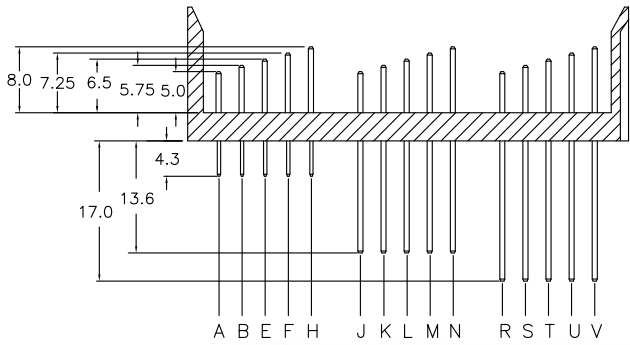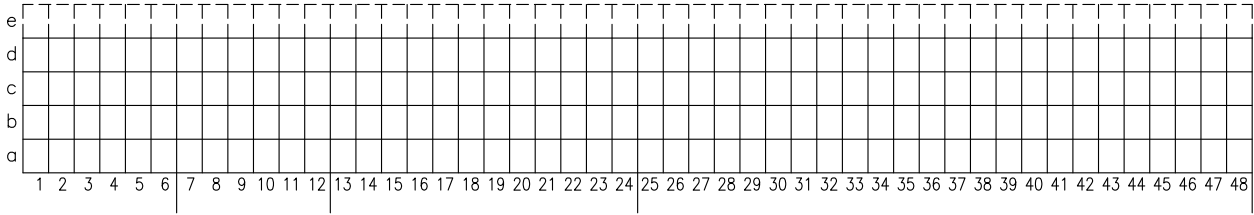

Power Type



* Other Custom lay-out please consult to factory.