


# 9111 Series

## H.D. 2.0mm(0.079") Futurebus(+)4 Rows Male Right Angle Type

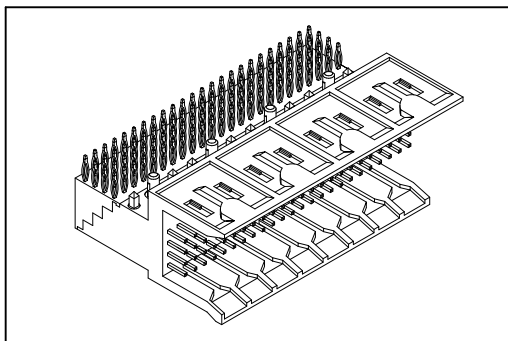

### Material:




Housing: High Temperature Plastic UL94V-0.  
Contacts: Copper Alloy.

### Electrical Characteristics:


Current Rating: 1 A.  
Dielectric Withstanding Voltage: AC 1000V.  
Insulator Resistance: 1000MΩ min.  
Contact Resistance: 30mΩ max.  
Operating Temperature: -55°C ~+125°C.

### Features:


- \* 2mm high density futurebus+ male right angle solder and press fit type.
- \* Side by side stackable.
- \* Push-Fit peg.

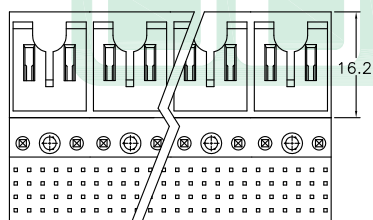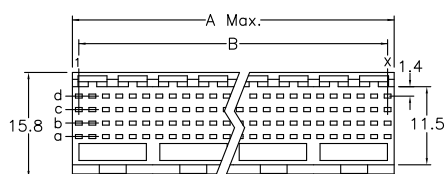

Dip Type



Press Fit Type

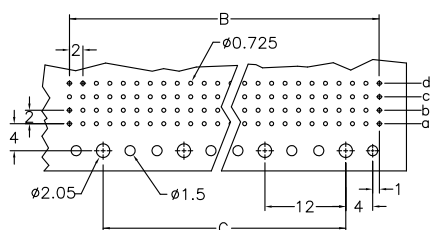

P.C. Board Layout

Contact Length (L)	A	5.00		
	B	5.75		
	E	6.50		
	F	7.25		
	H	8.00		
Dip Length (X)	1	2		
	2	3.53		
**Available Position				
Position	Dimension			
		A	B	C
*	24	11.95	10	
*	48	23.95	22	12
*	72	35.95	34	24
*	96	47.95	46	36
*	120	59.95	58	48
*	144	71.95	70	60
*	168	83.95	82	72
*	192	95.95	94	84

## Ordering information

9111- 4 5 24 A 1 C 10 D U  
 Series 4: 4Rows 5: Male Position A: A ~ H 1: Dip Length 2: Dip Length C: Selective Gold 10: 10 μ" D: Dip Type U: Tube Package  
 Signal Contact Length Plated Package

Information including designs, specifications and components may be changed or updated without notice.

CD05