


9111 Series

H.D. 2.0mm(0.079") Futurebus(+)4 Rows Female Dip Straight Type

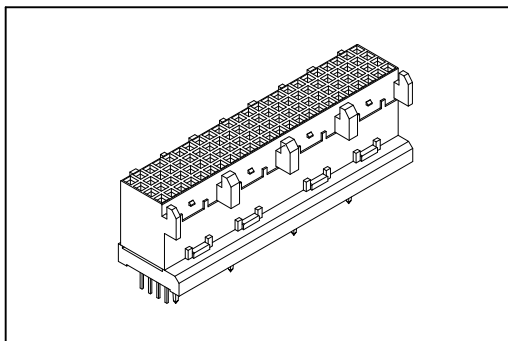

Material:

Housing: High Temperature Plastic UL94V-0.

Contact: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.





Insulator Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max.


Operating Temperature: -55°C ~+125°C.

Features:

- * 2mm high density futurebus+ female straight solder type.
- * Side by side stackable.

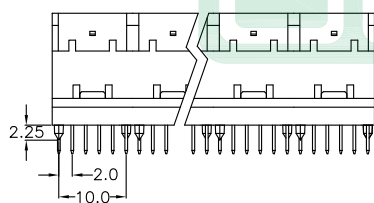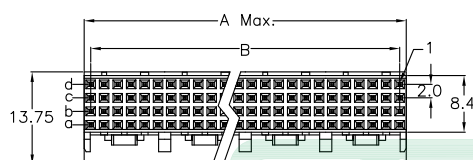

Board-to-Board Offset
Application Example

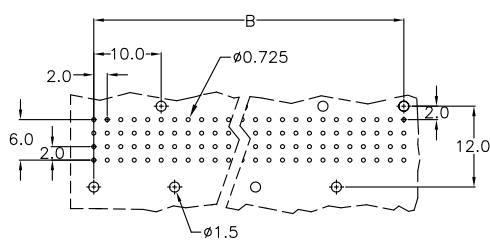

P.C. Board Layout

X Length	1	2
	3.45	4.25
*Available Position		
Position	Dimension	
	A	B
*	24	11.95
	48	23.95
	72	35.95
	96	47.95
	120	59.95
	144	71.95
	168	83.95
	192	95.95

Ordering information

9111-	4	6	24	1	C	10	D	H	U
Series	4: 4Rows	6: Female Straight	Position	1: Dip Length 2: Dip Length	C: Selective Gold Plated	10: 10 μ"	D: Dip Type	H: Spacer	U: Tube Package