


9111 Series

H.D. 2.0mm(0.079") Futurebus(+)5 Rows Shroud

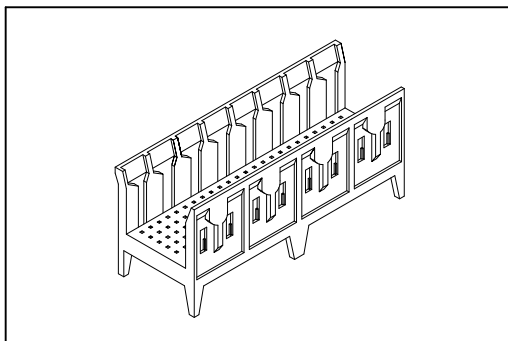

Material:


Housing: High Temperature Plastic UL94V-0.

Electrical Characteristics:

Operating Temperature: -55°C ~+125°C.

Features:

- * 2mm high density futurebus+ male shroud.
- * Available pin count from 30~390.
- * Side by side stackable.

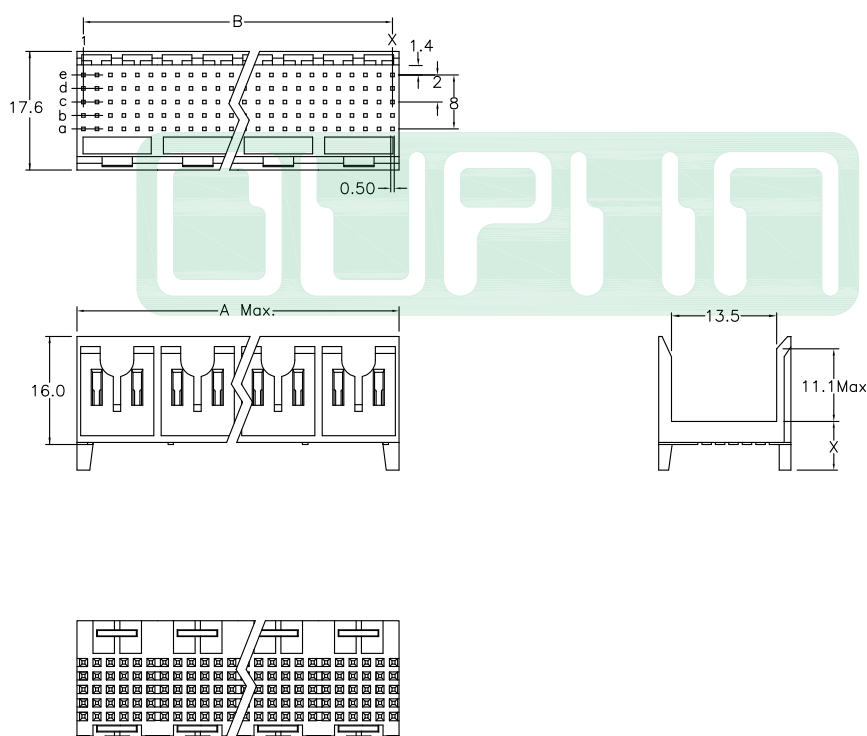

X Length		H1		H2		H3	
		3.50		4.40		6.90	
"*"Available Position							
H1	H2	H3	Position	Dimension			
				A		B	
*			30	11.95	10.0		
*			60	23.95	22.0		
			90	35.95	34.0		
			120	47.95	46.0		
*			150	59.95	58.0		
			180	71.95	70.0		
			210	83.95	82.0		
			240	95.95	94.0		
			270	107.95	106.0		
			300	119.95	118.0		
			330	131.95	130.0		
			360	143.95	142.0		
			390	155.95	154.0		

Ordering information

9111-
Series

5
5: 5Rows

1
1: Male

30
Position

H1
H1: Housing Type
H2: Housing Type
H3: Housing Type

B
B: Bulk Package