


9111 Series

H.D. 2.0mm(0.079") Futurebus(+) 5 Rows Female Right Angle Type

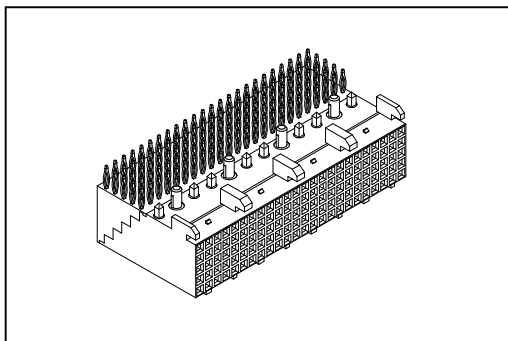

Material:




Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:


Current Rating: 1 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:


- * 2mm high density futurebus+ female right angle solder and press fit type.
- * Available pin count from 30~390.
- * Side by side stackable.
- * Push-Fit peg.

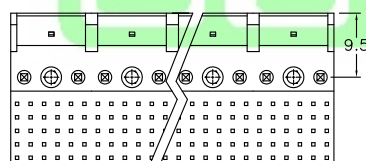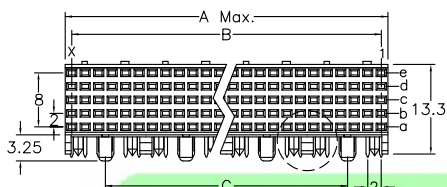

Dip Type



Press Fit Type

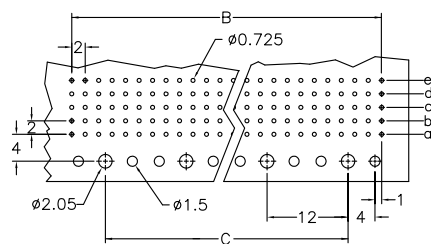

P.C. Board Layout

| X Length | 1 | 2 | |
|----------|-----------|-------|-------|
| | 2.90 | 3.53 | |
| Position | Dimension | | |
| | A | B | C |
| 30 | 11.95 | 10.0 | |
| 60 | 23.95 | 22.0 | 12.0 |
| 90 | 35.95 | 34.0 | 24.0 |
| 120 | 47.95 | 46.0 | 36.0 |
| 150 | 59.95 | 58.0 | 48.0 |
| 180 | 71.95 | 70.0 | 60.0 |
| 210 | 83.95 | 82.0 | 72.0 |
| 240 | 95.95 | 94.0 | 84.0 |
| 270 | 107.95 | 106.0 | 96.0 |
| 300 | 119.95 | 118.0 | 108.0 |
| 330 | 131.95 | 130.0 | 120.0 |
| 360 | 143.95 | 142.0 | 132.0 |
| 390 | 155.95 | 154.0 | 144.0 |

Ordering information

9111- 5 2 30 1 C 10 D U
 Series 5: 5Rows 2: Female Signal Position 1: Dip Length 2: Dip Length C: Selective Gold Plated 10: 10 μ" D: Dip Type P: Press Fit Type U: Tube Package